

OWNER'S MANUAL

LG Digital Signage

(MONITOR SIGNAGE)

Please read the user manual before using this product to ensure safe and convenient use.

43UM5N-H 49UM5N-H 55UM5N-H 65UM5N-H 43UM5N-E 49UM5N-E 55UM5N-E 65UM5N-E

TABLE OF CONTENTS

BASIC	3
- Checking the Accessories	3
- Learning the Buttons	4
GETTING READY	5
- Connecting the IR Sensors	5
- Kensington Lock Device	
CHECKING BEFORE	
INSTALLATION	7
- Installation Orientation	7
- Installation Location	8
- Wall Mount Holder	9
PDECAUTIONS FOR USE	40
PRECAUTIONS FOR USE	
- Dust	
- Afterimage	10
PRODUCT SPECIFICATIONS	12
LICENCE	17


This product is not intended for household use.

BASIC



- The accessories provided with your product may vary depending on the model or region.
- Product specifications or contents in this manual may be changed without prior notice due to upgrade of product functions.
- · SuperSign Software & Manual
 - Visit https://partner.lge.com to download the latest SuperSign software and manual.


Checking the Accessories

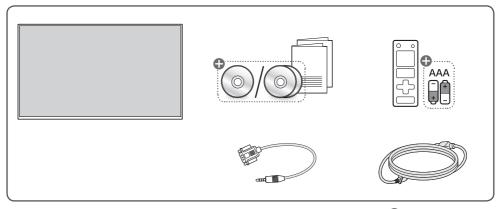

Depending on country

Learning the Buttons

The illustrations may differ depending on the model.

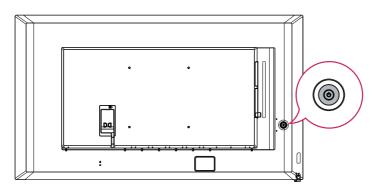



Power On (Press)

Quick Menu (Press ¹)

Menu Selection (Press ²)

Power Off ³ (Press and Hold)






Menu Control²

- 1 When the monitor is turned on, press the 🖒 button one time.
- 2 You can use the function when you control menu.
- 3 All running apps will close.

Quick Menu





Accesses the main menu.



Changes the input source.


Close the quick menu.

GETTING READY

Connecting the IR Sensors

Connecting the cable to the product allows it to receive signals from the remote control. Rotate the IR sensor according to horizontal or vertical use.


- The illustrations may differ depending on the model.

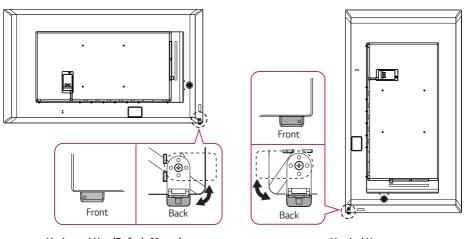

Horizontal Use (Default Mount)

Vertical Use

You can hide the IR sensor.




Kensington Lock Device

(This feature applies only to some models.)

The Kensington lock device connector is located on the back of the monitor. For more information on installation and use, refer to the user manual provided with the locking device.

Connect the Kensington security system cable between the monitor and a table.





NOTE

- The Kensington lock device is an optional specification.
- This is a general illustration of installation and may look different from the product held by the customer.

CHECKING BEFORE INSTALLATION

We are not responsible for product damage caused by failure to follow the guide.


Installation Orientation

Using Vertically


When installing vertically, rotate the monitor 90 degrees anti-clockwise while facing the front of the screen.



Tilt Angle



Ceiling, Floor Orientation




Installation Location

We are not responsible for product damage caused by failure to follow the guide.

Indoor

Installing on a Wall






A:0 mm (0 inches) or more

 The warranty will not cover any damage caused by using the product in direct sunlight on the front panel.

Installing on a Recessed Wall





A:0 mm (0 inches) or more

- B: 50 mm (1.9 inches) or more
- C: 70 mm (2.7 inches) or more
- The warranty will not cover any damage caused by using the product in direct sunlight on the front panel.

Outdoor

Outdoor Enclosed




Wall Mount Holder

To install the monitor on a wall, attach a wall mount holder (optional) to the back of the monitor.

Take caution, and ensure that the wall mount holder (optional) is securely fixed to the monitor and to the wall.

The VESA dimensions of the wall mount by model are as follows.



Model	VESA Dimensions (A x B) (mm)	Standard	Length (Maximum) (mm)	0
Model	VESA Dimensions (A x B) (inches)	Dimensions	Length (Maximum) (inches)	Quantity
43UM5N-H	200 x 200	ME	13	4
43UM5N-E	7.8 x 7.8	- M6	0.5	4
49UM5N-H	300 x 300	- M6	13	4
49UM5N-E	11.8 x 11.8	IVIO	0.5	4
55UM5N-H	300 x 300	- M6	13	4
55UM5N-E	11.8 x 11.8		0.5	4
65UM5N-H	300 x 300	NAC .	13	4
65UM5N-E	11.8 x 11.8	M6	0.5	4



- Disconnect the power cord first, and then move or install the monitor. Otherwise, it may result in electric shock.
- · If the monitor is installed on a ceiling or inclined wall, it may fall and result in injury.
- Damage to the monitor by tightening the screws too tightly may void your warranty.
- Use screws and wall mount plates conforming to VESA standards. Breakage or personal injury due to use or misuse
 of inappropriate components is not covered by the warranty of this product.



- · Using screws longer than the indicated depth may damage the inside of the product. Be sure to use the proper length.
- For more information on installation, please refer to the user manual for the wall mount.

PRECAUTIONS FOR USE

Dust


The warranty will not cover any damage caused by using the product in an excessively dusty environment.

Afterimage

- · After-image appears when the product is turned off.
 - Pixels may be damaged rapidly if a still image is displayed on the screen for a long period of time. Use the screensaver function.
 - Switching from a screen with high differences in luminance (black and white or grey) to a darker screen may cause an afterimage. This is normal due to the display characteristics of this product.
- When the LCD screen is in a still pattern for extended periods of use, a slight voltage difference may occur between
 the electrodes that operate the liquid crystal (LC). The voltage difference between the electrodes increases over time
 and tends to keep the liquid crystal aligned in one direction. At this time, the previous image remains, which is called
 an afterimage.
- Afterimages do not occur when continuously changing images are used but take place when a certain screen is fixed
 for a long time. The following are operational recommendations for reducing the occurrence of afterimages when
 using a fixed screen. The maximum recommended time for switching the screen is 12 hours. Shorter cycles are better
 for preventing afterimages.

- Recommended Usage Condition
 - 1 Change the background color and text color at equal intervals.
 - Afterimages occur less when the colors to be changed are complementary to one another.





ITO or MoTi Pixel Layer

- 2 Switch the screen at equal time intervals.
- Take caution, and ensure that text or images from before the screen change are not left in the same location after the screen change.



PRODUCT SPECIFICATIONS

Without prior notice, all product information and specifications contained in this manual are subject to change to improve the performance of the product.

Input/Output Ports	LAN IN, HDMI [™] IN 1/2/3, DP IN, HDMI [™] OUT, USB 2.0 IN, RS-232C IN, RS-232C OUT, IR&LIGHT SENSOR, AUDIO OUT		
Resolution	Recommended Resolution	LIDMI 1 2 2 / Display Parks 2040 v. 2160 @ 60 LI-	
Resolution	Max Resolution	HDMI 1,2,3 / DisplayPort: 3840 x 2160 @ 60 Hz	
Embedded battery	Applied		
	Operating Temperature Operating Humidity	0 °C to 40 °C (32 °F to 104 °F) 10 % to 80 % (Condition for preventing condensation)	
Environmental Conditions	Storage Temperature Storage Humidity	-20 °C to 60°C (-4 °F to 140 °F) 5 % to 85 % (Condition for preventing condensation) * Product box packaging storage conditions	



- Video Daisy Chain can be configured through HDMITM OUT, and input resolution can support up to 3840×2160 at 30 Hz, and it cannot be above 30 Hz.

43UM5N-H, 43UM5N-E

Power Voltage	100-240 V~ 50/60 Hz 1.5 A	
Dawar Canaumatian	On Mode	100 W (Typ.)
Power Consumption	Sleep Mode / Standby Mode	≤ 0.5 W
Size (Width x Height x Depth)	968 mm x 568 mm x 57.7 mm / 9.0 kg	
/ Weight	(38.1 inches x 22.3 inches x 2.2 inches / 19.8 lbs)	

49UM5N-H, 49UM5N-E

Power Voltage	100-240 V~ 50/60 Hz 1.7 A	
Dougs Consumption	On Mode	120 W (Typ.)
Power Consumption	Sleep Mode / Standby Mode	≤ 0.5 W
Size (Width x Height x Depth)	1102 mm x 644 mm x 57.7 mm / 11.4 kg	
/ Weight	(43.3 inches x 25.3 inches x 2.2 inches / 25.1 lbs)	

55UM5N-H, 55UM5N-E

Power Voltage	100-240 V~ 50/60 Hz 1.8 A	
Dougs Consumption	On Mode	130 W (Typ.)
Power Consumption	Sleep Mode / Standby Mode	≤ 0.5 W
Size (Width x Height x Depth)	1237 mm x 720 mm x 57.7 mm / 14.2 kg	
/ Weight	(48.7 inches x 28.3 inches x 2.2 inches / 31.3 lbs)	

65UM5N-H, 65UM5N-E

Power Voltage	100-240 V~ 50/60 Hz 2.0 A	
Dawar Canaumatian	On Mode	145 W (Typ.)
Power Consumption	Sleep Mode / Standby Mode	≤ 0.5 W
Size (Width x Height x Depth)	1458 mm x 843 mm x 57.7 mm / 21.6 kg	
/ Weight	(57.4 inches x 33.1 inches x 2.2 inches / 47.6 lbs)	

HDMI / DisplayPort (PC Mode)

Resolution	Horizontal frequency (kHz)	Vertical frequency (Hz)	Remark
800 x 600	37.879	60.317	
1024 x 768	48.363	60	
1280 x 720	44.772	59.855	
1280 x 1024	63.981	60.02	
1680 x 1050	65.29	59.954	
1920 x 1080	67.5	60	
3840 x 2160	67.5	30	HDMI1/2/3, DisplayPort
3840 x 2160	135	60	HDMI1/2/3, DisplayPort

HDMI / DisplayPort (DTV Mode)

Resolution	Horizontal frequency (kHz)	Vertical frequency (Hz)	Remark
480/60p	31.5	60	
576/50p	31.25	50	
720/50p	37.5	50	
720/60p	45	60	
1080/50i	28.1	50	
1080/60i	33.75	60	
1080/50p	56.25	50	
1080/60p	67.432	59.94	
1080/60p	67.5	60	
2160/30p	67.5	30	HDMI1/2/3, DisplayPort
2160/50p	112.5	50	HDMI1/2/3, DisplayPort
2160/60p	135	60	HDMI1/2/3, DisplayPort



- Horizontal frequency: The horizontal interval is the time taken to display one horizontal line. When 1 is divided by
 the horizontal interval, the number of horizontal lines displayed every second can be tabulated as the horizontal
 frequency. The unit is kHz.
- Vertical frequency: The product display functions by the screen image changing dozens of times every second like a fluorescent lamp. The vertical frequency or refresh rate is the number of image displays per second. The unit is Hz.

Wireless module (LGSBWAC95) Specifications			
Wireless LAN (IEEE 802.11a/b/g/n/ac)			
Frequency range (MHz) Output power (Max.) (dBm)			
2400 to 2483.5 18.5			
5150 to 5725			
5725 to 5850 18			
Bluetooth			
Frequency range (MHz) Output power (Max.) (dBm)			

- As band channels can vary per country, the user cannot change or adjust the operating frequency. This product is configured for the regional frequency table.
- For consideration of the user, this device should be installed and operated with a minimum distance of 20 cm (7.8 inches) between the device and the body.
- FCC ID: BEJLGSBWAC95 / IC: 2703H-LGSBWAC95

2400 to 2483.5

LICENCE

Supported licenses may differ by model. For more information of the licenses, visit www.lg.com.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

Manufactured under license from Dolby Laboratories. Dolby, Dolby Vision, Dolby Vision IQ, Dolby Audio, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation.



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by LG Electronics Inc. is under license. Other trademarks and trade names are those of their respective owners.



Supplier's Declaration of Conformity

Trade Name LG

Responsible LG Electronics USA, Inc.

Party

Address 111 Sylvan Avenue, North Building,

Englewood Cliffs, NJ 07632

E-mail lg.environmental@lge.com

The model and serial number of the product are located on the back and on one side of the product. Record them below in case you ever need service.



SERIAL NO.



This product qualifies for ENERGY STAR®.

Changing the factory default configuration and settings or enabling certain optional features and functionalities may increase energy consumption beyond the limits required for ENERGY STAR® certification.

Refer to ENERGYSTAR.gov for more information on the ENERGY STAR® program.

Temporary noise is normal when powering ON or OFF this device