6.3 cu. ft. Gas Slide-in Range

LG

- Built-in Air Fry
- InstaView® Window
- ProBake® Convection
- EasyClean® + Self Clean
- UltraHeat 20k BTU Power Burner
- Slide-in Design
- 6.3 cu ft. Large Capacity
- Storage Drawer
- LG ThinQ® Technology (Wi-Fi)

COLOR AVAILABILITY	
LSGL6335X – PrintProof™ Stainless Steel	
LSGL6335Z – PrintProof™ Black Stainless Steel	

CAPACITY	
Oven Capacity	6.3 cu. ft.
Drawer Capacity	0.8 cu. ft.

OVEN FEATURES	
Convection System	ProBake® Convection
Oven Cooking Modes	
Bake, Convection Bake, Convection Roast, Broil High, Broil Low, Warm, Proof, Frozen Meal, Air Fry, Slow Cook, EasyClean®, Self Clean	
Air Sous Vide	No
Built-in Air Fry	Yes (Air Fry Tray Included)
Temperature Probe	No
Oven Racks	1 Offset, 1 Heavy Duty
Number of Rack Positions	7
Broil Element (BTU, NG / LP)	13,500 / 12,500
Bake Element (BTU, NG / LP)	19,000 / 17,000
Convection Conversion	Yes
EasyClean®	Yes
Self Clean	Yes
GoCook Smart Oven Light	Yes (1)
Door Lock	No
Automatic Safety Shut-Off	After 12 Hours

DRAWER FEATURES	
Type	Storage

COOKTOP FEATURES	
Cooktop Type	Sealed
Number of Burners	5
Burner BTU (NG / LP)	
Left Front	18,000 / 12,000
Left Rear	9,100 / 7,500
Center	10,000 / 10,000 (Oval)
Right Front	20,000 / 12,500 (UltraHeat™)
Right Rear	5,000 / 4,000
Cooktop Burner Grate Material	Cast Iron
Continuous Grates	Yes

CONTROLS	
Cooktop Control Type	Front Tilt-Control Knobs
Oven Control Type	SmoothTouch™ Glass
Display	LED (White)
Language	English
Kitchen Timer	Yes
Timed Cook	Yes
Clock	Yes
Temperature Unit of Measure	˚F or ˚C
Cooking Complete Reminder Volume	High, Low, Off
Oven Control Lock	Yes

CONVENIENCE	
ADA Compliant	No
Sabbath Mode	Yes (Star-K-Certified)

SMART FEATURES	
Wi-Fi Enabled	Yes
ThinQ® Technology	Yes
ThinQ Care™	Yes
Voice Control	Amazon Alexa, Google Assistant
SmartDiagnosis™	Yes
Smart Recipe (3rd Party Apps)*	Yes (SideChef, Innit, Nestle, Kraft-Heinz)

FINISHES AND APPEARANCE

Fingerprint & Smudge Resistant Exterior	Yes
Cooktop Finish	X – EasyClean® Stainless Steel Z – Black Porcelain Enamel
Handle / Knobs	X - Stainless Steel Appearance Z - Black Stainless Steel Appearance
Oven Door Feature	InstaView® Window (WideView™)

TECHNICAL SPECS

Fuel Type	NG / LP
Required Power Supply	120V, 60Hz
Minimum Circuit Rating	15 Amp
Power Cord Type	3-Prong, Attached to Unit
Power Outlet Location	See Installation Diagram
Gas Supply Location	See Installation Diagram

INCLUDED ACCESSORIES

1 Offset Rack, 1 Heavy Duty Rack, 1 Air Fry Tray, Cast Iron Griddle, Rear Filler Kit, Anti-Tip Kit, LP Conversion Kit, Spray Bottle, Scouring Pad, Broiler Pan and Grid

OPTIONAL ACCESSORIES

Slide-in Range Filler Kit (Side Gaps)	LSFL301S

DIMENSIONS / CLEARANCES / WEIGHTS

|	
Product Dimensions (W x H x D w/Handle)	29 $\frac{7}{8}$" x 37 $\frac{1}{8}$" x 29 $\frac{5}{16}$"
Product Height to Cooking Surface	36"
Cutout Dimensions (W x H x D)	30" x 36" x 25"
Carton Dimensions (W x H x D)	32 $\frac{1}{2}$" x 44" x 30 $\frac{1}{2}$"
Approx. Weight (Product / Carton)	157.7 lbs. / 200.3 lbs.

LIMITED WARRANTY

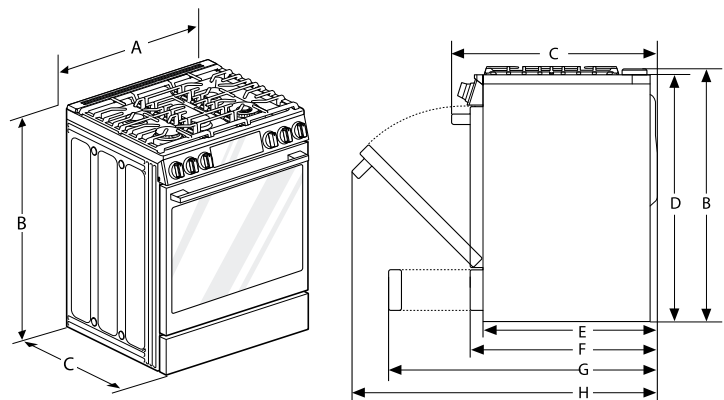|	
Parts and Labor	1 Year

DIMENSIONS / CLEARANCES

Provide proper clearance between the range and adjacent combustible surfaces. These dimensions must be met for safe use of your range. The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements. The range may be placed with 0" clearance (flush) at the back wall.
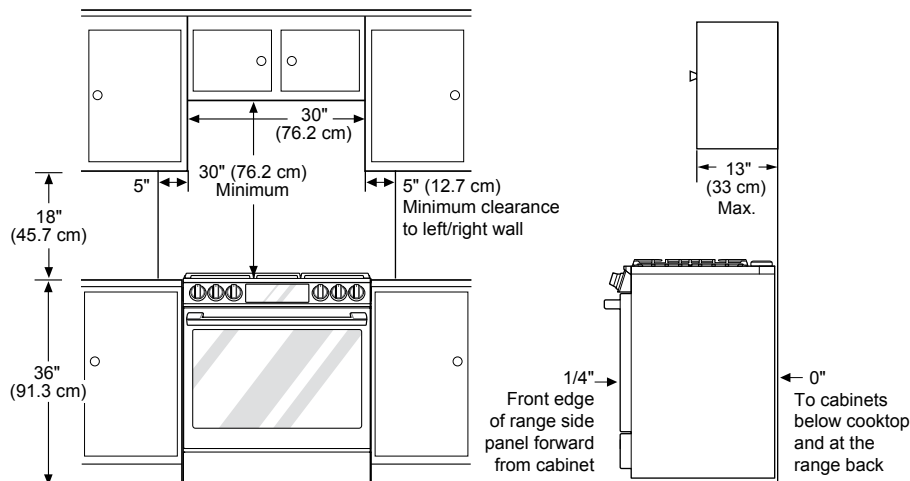
GAS PIPE AND ELECTRICAL OUTLET LOCATIONS
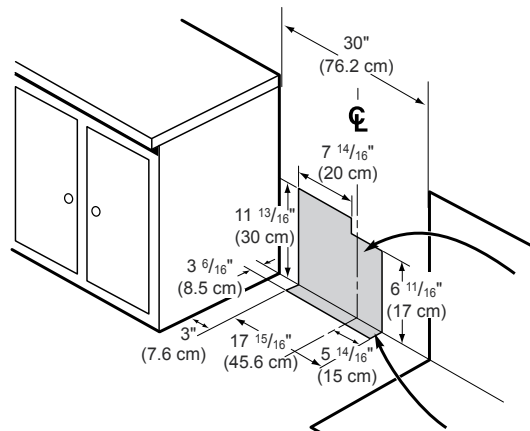
DIMENSIONS / CLEARANCES

	DIMENSIONS / CLEARANCES	
A	Width	29 $\frac{7}{8}$" (758.8 mm)
B	Height	37 $\frac{1}{8}$" (943mm)
C	Depth (Includes Door Handle)	29 $\frac{5}{16}$" (743.9 mm)
D	Height (Excludes Vent Trim)	36" (913.0 mm)
E	Depth (Includes only the product body that is loaded into the cabinet. Excludes door and handles)	24 $\frac{3}{4}$" (629.4 mm)
F	Depth (Excludes Door Handle)	26 $\frac{7}{8}$" (683 mm)
G	Depth when drawer is fully opened	38 $\frac{7}{16}$" (976.7 mm) 36 $\frac{1}{16}$" (916.2 mm) (Excludes handle)
H	Depth when door is fully opened	48 $\frac{5}{8}$" (1235.9 mm)