

# JVX5365SJ

**GE® 36" ENERGY STAR Certified Under The Cabinet Hood**

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


WB02X11537 replacement grease filter and JXCF55 replacement charcoal filter are available for additional cost. Call toll-free 800.626.2000.

**Installation Information:** Before installing, consult installation instructions, packed with product, for current dimensional data.


### Additional accessories:

JXS56SS 15" cabinet spacer  
JXDA22 optional damper

AMP RATING	
120V	2.5

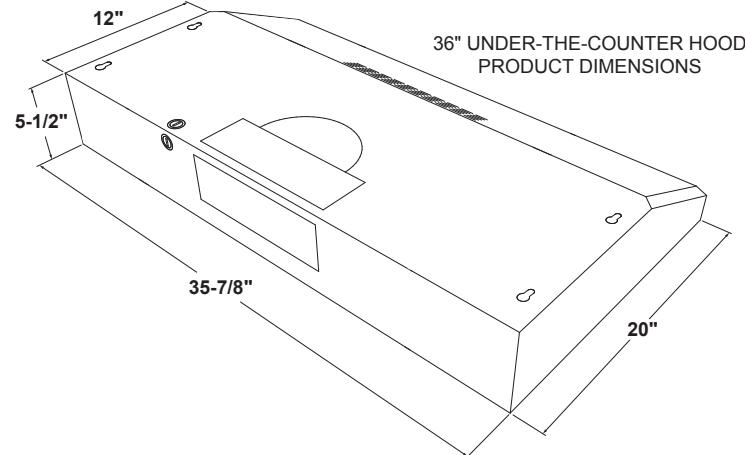

36" UNDER-THE-COUNTER HOOD  
PRODUCT DIMENSIONS

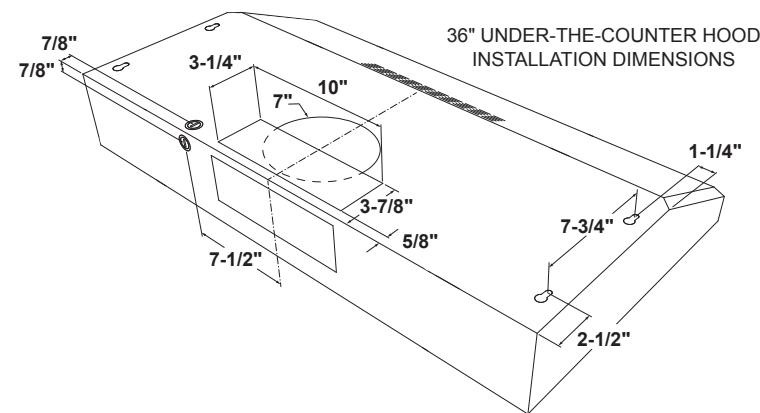

36" UNDER-THE-COUNTER HOOD  
INSTALLATION DIMENSIONS

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



ENERGY STAR



10-MINUTE  
INSTALL



Listed by  
Underwriters  
Laboratories



Specification Revised 6/20

# JVX5365SJ

## GE® 36" ENERGY STAR Certified Under The Cabinet Hood

### FEATURES AND BENEFITS

Easy installation – 10 minutes or less by one person

Two-speed, 270-CFM venting system – Removes smoke, grease, odors and moisture

Front controls – Enjoy easy access and a subtle appearance

Dual LED lighting – Choose bright light while cooking


Convertible venting options – Select recirculating or external venting

Vertical and rear exhaust – Exhausts from the top or rear of the hood

Appearance (Fully enclosed bottom) – Enjoy a sleek appearance from every angle

Dishwasher safe filter – Filters grease and is dishwasher-safe

Model JVX5365SJSS – Stainless steel

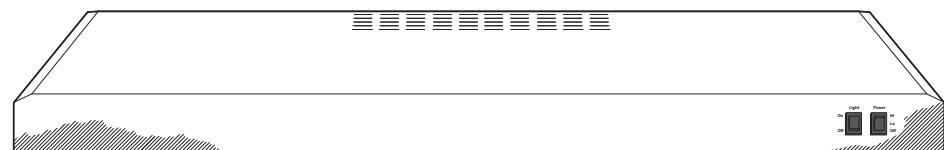

### CFM/SONES RATINGS

Exhaust High Speed (HS)	270/4.5
Exhaust Low Speed (LS)	100/1.5

\*Not ENERGY STAR Certified if hood is installed in a non-vented configuration.

