



Features and Benefits

Key Features

- Large Capacity at 4.2 Cu.Ft.
- EcoClean™ 2-Hour Self-Clean Cycle
- Recessed Broil Element for Increased Capacity and Safety

Design

- Contemporary Stainless Steel Design
- . ClearTouch® Glass Control
- Flush-to-Cabinet Design
- Dial Controls Direct Access to Cooking Modes

Performance

- 10 Cooking Modes for Convenient Every Day Cooking
- Convection Cooking with Bake, Broil and Roast in Upper Oven
- Thermal Cooking with Bake, Broil and Roast in Lower Oven

Efficiency

Convenience

- Amber Colored Display
- Timer with Cook Time Function
- Extra Large Door Window for Easy Monitoring of Cooking
- . High Quality Self-cleaning Rack Supports
- Preheat Monitor Shows Progress of Preheat Cycle


Capacity

- Double Oven for More Capacity and Cooking Flexibility
- Hidden Bake Element for Increased Capacity

Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be foundin a ccompanying product literature or you may contact your account manager for further details.



315.000

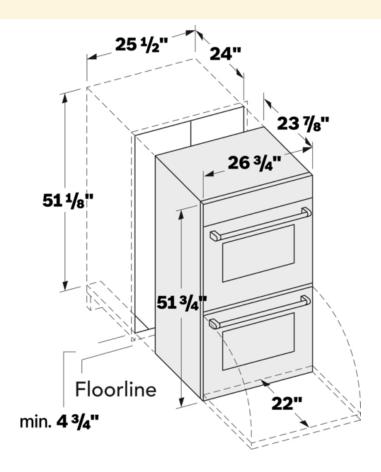

Features	
Cooking mode	Convection Bake,
_	Convection Broil,
	Conventional heat,
	Dough proving setting,
	Half width variable
	grill, Intensive hot air,
	Pizza setting, warming
Cooking method secondary cavity	Top/bottom heating,
	Top heating, 1/3 bottom
	heat., Variable small-
	area grill, Warming
Integrated Cleaning system	
Number of interior lights	1
Timer	Yes
Included accessories	3 x oven racks /upper,
	2 x oven racks /lower
Bake Element Wattages primary cavity	2000
Broil Element Wattages primary cavity	3600
Convection Element Wattages primary	2000
cavity	
Microwave Wattages	
Technical Specification	
UPC code	825225840206
Product color	Stainless steel
Alternative colors available	
Energy source	Electric
Watts	9200
Fuse protection	40
Volts	240/208
Frequency	60
Approval certificates	CSA
Power Cord Length	50
Plug type	fixed connection,
	no plug
Required cutout size (HxWxD) (in)	51 1/8" x 25 1/2" x 24"
Overall appliance dimensions (HxWxD) (in)	51 3/4" x 26
	3/4" x 23 7/8"
Product packaging dimensions (HxWxD)	56 3/4" x 34" x 31"
	281

Notes: All height, width and depth dimensions are shown in inches. *Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be foundin a ccompanying product literature or you may contact your account manager for further details.

Gross weight