



Product Specifications

24" Refrigerators / Wine Refrigerators

- Store additional ingredients and wine where you need it most
- Adjustable interior with 19 possible positions for shelves, wine racks and bin accessories.
- Designed for built-in or freestanding applications
- Wine refrigerator models include 5 slide-out wine racks
- Refrigerator models include 2 slide-out metal shelves



VCRE524-SG33A



VCRE524-SS33A



VCWC524-SG33A



VCWC524-SS33A

Model	Description	Voltage/Hz	Shipping Weight
VCRE524-SG33A	Refrigerator 24" Reversible Hinge Glass Door	115v / 60hz	165 lb
VCRE524-SS33A	Refrigerator 24" Reversible Hinge Solid Door	115v / 60hz	150 lb
VCWC524-SG33A	Wine Refrigerator 24" Reversible Hinge Glass Door	115v / 60hz	168 lb
VCWC524-SS33A	Wine Refrigerator 24" Reversible Hinge Solid Door	115v / 60hz	153 lb

Specifications


VCRE524-SG33A dimensions: 33 1 ¹ / ₁₆ " H x 23 5 ⁸ / ₈ " W x 22 1 ⁵ / ₁₆ " D
VCRE524-SS33A dimensions: 33 1 ¹ / ₁₆ " H x 23 5 ⁸ / ₈ " W x 22 1 ⁵ / ₁₆ " D
VCWC524-SG33A dimensions: 33 1 ¹ / ₁₆ " H x 23 5 ⁸ / ₈ " W x 22 1 ⁵ / ₁₆ " D
VCWC524-SS33A dimensions: 33 1 ¹ / ₁₆ " H x 23 5 ⁸ / ₈ " W x 22 1 ⁵ / ₁₆ " D
VCWC524 models hold up to 35 wine bottles
Adjustable bright white or blue LED lighting
Convection cooling system provides a quick cool down and consistent temperature
Environmentally friendly R600a refrigerant: VCRE524-SG33A: 1.34 oz / VCRE524-SS33A: 1.06 oz / VCWC524-SG33A: 1.34 oz / VCWC524-SS33A: 1.59 oz
Full-depth lower interior with a volume of 5.2 cu ft
High efficiency variable speed compressor
NSF/ANSI Standard 7 compliant
Stainless steel cabinet, grille, and full-wrap door with lock
Temperature range: 34°F – 70°F

Accessories	Description	Shipping Weight
ULACASTERKIT24	24" Caster Kit	13 lb
ULAWINERACK24	Slide-out Wine Rack	8 lb
ULABIN24	Slide-out Bin	9 lb
ULASHELF24	Slide-out Metal Shelf	4 lb




Product Specifications • 24" Refrigerators / Wine Refrigerators


Top

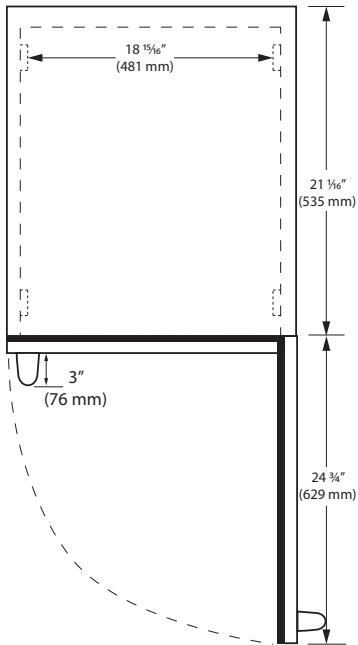


Front

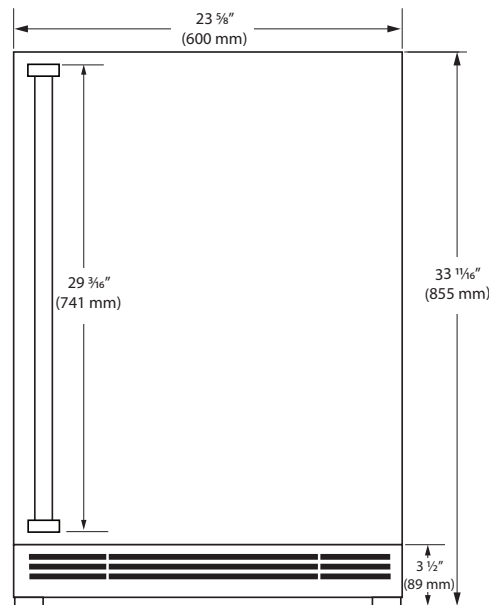


Side

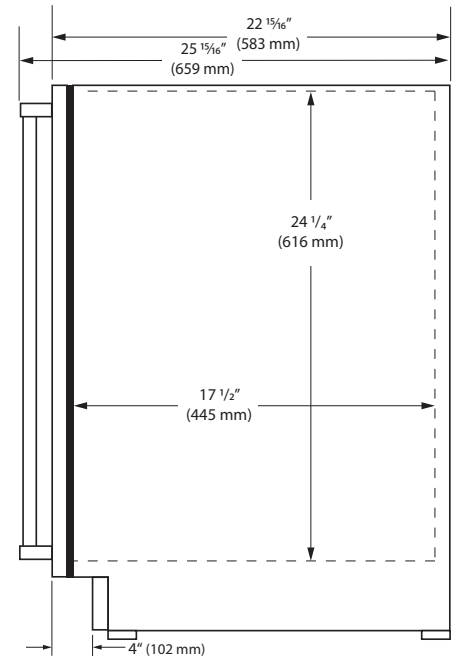

Back

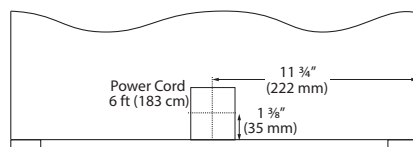

Cabinet Cut-Out

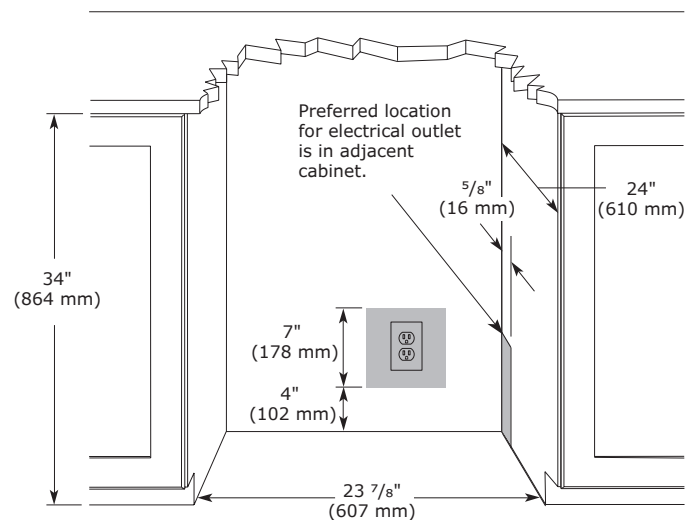

Commercial Warranty

1 Year (parts & labor) / 5 year sealed system (parts)
See complete warranty for details

Installation Notes

- Power cord extends 2" beyond total depth
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow