

HOME SOLUTIONS - LAUNDRY

DLE8400\_E / DLG8401\_E



7.3 cu. ft. Rear Control Dryer with LG EasyLoad™ Door and AI Sensing

- 7.3 cu. ft. Ultra Large Capacity
- EasyLoad™ Door
- Built-In Intelligence: AI Sensor Dry™ / Smart Pairing™
- Electronic Control Panel with LED Display
- FlowSense® Duct Clogging & Lint Filter Indicators
- Aluminized Alloy Steel Drum
- LoDecibel® Quiet Operation
- Reversible Door
- Wrinkle Care Option

AVAILABLE COLORS

- MATTE BLACK
- ALPINE WHITE



LG ThinQ®


Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



SUMMARY		FABRIC CARE FEATURES		MATERIALS AND FINISHES	
Type	Rear Control Top Load Dryer	AI Sensor Dry	Yes	Aluminized Alloy Steel Drum	Yes
Vent Type	Vented	Precise Temperature Control with Variable Heater	Yes	NeveRust® Stainless Steel Drum	No
Dryer Type	Electric / Gas	Steam	No	Drum Rear	Painted Steel
Capacity	7.3 cu. ft.	CONVENIENCE FEATURES		Cabinet	Painted Steel
Matching Washer	WT8400C_ / WT8405C_	3 Minute Installation Check	Yes	Door / Trim	Glass / Black
Sensor Dry	Yes	LoDecibel® Quiet Operation	Yes	Top Cover Material	Steel
Steam	No	End of Cycle Signal	Yes	All Available Colors	Matte Black (B) Alpine White (W)
Color	Matte Black (B) Apine White (W)	Drum Light (Door open)	Yes	POWER SOURCE	
APPEARANCE		Reversible Door	Yes	Ratings	CSA Listed
EasyLoad® Door	Yes	FlowSense® Duct Clogging Indicator	Yes	Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Control & Display	Electronic Control Panel with LED Display	Wrinkle Care Option	Yes	Plug	Elec Not Included Gas: Included
Dial-A-Cycle®	Yes	Control Lock	Yes	Plug Type	Elec: 4-Wire or 3-Wire (Homes built after 1996 require 4-Wire) Gas: 3 Prong
DRYER PROGRAMS		Venting Option	Yes		
No. of Programs	8	4 Adjustable Legs	Yes	Type	Electric / Gas
No. of Options	Normal, AI Dry, Bedding, Delicates, Quick Dry, Timed Dry, Heavy Duty Downloaded	Remaining Time Display/ Status Indicator(s)	Yes	BTU	Elec : N/A / Gas : 20,000
	Temp., Dryness, Time More Time, Less time Damp Signal, Air Dry, Wrinkle Care, Energy Saver Control Lock(3sec) Wi-Fi(3sec) Remote Start(3sec) Signal(3sec)	SMART FEATURES (ThinQ® TECHNOLOGY)		OPTIONS	
Temperature Setting	Low/Med. Low/Normal/Med. High/High	Smart Diagnosis (v3.0)	Yes	LP Conversion Kit	383EEL3002R
		WiFi	Yes	Side Venting Kit	383EEL9001B
Drying Levels	Damp/Less /Normal/More /Very	NFC Tag On Technology	No	LIMITED WARRANTY	
		ThinQ Care	Yes	Parts & Labor	1 Year
Manual Dry Times	20/30/40//50/60min	ThinQ Up	Yes	Drum	3 Years
		Remote Start/Cycle Monitor	Yes	UPC CODES	
		Energy Monitoring	Yes	DLE8400BE (Matte Black)	95174075425
		Smart Pairing	Yes	DLE8400WE (Alpine White)	95174075449
		ENERGY		DLG8401BE (Matte Black)	95174075432
		ENERGY STAR® Certified	Yes	DLG8401WE (Alpine White)	95174075456
		CEF	Elec: 3.94 / Gas: 3.49		

DIMENSION / CLEARANCES

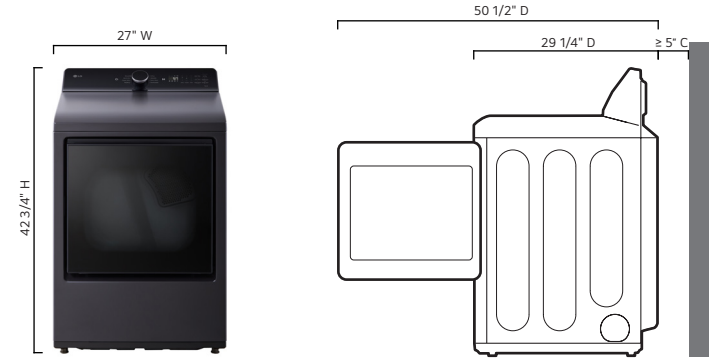

DIMENSIONS	
Product (WxHxD)	27" x 42 3/4" x 29 1/4"
Depth with Door Open	50 1/2" D
Carton Dimensions (WxHxD)	29 1/8" x 45 1/2" x 31 1/2"
Product Weight (lbs.)	Electric: 116.8/ Gas: 121.3
Carton Weight (lbs.)	Electric: 123.5 / Gas: 125.6

DIMENSION / CLEARANCES


**CLOSET VENTILATION REQUIREMENTS**

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm<sup>2</sup>) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm<sup>2</sup>) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET AND CLEARANCES WITH OPTIONAL PEDESTAL BASE

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

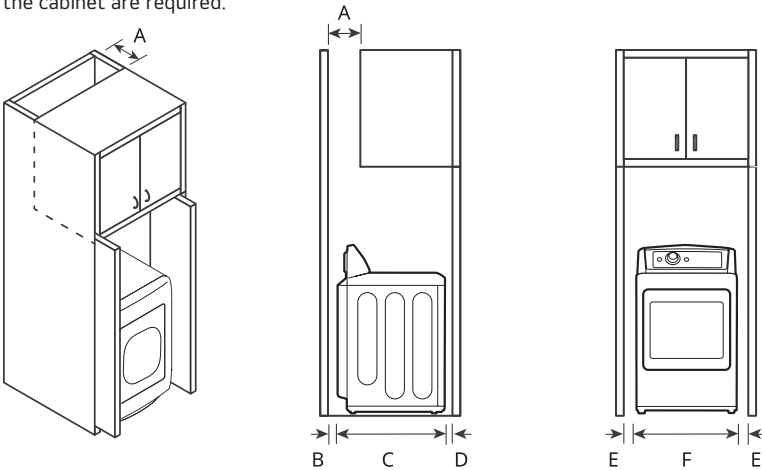


DIMENSIONS	
A Depth of Ventilation Opening	≥ 7" (178mm)
B Back Clearance	≥ 5" (127mm)
C Depth	29 1/4" (743mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (686 mm)

DIMENSION / CLEARANCES

SPACING FOR RECESSED AREA OR CLOSET INSTALLATION

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

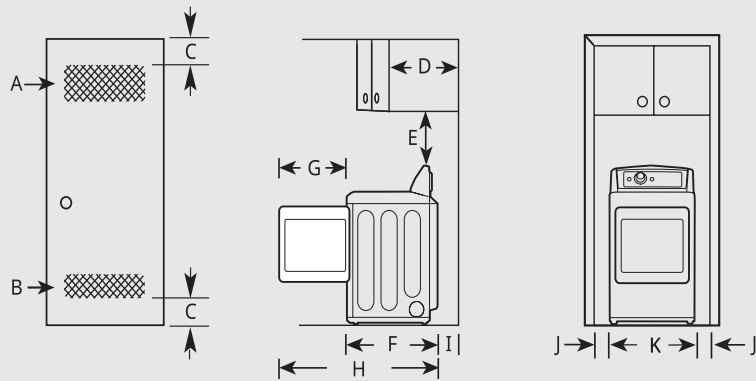

DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm <sup>2</sup> )
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm <sup>2</sup> )
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Depth	32 1/4" (820 mm)
G Length of Door Swing	22" (558 mm)
H Maximum Depth with Door Open	50 1/2" (1284 mm)
I Back Clearance	≥ 5" (127 mm)
J Side Clearance	≥ 1" (25 mm)
K Width	27" (686 mm)

LEVELING THE APPLIANCE

CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

- 1 Level
- 2 Level Feet

