

## 23 cu. ft. Counter Depth InstaView™ Side-By-Side Refrigerator



- Counter Depth
- 23 cu. ft. Capacity
- Edge-to-Edge InstaView®
- Dual Ice Maker with Craft Ice™
- UVnano™ Smooth Touch Dispenser
- Linear Cooling™
- CoolGuard™ Interior Panel
- Door Cooling+
- SpacePlus® Ice System
- Interior LED Lighting
- Flat Panel Door Design with Pocket Handles
- LG ThinQ® Technology (Wi-Fi)



### COLOR AVAILABILITY

- LRSOC2306S – Stainless Steel
- LRSOC2306D – Black Stainless Steel

### CAPACITY

Refrigerator (cu. ft.)	14.76
Freezer (cu. ft.)	7.74
Total Capacity (cu. ft.)	23

### ENERGY

Energy Consumption (kWh/Year)	645
ENERGY STAR® Qualified	Yes

### WATER & ICE SYSTEM

Ice & Water Dispenser	Yes
Dispenser Type	UVnano™ Smooth Touch Integrated Ice & Water Dispenser
Dual Ice Maker	Yes, with Craft Ice™
Ice System	SpacePlus®
Daily Ice Production	2.3 lbs.
IcePlus™ Production	3.0 lbs.
Craft Ice™ Daily Ice Production	0.8 lbs.
Ice Storage Capacity	3.5 lbs.
Dispenser Light	Yes
Water Filter	LT1000P

### COOLING

Compressor Type	Linear Compressor
Dual Evaporators	No
Linear Cooling™	Yes
Multi-Air Flow™ System	Yes
Door Cooling+	Yes
Temperature Sensors	4

### CONVENIENCE

Display Type	Smooth Touch Control / White LED
Temperature Controls	Electronic / Digital
Door Alarm	Yes
Child Lock	Yes
Auto Closing Door Hinge	Yes
ADA Compliant	Yes
Sabbath Mode	Yes
LoDecibel™ Quiet Operation	Yes

### REFRIGERATOR

No. of Shelves	4
Shelf Construction	Tempered Glass
Crisper Bins	2
CoolGuard™	Yes
Refrigerator Light	Ceiling LED

### REFRIGERATOR DOOR

Edge-to-Edge InstaView™	Yes
InstaView™ Door-in-Door®	No
Door-In-Door®	No
No. of Door Bins	4
Door Bin Construction	1 Piece (Clear)

### FREEZER

Freezer Drawers	2
No. of Shelves	4 Glass
No. of Door Bins	2
Freezer Light	Ceiling LED
Freezer Handle	Pocket Handle

## SMART FEATURES

Wi-Fi Enabled	Yes
ThinQ®	Yes
Proactive Customer Care	Yes
Voice Control	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes
Remote Monitoring	Yes

## MATERIALS AND FINISHES

Hidden Hinges	Yes
Surface	Smooth, Flat
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Pocket Handles

## ACCESSORIES

Replacement Water Filter	LT1000P
--------------------------	---------

## TECHNICAL SPECS

Required Power Supply	115 V, 60 Hz, 15 Amp
Plug Type	3-Prong
Power Cord Location	Top
Min. / Max. Water Pressure	20 - 120 psi

## DIMENSIONS / CLEARANCES / WEIGHTS

Depth with Handles	28 7/8"
Depth without Handles	28 7/8"
Depth without Door	24 3/8"
Depth (Total with Door Open)	46 1/2"
Height to Top of Case	68 7/8"
Height to Top of Door Hinge	70 1/2"
Width	35 7/8"
Width (Door Open 90° with Handle)	38 7/8"
Width (Door Open 90° without Handle)	38 7/8"
Door Edge Clearance with Handle	3/8"
Door Edge Clearance without Handle	3/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Approx. Weight (Product / Carton)	263.8 lbs. / 276 lbs.
Carton Dimensions (WxHxD)	37 9/16" x 74 5/8" x 30 3/8"



## LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear/Inverter Compressor (Parts Only)	10 Years



\*System tested and certified by NSF® International against NSF/ANSI Standard 42, Standard 53 and Standard 401.

## DIMENSIONS / CLEARANCES

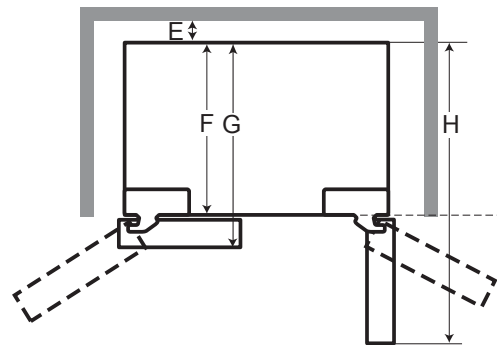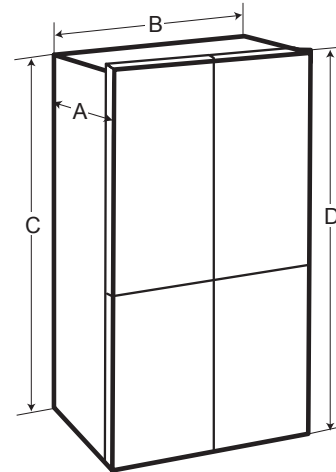

## DIMENSIONS / CLEARANCES

A	Depth	28 7/8" (735 mm)
B	Width	35 7/8" (912 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/2" (1790 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	24 3/8" (620 mm)
G	Depth with Door	24 3/8" (735 mm)
H	Depth (Total with Door Open 90°)	46 1/2" (1180 mm)

## INSTALLATION NOTES

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.