

HOME SOLUTIONS - LAUNDRY

DLE8480LE / DLG8481LE



7.3 cu. ft. Rear Control Dryer with LG EasyLoad™ Door and AI Sensing

7.3 cu. ft. Ultra Large Capacity

EasyLoad™ Door

Built-In Intelligence: AI Sensor Dry™ / Smart Pairing™

Electronic Control Panel with LED Display

FlowSense® Duct Clogging & Lint Filter Indicators

Aluminized Alloy Steel Drum

LoDecibel® Quiet Operation

Reversible Door

Wrinkle Care Option

AVAILABLE COLORS



LG ThinQ®


Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



SUMMARY		FABRIC CARE FEATURES		MATERIALS AND FINISHES	
Type	Rear Control Top Load Dryer	AI Sensor Dry	Yes	Aluminized Alloy Steel Drum	Yes
Vent Type	Vented	Precise Temperature Control with Variable Heater	Yes	NeveRust® Stainless Steel Drum	No
Dryer Type	Electric / Gas	Steam	No	Drum Rear	Painted Steel
Capacity	7.3 cu. ft.	CONVENIENCE FEATURES		Cabinet	Painted Steel
Matching Washer	WT8480CL	3 Minute Installation Check	Yes	Door / Trim	Glass / Black
Sensor Dry	Yes	LoDecibel® Quiet Operation	Yes	Top Cover Material	Steel
Steam	No	End of Cycle Signal	Yes	All Available Colors	Platinum Black (L)
Color	Platinum Black (L)	Drum Light (Door open)	Yes	POWER SOURCE	
APPEARANCE		Reversible Door	Yes	Ratings	CSA Listed
EasyLoad® Door	Yes	FlowSense® Duct Clogging Indicator	Yes	Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Control & Display	Electronic Control Panel with LED Display	Wrinkle Care Option	Yes	Plug	Elec: Not Included Gas: Included
Dial-A-Cycle®	Yes	Control Lock	Yes	Plug Type	Elec: 4-Wire or 3-Wire (Homes built after 1996 require 4-Wire) Gas: 3 Prong
DRYER PROGRAMS		Venting Option	Yes		Type
No. of Programs	8	4 Adjustable Legs	Yes	BTU	Electric / Gas
No. of Options	Normal, AI Dry, Bedding, Delicates, Quick Dry, Timed Dry, Heavy Duty, Downloaded	Remaining Time Display/ Status Indicator(s)	Yes	OPTIONS	
	Temp., Dryness, Time, More Time, Less time, Damp Signal, Air Dry, Wrinkle Care, Energy Saver, Control Lock(3sec), Wi-Fi(3sec), Remote Start(3sec), Signal(3sec)	SMART FEATURES (ThinQ® TECHNOLOGY)		LP Conversion Kit	383EEL3002R
Temperature Setting	Low/Med. Low/Normal/Med. High/High	Smart Diagnosis (v3.0)	Yes	Side Venting Kit	383EEL9001B
	Damp/Less /Normal/More /Very	WiFi	Yes	LIMITED WARRANTY	
Drying Levels	Manual Dry Times	NFC Tag On Technology	No	Parts & Labor	1 Year
Manual Dry Times	20/30/40/50/60min	ThinQ Care	Yes	Drum	3 Years
		ThinQ Up	Yes	UPC CODES	
		Remote Start/Cycle Monitor	Yes	DLE8480LE (Platinum Black)	195174075401
		Energy Monitoring	Yes	DLG8481LE (Platinum Black)	195174075418
		Smart Pairing	Yes		
		ENERGY			
		ENERGY STAR® Certified	Yes		
		CEF	Elec: 3.94 / Gas: 3.49		

DIMENSION / CLEARANCES

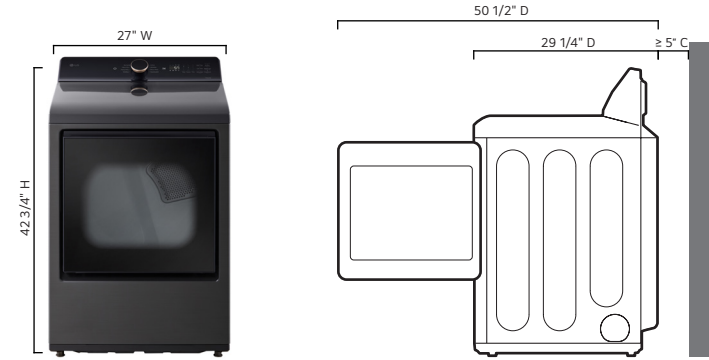

DIMENSIONS	
Product (WxHxD)	27" x 42 3/4" x 29 1/4"
Depth with Door Open	50 1/2" D
Carton Dimensions (WxHxD)	29 1/8" x 45 1/2" x 31 1/2"
Product Weight (lbs.)	Electric: 116.8/ Gas: 121.3
Carton Weight (lbs.)	Electric: 123.5 / Gas: 125.6

DIMENSION / CLEARANCES


**CLOSET VENTILATION REQUIREMENTS**

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm<sup>2</sup>) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm<sup>2</sup>) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET AND CLEARANCES WITH OPTIONAL PEDESTAL BASE

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

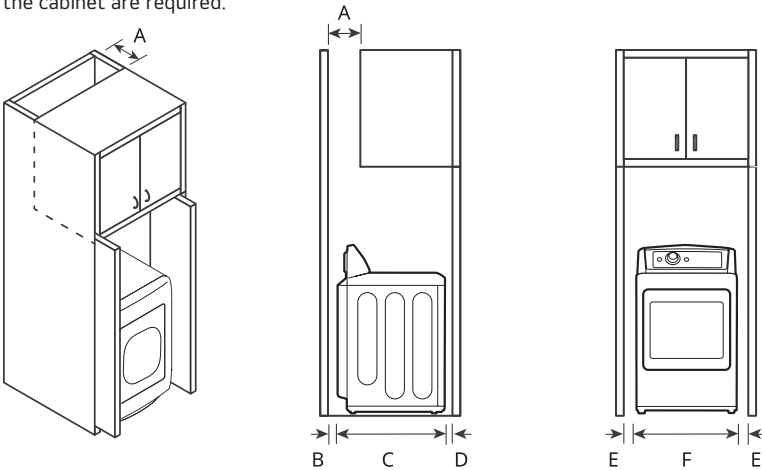


DIMENSIONS	
A Depth of Ventilation Opening	≥ 7" (178mm)
B Back Clearance	≥ 5" (127mm)
C Depth	29 1/4" (743mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (686 mm)

DIMENSION / CLEARANCES

**SPACING FOR RECESSED AREA OR CLOSET INSTALLATION**

These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

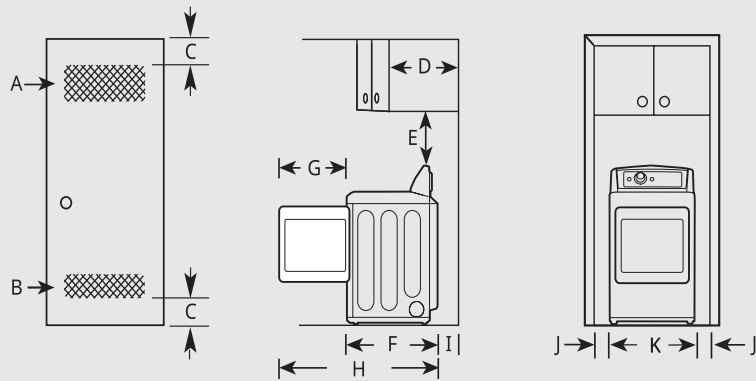

DIMENSIONS	
A Upper Ventilation Opening	≥ 48 sq. in. (310 cm <sup>2</sup> )
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm <sup>2</sup> )
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Depth	29 1/4" (743 mm)
G Length of Door Swing	22" (558 mm)
H Maximum Depth with Door Open	50 1/2" (1284 mm)
I Back Clearance	≥ 5" (127 mm)
J Side Clearance	≥ 1" (25 mm)
K Width	27" (686 mm)

LEVELING THE APPLIANCE

CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

- 1 Level
- 2 Level Feet

