

JVX5300EJ/SJ/BJ

GE® 30" Under the Cabinet Hood

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

WB02X11537 replacement grease filter and JXCF55 replacement charcoal filter are available for additional cost. Call toll-free 800.626.2000.

Installation Information: Before installing, consult installation instructions, packed with product, for current dimensional data.



Additional accessories:

JXS50SS 15" cabinet spacer

UXRC70 remote control

JXDA22 optional damper

AMP RATING	
120V	2.5

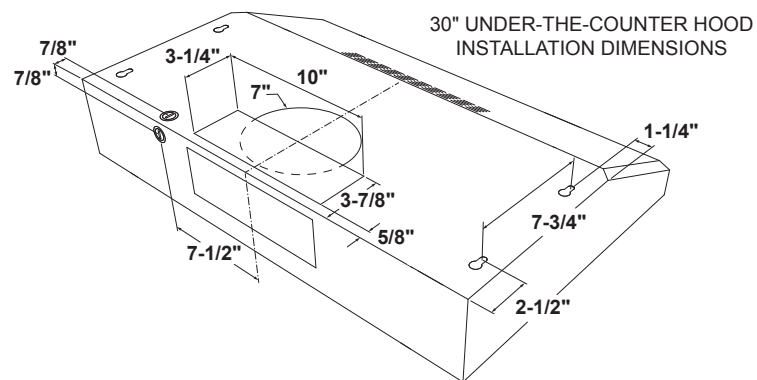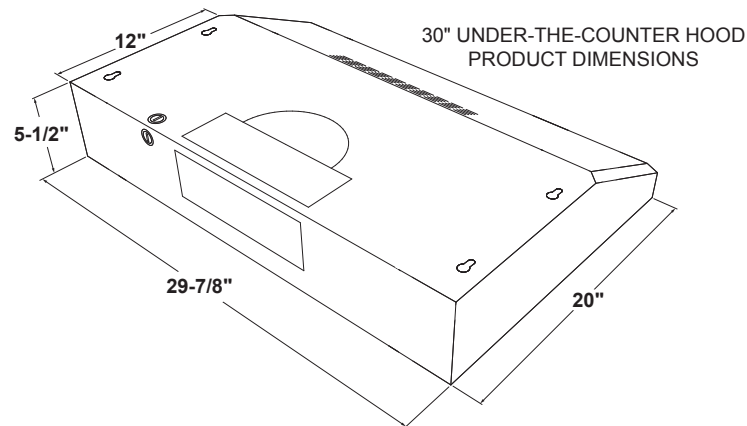

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.




Specification Revised 6/20

JVX5300EJ/SJ/BJ

GE® 30" Under the Cabinet Hood

FEATURES AND BENEFITS

- Easy installation – 10 minutes or less by one person
 - Four-speed with boost, 310 CFM venting system – Removes smoke, grease, odors and moisture
 - Electronic backlit controls – Add a sophisticated look with this up-front, easy-to-use display
 - Dual halogen lighting with nightlight – Enjoy better visibility with a brightly lit cooktop and surrounding surface
 - Auto-off – Set the vent hood to automatically shut off after 15 minutes
 - Convertible venting options – Select recirculating or external venting
 - Vertical and rear exhaust – Exhausts from the top or rear of the hood
 - Appearance (Fully enclosed bottom) – Enjoy a sleek appearance from every angle
 - Optional remote control – Control your ventilation lighting and fan speed from anywhere in the kitchen
- Model JVX5300SJSS – Stainless steel
- Model JVX5300EJES – Slate
- Model JVX5300BJTS – Black Stainless

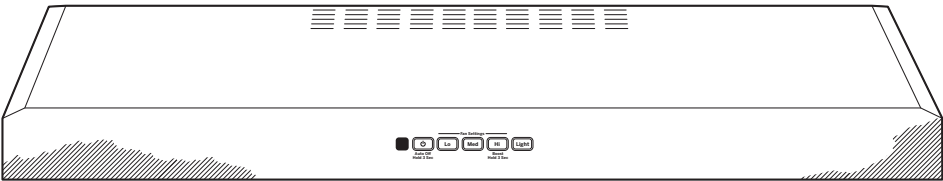

CFM/SONES RATINGS	
Exhaust Boost Speed (BS)	310/7.0
Exhaust High Speed (HS)	260/5.5
Exhaust Medium Speed (MS)	170/3.0
Exhaust Low Speed (LS)	60/1.0

