

**Glass Door SKU: ARG6PV - Solid Door SKU: ARS6PV****6 Cu.Ft. ADA Height Vaccine Refrigerator****32.5" H x 23.38" W x 24.38" D (H x W x D) • 6 cu.ft. (170L)**

Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines, with antimicrobial handle

**Advanced Temperature Control**

- Intelligent microprocessor digital temperature controller
- Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor reads interior air temperature for superior temperature control
- Adjustable operating control range from +2°C to +8°C (+35.6°F to +46.4°F)
- Digital display of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
- Password protection of control parameters beyond setpoint
- Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading

**Fully Featured Interior for Convenient Storage**

- Energy efficient LED lighting with internal on/off switch
- Adjustable plastic-coated wire shelves for improved circulation
- Multiple shelf positions spaced at ½" to allow flexible adjusting to support smaller items
- Adjustable cycle defrost operation
- ½" probe port included to accept user-provided monitoring equipment

**Multiple Alarms for Safer Monitoring**

- Audible/visual alarms for high/low temperature excursions
- Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure and sensor failure alarms
- Mute function for alarms
- Remote alarm contacts in rear of the unit

**Quality Design for Reliable Performance**

- Hospital grade cord with a green dot plug
- Powder-coated handle with naturally occurring silver ions to reduce the spread of germs
- Self-closing door offers added storage protection
- User-reversible door swing (self-closing function compatible with RHD position only)
- Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP requirements
- Convenient security with a top-mounted door lock (2 keys included)
- Magnetic gaskets to ensure a positive seal
- Pyxis®, Omnicell® and AcuDose RX® compatible

**EXTENDED WARRANTY**

- 2-year parts & labor
- 5-year compressor

**ADA OPTIONS**

32" high choices  
for use under lower  
ADA compliant counters

**ECO-FRIENDLY**

Uses environmentally  
friendly hydrocarbons  
for a greener footprint

**NEW OPTIONS**

Keyless locks, interior  
lockers, & full-extension  
drawers now available

# ARS6PV Specifications

## Overview


<b>Height of Cabinet</b>	32.5" (83 cm)
<b>Width</b>	23.38" (59 cm)
<b>Width with Door Open</b>	23.88" (61 cm)
<b>Depth</b>	24.38" (62 cm)
<b>Depth with Handle</b>	26.13" (66 cm)
<b>Depth with door at 90°</b>	46.5" (118 cm)
<b>Capacity</b>	6.0 cu.ft. (170 L)
<b>Defrost Type</b>	Automatic
<b>Door (ARS6PV)</b>	White
<b>Door (ARG6PV)</b>	Glass
<b>Cabinet</b>	White
<b>US Electrical Safety</b>	ETL
<b>Canadian Electrical Safety</b>	ETL-C
<b>Amps</b>	0.75
<b>Voltage/Frequency</b>	115 V AC/60 Hz
<b>Weight</b>	115.0 lbs. (52 kg)
<b>Parts &amp; Labor Warranty</b>	2 Years
<b>Compressor Warranty</b>	5 Years
<b>UPC</b>	761101062556

## Refrigerator Features


<b>Door Swing</b>	RHD
<b>Reversible</b>	Yes
<b>Shelf Type</b>	Wire
<b>Shelf Qty</b>	4
<b>Adjustable Shelves</b>	Yes
<b>Thermostat Type</b>	Digital
<b>Fan Type</b>	Interior
<b>Refrigerant Type</b>	R600a
<b>Refrigerant Amount</b>	1.66 oz.
<b>Interior Light</b>	Yes
<b>Temperature Range</b>	2 to 8°C
<b>Sound Level</b>	36.4 dB

## Interior


<b>Interior Height</b>	24.5" (62 cm)
<b>Interior Width</b>	20.0" (51 cm)
<b>Interior Depth</b>	17.0" (43 cm)
<b>Compressor Step Height</b>	6.5" (17 cm)
<b>Compressor Step Width</b>	20.0" (51 cm)
<b>Compressor Step Depth</b>	5.0" (13 cm)

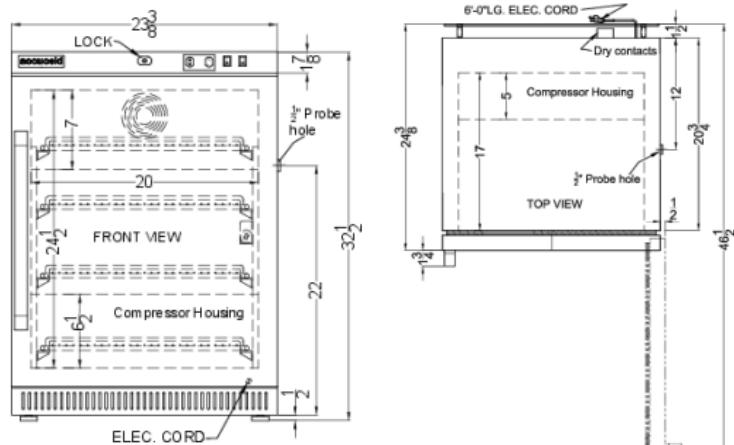

## Advanced Temperature Control

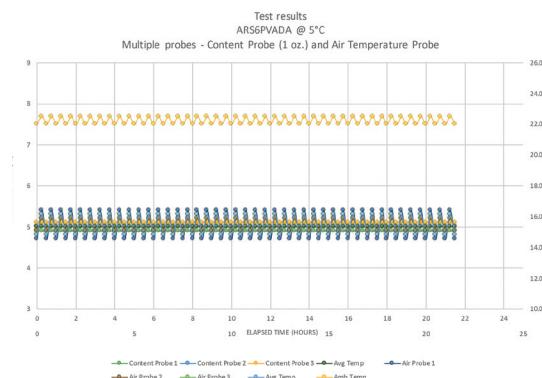

## Whisper Quiet Performance




## Popular Options & Support

- **NSF/ANSI 456** Certification
- **NIST** Calibrated DDL
- **Keyless** Entry Locks
- **Internal** Lockers or Drawers
- **Preventative** Maintenance

Call 888.4.MEDLAB for more information

## Energy Conservation



**accucold**

ACCU COLD DIVISION FELIX STORCH, INC. ISO 9001:2015 CERTIFIED

770 Garrison Avenue, Bronx, NY 10474 USA • TEL 718.893.3900 • FAX 844.478.8799 • info@accucold.com • accucold.com