HWC515 • 15" Wine Refrigerator • 5 Class

U-LINE

Stainless Frame   Integrated Frame   Integrated Solid

Additional Options

- Accessory panels are designed for easy installation on Integrated models
- Stainless lock model available

Stainless Handleless Panel

Stainless Lock Model

Key Features

- *Industry Exclusive:* **Full-depth lower interior maximizes storage options**
- *Industry Leading:* **Variable speed compressor delivers maximum energy efficiency, faster temperature response, and quieter operation**
- Stainless steel interior
- Stainless steel cabinet, toe kick, and accents
- U-Adjust® Interior: 19 adjustable positions
- Seven removable, full-extension wine racks
- Wine racks accommodate a variety of bottle shapes and sizes and can be configured to store champagne and magnum bottles
- Convection cooling system provides a quick cool down and consistent temperature
- Temperature range: 33°F - 70°F

- Adjustable bright white or blue LED lighting
- Soft close door with articulating hinge
- Volume of 2.9 cu ft holds up to 28 wine bottles (750 ml)
- Digital touch pad control with blue LED display
- Stainless steel handle (⅞" diameter)
- Integrated model requires ¾" custom door panel and handle (not supplied by U-Line)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
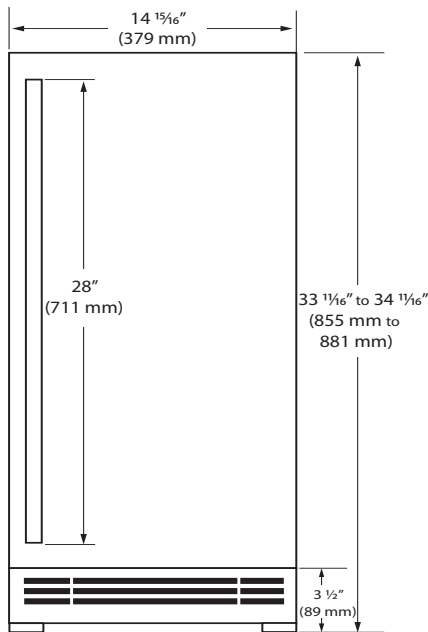- Four adjustable leveling legs

Model Details

Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHWC515-SG01A	115 / 60	Field Reversible	Stainless Frame	105 lb
UHWC515-SG41A	115 / 60	Right-Hand Hinged	Stainless Frame (with lock)	105 lb
UHWC515-SG51A	115 / 60	Left-Hand Hinged	Stainless Frame (with lock)	105 lb
UHWC515-IG01A	115 / 60	Field Reversible	Integrated Frame	103 lb
UHWC515-IS01A	115 / 60	Field Reversible	Integrated Solid	88 lb

Accessories

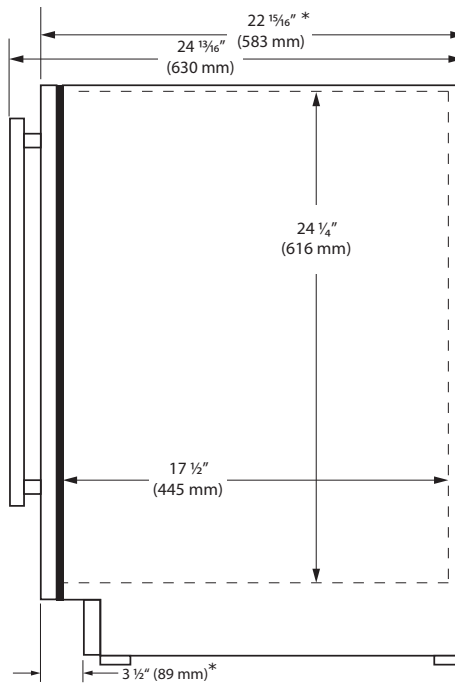| Model	Description	Finish	Shipping Weight
ULAGRILLE15	Adjustable Grille (Accepts Integrated Panel)	Black	1.5 lb
ULASHP15FRAME*	Stainless Handleless Panel Frame	Stainless	5 lb
ULASHP15SOLID*	Stainless Handleless Panel Solid	Stainless	6 lb

Front

14 ¹⁵/₁₆" (379 mm)

28" (711 mm)

33 ¹¹/₁₆" to 34 ¹¹/₁₆" (855 mm to 881 mm)

3 ½" (89 mm)

Side

*Add ¹/₂" for Integrated models with ³/₄" integrated panel installed.

22 ¹⁵/₁₆" * (583 mm)

24 ¹³/₁₆" (630 mm)

24 ¼" (616 mm)

17 ½" (445 mm)

3 ½" (89 mm)*

Top

10 ⁵/₈" (271 mm)

21 ¹/₁₆" (535 mm)

1 ⅞" (48 mm)

17 ½" (445 mm)
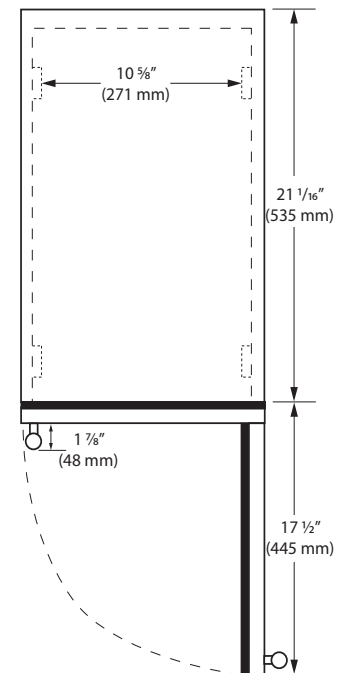
Specifications

Model	HWC515
Amps: Running	1.2
Capacity: Bottle (12 oz)	N/A
Capacity: Can (12 oz)	N/A
Capacity: Volume (cu ft)	2.9
Capacity: Wine Bottle (750 ml)	28
Dimensions: Product Depth	22 ¹⁵/₁₆" / 583 mm
Dimensions: Product Height (Min.)	33 ¹¹/₁₆" / 855 mm
Dimensions: Product Width	14 ¹⁵/₁₆" / 379 mm
Energy Consumption: Avg. Per Year	255 - 285 kWh
ENERGY STAR (glass door)	No
ENERGY STAR (solid door)	Yes
Panel Height	30" / 762 mm
Panel Thickness	¾" / 20 mm
Panel Type	2 ¾" / 70 mm Frame Panel or Solid Panel
Panel Width	14 ¹⁵/₁₆" / 379 mm
Product Weight: Max	105 lb
Refrigerant Type:	R600a (1.06 oz)
Sabbath (Star K Certified)	Yes
Temperature Range	33˚F - 70˚F

Back

7 ⅜" (187 mm)

Power Cord 6 ft (183 cm)

1 ⅜" (35 mm)

Cabinet Cut-Out

Preferred location for electrical outlet is in an adjacent cabinet.

33 ⁷/₈" (860 mm) to 34 ⁷/₈" (886 mm)

24" (610 mm)

⁵/₈" (16 mm)

7" (178 mm)

4" (102 mm)

15 ³/₁₆" (386 mm)
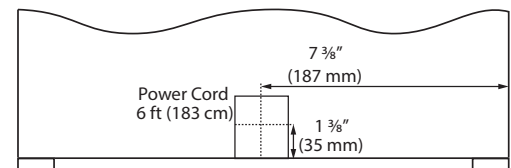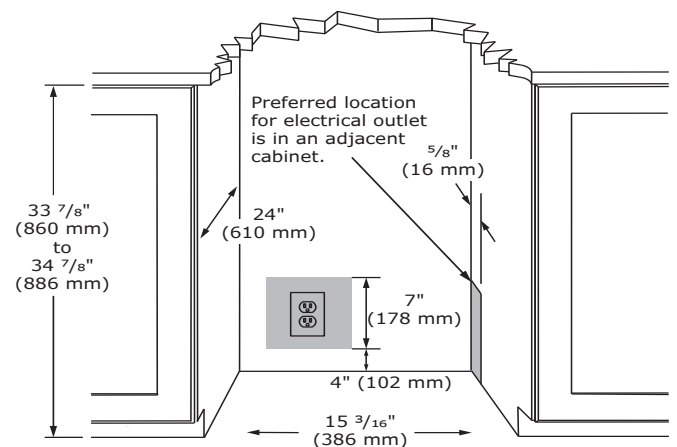
Installation Notes

- 15" Cutout width may be sufficient if opening is exact and square

- No additional clearance is needed for ventilation

- Do not obstruct front grille air flow

Warranty

- 2 Year (parts & labor) / 5 year sealed system (parts)

+ Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details

3 year warranty available at no cost

Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.

8900 North 55th Street • Milwaukee, Wisconsin 53223 USA • +1.414.354.0300 • sales@u-line.com • u-line.com