FRIGIDAIRE.



4.7 Cu. Ft. I.E.C Top Load Washer

Top Load Washer

Available Products: FLVW7000AW

Available Colors: White

Version: 10/25

Product Specifications

Washer		Washer Cycles	
Agitator	Yes	Cycle Count	8
Drum Material	Stainless Steel	Bulky	Yes
Maximum Spin Speed	710 RPM	Clean Washer	Yes
Water Level Adjustment	Yes	Delicates	Yes
		Fast Wash	Yes
Washer Options		Heavy	Yes
Chime	Yes	Normal	Yes
Extended Spin	Yes	Rinse and Spin	Yes
Extra Rinse	Yes	Whites	Yes
Fabric Softener	Yes		
		Soil Levels	
Temperature Settings		Light	Yes
Cold	Yes	Normal	Yes
Tap Cold	Yes	Heavy	Yes
Warm	Yes	Extra Heavy	Yes
Hot	Yes		
		Controls	
Dispenser		Child Lock	Yes
Bleach Dispenser	Yes	Cycle Status Lights	Yes
Detergent Dispenser	Yes	Pause Function	Yes
Fabric Softener Dispenser	Yes	Power On/Off	Yes
rubile bolteller bispeliser	103	Start	Yes
Dimensions and Volume			
Height	43 1/2"	Electrical Specifications	
Height With Lid 90° Open	58"	Minimum Circuit Required	10 Amps
Width	25 3/4"	Voltage Rating	120 V
Depth	27"		
Washer Drum Capacity I.E.C.	4.7 Cu. Ft.	General Specifications	
washer Drain Capacity 1.E.C.	4.7 Gu. 1 t.	Chime On / Chime Off	Yes
Energy Data		Leveling Legs	Yes
Integrated Modified Energy Factor	1.57	Prop 65 Label	Yes
Integrated Modified Energy Factor Integrated Water Factor	6.5	Warranty - Labor	1 Year
kWh/year	120 kWh	Warranty - Parts	1 Year
kwn/year Water Usage/Year	7862 Gallons	Training 1 and	1 ICui
water Osage/ fedi	/002 Gallons	Right to Repair Details	
		Right to Repair Details	Available - Visit
Safety Certifications and Approvals			Available - Visit frigidaire.ca/right-to
UL Listed	Yes	Right to Repair	repair for more
			information

Available Products: FLVW7000AW Available Colors: White

Version: 10/25

Installation Diagram


Clearance requirements


■ IMPORTANT

DO NOT INSTALL YOUR WASHER:


- 1 In an area exposed to dripping water or outside weather conditions. The ambient temperature should never be below 60° F (15.6° C) to maximize detergent effectiveness.
- 2 In an area (garage or garage-type building) where gasoline or other flammables (including automobiles) are kept or stored.
- 3 On carpet. Floor MUST be solid with a maximum slope of 1 inch (2.5 cm). To minimize vibration or movement, reinforcement of the floor may be necessary.

MINIMUM INSTALLATION CLEARANCES - Inches (cm)						
	SIDES	REAR	TOP	FRONT		
Alcove	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	n/a		
Closet	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	2" (5.1 cm)		





Washer Dimensions

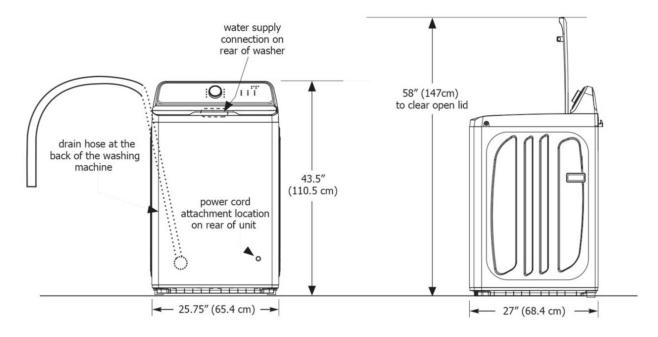

¹Drain hose length on washer approximately 66.93 inches (170 cm).

²Power supply cord length approximately 72.8 inches (185 cm).