

JVX3300SJ

GE® 30" Under-the-Cabinet Hood

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

WB02X11537 replacement grease filter and JXCF53 replacement charcoal filter are available at additional cost. Call toll-free 800.626.2000.



INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

ADDITIONAL ACCESSORY:

JXS50SS 15" cabinet spacer

AMP RATING

120V	2.5
------	-----

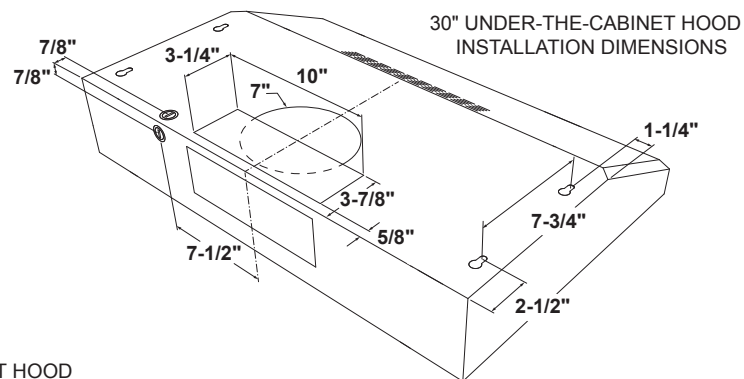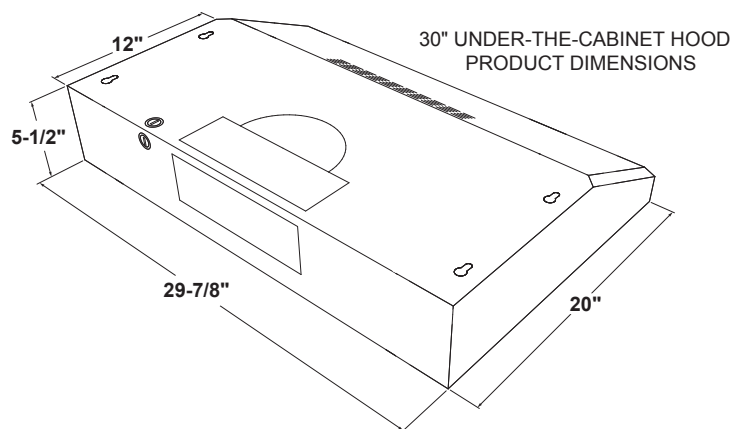

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



Specification Revised 10/25


JVX3300SJ

GE® 30" Under-the-Cabinet Hood

FEATURES AND BENEFITS

- Easy installation – 10 minutes or less by one person
- Two-speed, 200 CFM venting system – Removes smoke, grease, odors and moisture
- Front controls – Enjoy easy access and a subtle appearance
- Cooktop lighting - Illuminate cooking space and surrounding surface
- Convertible venting options – Select recirculating or external venting
- Vertical and rear exhaust – Exhausts from the top or rear of the hood
- Appearance (Partially enclosed bottom) – Enjoy easy access to hood interior
- Dishwasher-safe filter – Filters grease and is dishwasher-safe
- Wall Switch Option — Convertible for wall switch use and ADA-compliant operation

Model JVX3300SJSS – Stainless steel

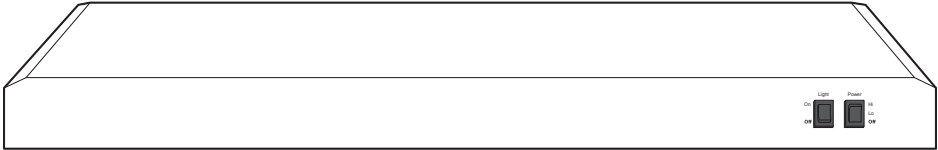

CFM/SONES RATINGS	
Exhaust High Speed (HS)	200/6.5
Exhaust Low Speed (LS)	130/5.0



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.