

SIZE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30 in.	ALT430SS	HPFA52 (Type "H2")	HPF52 (Type "Xh2")
36 in.	ALT436SS	HPFA52 (Type "H2")	HPF52 (Type "Xh2")

Duct Orientation	Size	Damper	Sones			CFM			
			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.
Vertical - Rectangular	3¼ in. x 10 in.	Included	<0.3	3.0	7.0	110	270	340	380
Horizontal - Rectangular	3¼ in. x 10 in.	Included	<0.3	3.0	7.0	110	280	380	430
Vertical - Rectangular	3¼ in. x 14 in.	Included	<0.3	3.0	7.0	120	280	370	420
Horizontal - Rectangular	3¼ in. x 14 in.	Included	<0.3	3.0	7.0	110	290	430	480
Round - Vertical	7 in.	Sold Separately	<0.3	3.0	7.0	120	270	350	390


FEATURES	
Control type	3-Speed Infrared
Delay off	yes
Filter Clean Reminder	yes
Heat Sentry™	yes
ADA Capable	yes
Lighting	3-level LED (included)
Grease Filters	Peripheral
Installation Hardware	EZ1 Bracket
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately

120 V, 60 Hz - 1.9 AMPS

7-in. Round Damper	BP87Q
ADA Wiring Kit	HAWRK3
Make-up Air Damper	MD6TU, MD8TU, or MD10TU
Remote Control	HCR3

24 in. to 30 in. from cooktop to bottom of hood

1-year
3-year (LED modules only)
(See installation manual for full warranty text.)

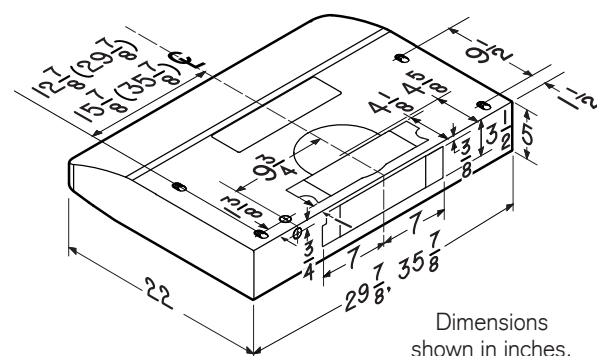

Dimensions
shown in inches.

* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

99046188D
800-558-1711