JVX3300DJ

GE 30" Under-the-Cabinet Hood

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


WB02X11537 replacement grease filter and JXCF53 replacement charcoal filter are available at additional cost. Call toll-free 800.626.2000.


INSTALLATION INFORMATION: Before installing, consult installation instructions, packed with product, for current dimensional data.

ADDITIONAL ACCESSORY:

JXS50SS 15" cabinet spacer

AMP RATING		
120V	2.5	

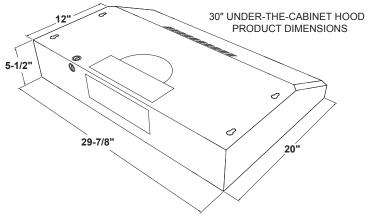

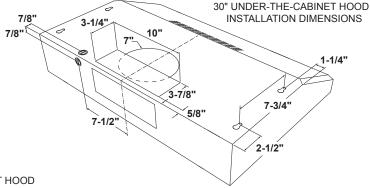

Exhaust outlet connects to 3-1/4" x 10" rectangular duct. Vent top or rear. Includes rectangular damper.



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.









JVX3300DJ

GE 30" Under the Cabinet Hood

FEATURES AND BENEFITS

Easy installation – 10 minutes or less by one person

Two-speed, 200 CFM venting system – Removes smoke, grease, odors and moisture

Front controls – Enjoy easy access and a subtle appearance

Cooktop lighting – Illuminate cooking space and surrounding surface

Convertible venting options – Select recirculating or external venting

Vertical and rear exhaust – Exhausts from the top or rear of the hood

Appearance (Partially enclosed bottom) – Enjoy easy access to hood interior

Dishwasher-safe filter – Filters grease and is dishwasher-safe

 $Wall \ Switch \ Option \ -- \ Convertible \ for \ wall \ switch \ use \ and \ ADA-compliant \ operation$

Model JVX3300DJWW - White on white

Model JVX3300DJBB – Black on black

	Con Light Proof Isl

CFM/SONES RATINGS		
Exhaust High Speed (HS)	200/6.5	
Exhaust Low Speed (LS)	130/5.0	



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.