## 6.3 cu. ft. Electric Slide-in Range

- Built-in Air Fry
- InstaView® Window
- ProBake® Convection
- EasyClean® + Self Clean
- Triple Element & Dual Element
- Slide-in Design
- 6.3 cu ft. Large Capacity
- Storage Drawer

COLOR AVAILABILITY

Door Lock

Type

Automatic Safety Shut-Off

DRAWER FEATURES

• LG ThinQ® Technology (Wi-Fi)









LSEL6335F – PrintProof™ Stainless Steel		
LSEL6335D – PrintProof™ Black Stainless Steel		
CAPACITY		
Oven Capacity	6.3 cu. ft.	
Drawer Capacity	0.8 cu. ft.	
OVEN FEATURES		
Convection System	ProBake® Convection	
Oven Cooking Modes		
Bake, Convection Bake, Convection Roast, Broil High, Broil Low, Warm, Proof, Frozen Meal, Air Fry, Slow Cook		
Infrared Heating <sup>™</sup> System	No	
Air Sous Vide	No	
Built-in Air Fry	Yes (Air Fry Tray Included)	
Temperature Probe	No	
Oven Racks	2 Heavy Duty	
Number of Rack Positions	7	
Broil Element	4,200W / 6 Pass	
Convection Element	2,500W	
Convection Conversion	Yes	
EasyClean®	Yes	
Self Clean	Yes	
GoCook Smart Oven Light	Yes (1)	

Yes


Storage

After 12 Hours

Radiant
5
Dual 9" / 6" – 3,200W / 1,400W (UltraHeat <sup>™</sup> )
6" / 1,200W
7" / 100W
Triple 12" / 9" / 6" – 3,000W / 2,200W / 1,100W
6" / 1,200W
Yes
Front Tilt-Control Knobs
SmoothTouch™ Glass
LED (White)
English
Yes
Yes
12 Hr or 24 Hr (Option)
°F or °C
High, Low, Off
Yes
Yes
Yes (Star-K-Certified)
Yes
Yes
Yes
Amazon Alexa, Google Assistant
Yes
Yes (Tovala, Innit, SideChef, Nestle and Kraft-Heinz)

FINISHES AND APPEARANCE	
Fingerprint & Smudge Resistant Exterior	Yes
Cooktop Finish	Black Ceramic Glass w/Gray Pattern
Handle / Knobs	F - Stainless Steel Appearance D - Black Stainless Steel Appearance
Oven Door Feature	InstaView <sup>®</sup> Window (WideView <sup>™</sup> )
TECHNICAL SPECS	
Required Power Supply	120 / 208-240 V, 60 Hz, 3-Wire or 4-Wire
Minimum Circuit Rating	40 Amp
kW Rating at 208V	9.8 kW
kW Rating at 240V	13.0 kW
Power Cord	Not Included
Electrical Receptacle	4-Wire (14-50R) / 3-Wire (10-50R)
Power Outlet Location	See Installation Diagram

INCLUDED ACCESSORIES		
2 Heavy Duty Racks, 1 Air Fry Tray, Rear Filler Kit, Cooktop Cleaner		
OPTIONAL ACCESSORIES		
Slide-in Range Filler Kit (Side Gaps)	LSFL301S	
Air Fry Rack	LRAL302S	
DIMENSIONS / CLEARANCES / WEIGHTS		
Product Dimensions (W x H x D w/Handle)	29 <sup>7</sup> / <sub>8</sub> " × 36 <sup>1</sup> / <sub>2</sub> " × 29 <sup>9</sup> / <sub>32</sub> "	
Product Height to Cooking Surface	36"	
Cutout Dimensions (W x H x D)	30" x 36" x 25"	
Carton Dimensions (W x H x D)	32 1/2" x 44" x 30 1/2"	
Approx. Weight (Product / Carton)	221 lbs. / 161.7 lbs	
LIMITED WARRANTY		
Parts and Labor	1 Year	

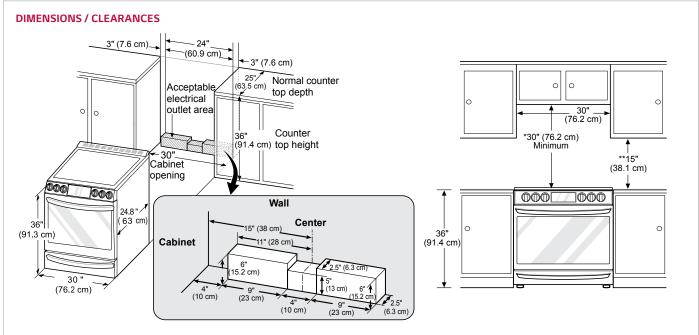

## MINIMUM DIMENSIONS

\*30" (76.2 cm) minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" (60.9 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (6.4 cm) flame retardant millboard covered with not less than no. 28 MSG sheet steel, 0.015" (0.381 mm) stainless steel, 0.024" (0.610 mm) aluminum or 0.020" (0.508 mm) copper.

<sup>\*\*15&</sup>quot; (38.1 cm) minimum between countertop and adjacent cabinet bottom.

## **DIMENSIONS / CLEARANCES**

DIM	ENSIONS / CLEARANCES	
Α	Width	29 <b>7</b> / <b>8</b> " (758.8 mm)
В	Height	36 1/2" (927.9 mm)
С	Depth (Includes Door Handle)	29 <b>9</b> / <b>32</b> " (743.9 mm)
D	Height (Excludes Vent Trim)	36" (913.0 mm)
E	Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 <b>3</b> / <b>4</b> " (629.4 mm)
F	Depth (Excludes Door Handle)	26 <b>7</b> / <b>8</b> " (683 mm)
G	Depth when drawer is fully opened	38 <b>7</b> / <sub>16</sub> " (976.7 mm) 36 <b>1</b> / <sub>16</sub> " (916.2 mm) (Excludes handle)
Н	Depth when door is fully opened	48 <b>5</b> / <b>8</b> " (1235.9 mm)