

## KMR 1356-3 G GD EDST/CLST

### RangeTop

with ?? burners and griddle for versatility and performance



- Professional design – 48 (1219) in (mm) wide in stainless steel with Clean Touch Steel™ finishing
- Direct control – metal knobs with light ring
- Easy cleaning – ComfortClean dishwasher-safe grates
- Broad performance spectrum – burner w. up to 19,500 BTU (5.7 kW)
- Convenient and safe – automatic re-ignition for all burners

EAN: 4002516495475 / Material number: 11852640 / Old Material Number: 26135670USA

Heating type	
Fuel type	Gas
Construction type	
Rangetop	•
Design	
Casing	Stainless steel
Front panel	CleanSteel
Genuine metal knobs	•
Cast iron pot rests (matte black enameled)	•
Ring features	
Number of gas burners	6
Number of griddle surfaces	1
1st cooking zone/cooking area	
Position	front left
Type	Ultra high-speed burner
Max. rating in W	5700
2nd cooking zone/cooking area	
Position	rear left
Type	High-speed burner
Max. rating in W	2900
3rd cooking zone/cooking area	
Position	left center
Type	Griddle surface
4th cooking zone/cooking area	
Position	Rear center right
Type	Ultra high-speed burner
Max. rating in W	4000
5th cooking zone/cooking area	
Position	rear right
Type	High-speed burner
Max. rating in W	2900
6th cooking zone/cooking area	
Position	front right
Type	Ultra high-speed burner
Max. rating in W	5700
7th cooking zone/cooking area	
Position	Center right front
Type	Ultra high-speed burner
Max. rating in W	5700
8th cooking zone/cooking area	
True Simmer function	•
Control panel	
Operation via genuine metal knobs with backlit	•
Cleaning convenience	
Dishwasher-safe trivets	•
Single-piece cooktop surround	•
Safety	
Automatic re-ignition	•
Technical data	
Dimensions (width) in in. (mm)	48 (1219)



KMR 1356-3 G GD EDST/CLST  
RangeTop  
with ?? burners and griddle for versatility and performance




EAN: 4002516495475 / Material number: 11852640 / Old Material Number: 26135670USA

Height in in. (mm)	7 5/8 (191)
Dimensions (depth) in in. (mm) with bullnose	27 1/4 (692)
Dimensions (depth) in in. (mm) without bullnose	25 5/8 (650)
Weight in lbs. (kg)	171 (78)
Total connected load in kW	34.00
Voltage in V	120
Fuse rating in A	10
Number of phases	1
Power cord length in in. (m)	3 (1.2)

## KMR 1356-3 G GD EDST/CLST

### RangeTop

with ?? burners and griddle for versatility and performance

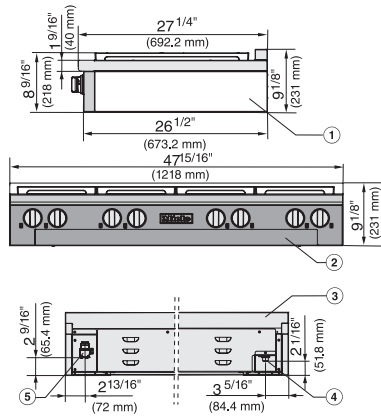

KMR1354 G/LP, KMR1355 G/LP, KMR1356 G/LP,  
KMR1354-3, KMR1355-3, KMR1356-3 (installation  
drawings)

1) Side view, 2) Front view, 3) Rear view, 4) Gas  
connection, 5) Electrical connection,