

- Improve the flow and function of your space by having refrigerated items where you need them most
- Solid door models
- Push carts directly into unit
- LED lighting



UCRE633-SS31A



UCRE666-SS71A

Model	Description	Voltage/Hz/Amps	Shipping Weight
UCRE633-SS31A	Roll-in Refrigerator with Single Solid Door	115v / 60hz / 9.6	441 lb
UCRE666-SS71A	Roll-in Refrigerator with Double Solid Door	115v / 60hz / 19.2	639 lb

Specifications

UCRE633-SS31A dimensions: 88 1/2" H x 33 7/8" W x 45 1/2" D

UCRE666-SS71A dimensions: 88 1/2" H x 66 7/8" W x 45 1/2" D

UCRE633-SS31A: Environmentally friendly R290 refrigerant - 3.5 oz

UCRE666-SS71A: Environmentally friendly R290 refrigerant - 7.0 oz

UCRE633-SS31A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-15P

UCRE666-SS71A: Factory pre-wired for dedicated outlet, 11 ft cord and plug included NEMA 5-20P

UCRE633-SS31A volume: 35.8 cu ft

UCRE666-SS31A volume: 79 cu ft

AISI 304 stainless steel interior and exterior with lock

Autodefrost

CFC-free high density polyurethane insulated cabinet

Electronic digital temperature control with alarms

Epoxy coated, sealed evaporator eliminates potential of corrosion

Fixed stainless steel loading ramp

High efficiency compressor, top mount

High efficiency evaporator coil & condenser


NSF/ANSI Standard 7 compliant

Temperature range: 28°F to 46°F




Product Specifications • Roll-In Refrigerators


Front UCRE633 (Open)

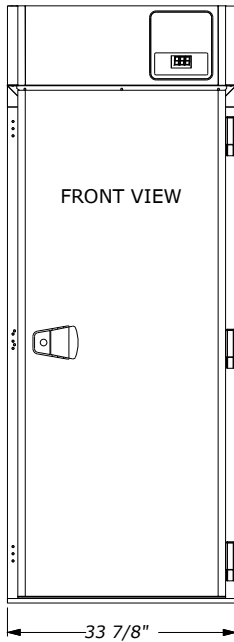


Front UCRE666 (Open)

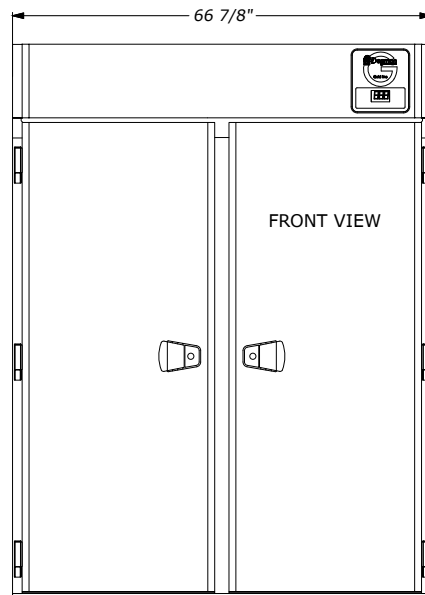


Side UCRE633/666

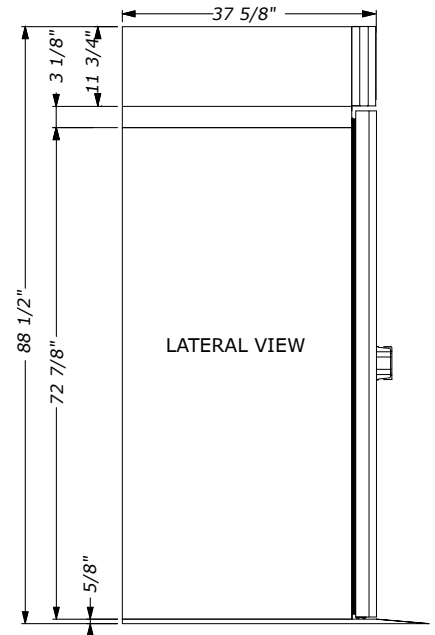




Top UCRE633



Top UCRE666

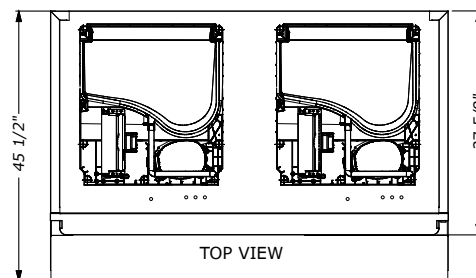

Back UCRE633/666

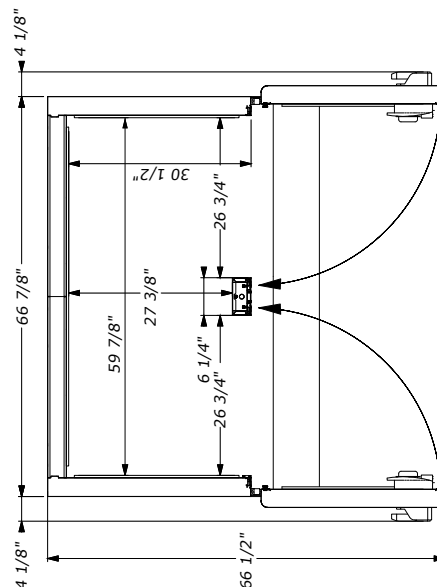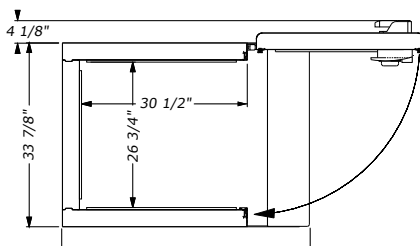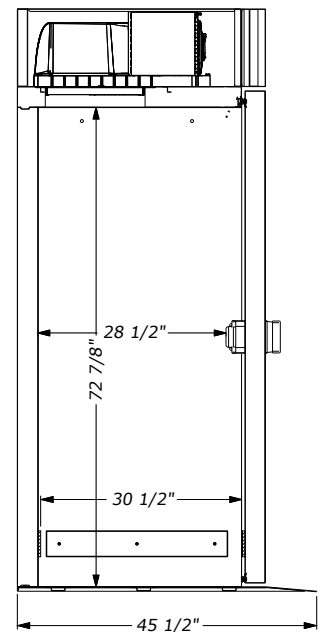

Commercial Warranty

3 Year (parts & labor) / 5 year
sealed system (parts)

See complete warranty for details

