



7 Cu. Ft. Gas Dryer

Dryer

Available Products: FLVG7523BW

Available Colors: White

Version: 10/25

Product Specifications

Dryer

Drum Back Type	Stainless Steel
Drum Material	Aluminized Alloy Steel
Dryness Level Selections	Yes
Heating Element	16000 BTU
Lint Filter	Yes
Moisture Sensor	Yes

Dryer Options

Child Lock	Yes
Damp Dry Signal	Yes
Time Adjust (Add Time)	Yes
Time Adjust (Remove Time)	Yes
Wrinkle Care	Yes

Dryness Level

Max	Yes
Normal	Yes
More Dry	Yes
Less	Yes

Exterior

Reversible Door	Yes
-----------------	-----

Electrical Specifications

Voltage Rating	120 V
----------------	-------

General Specifications

Chime On / Chime Off	Yes
Leveling Legs	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Right to Repair Details

Right to Repair	Available - Visit frigidaire.ca/right-to-repair for more information
-----------------	---

Dryer Cycles

Cycle Count	10
Active Wear	Yes
Air Fluff	Yes
Bulky	Yes
Casual	Yes
Delicates	Yes
Fast Dry	Yes
Heavy Duty	Yes
Normal	Yes
Sanitize	Yes
Timed Dry Time	Yes

Drying Temperatures

Air Fluff	Yes
Low	Yes
Medium	Yes
High	Yes
Maximum	Yes

Controls

Child Lock	Yes
------------	-----

Dimensions and Volume

Height	43 1/10"
Width	27"
Depth	30 1/10"
Depth With Door 90° Open	50"
Dryer Drum Capacity	7 Cu. Ft.

Energy Data

kWh/cycle	2.51 kWh
kWh/year	710 kWh

Safety Certifications and Approvals


CSA Listed	Yes
------------	-----

Installation Diagram

Installation in a Recess or Closet

- 1 A dryer installed in a bedroom, bathroom, recess or closet, MUST be exhausted outdoors.
 - 2 No other fuel burning appliance shall be installed in the same closet as the gas dryer.
 - 3 Your dryer needs the space around it for proper ventilation.
- DO NOT install your dryer in a closet with a solid door.
- 4 Closet door ventilation required: A minimum of 120 square inches (774.2 cm²) of opening, equally divided at the top and bottom of the door, is required. Openings should be located 3 inches (7.6 cm) from bottom and top of door. Openings are required to be unobstructed when a door is installed. A louvered door with equivalent air openings for the full length of the door is acceptable.

Dryer Dimensions

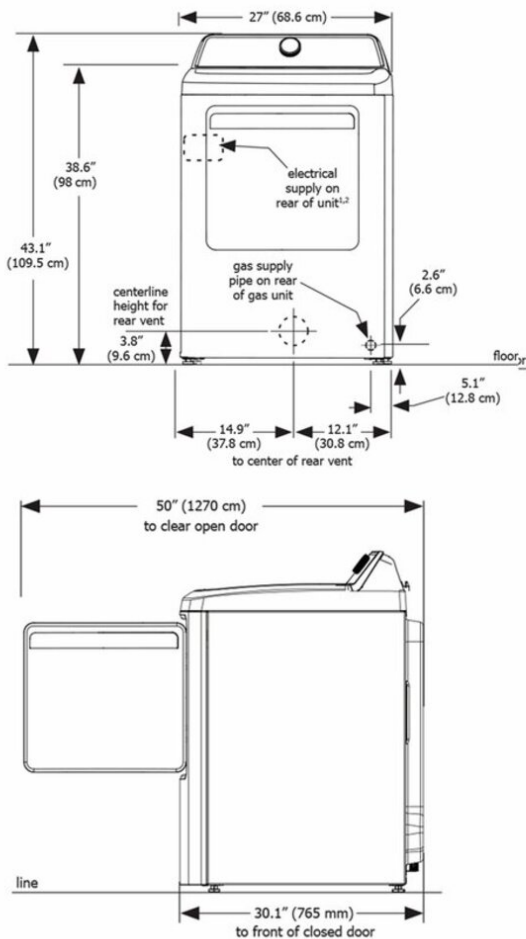

MINIMUM INSTALLATION CLEARANCES - Inches (cm)				
	SIDES	REAR	TOP	FRONT
Alcove	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	n/a
Closet	1" (2.5 cm)	6" (15.2 cm)	24" (61 cm)	2" (5.1 cm)

