

DLE7150X/ DLG7151X

7.3 cu. ft. Rear Control Top Load Dryer

- 7.3 cu.ft. Capacity
- Sensor Dry
- Precise Temperature Control with Variable Heater
- Aluminized Alloy Steel Drum
- LoDecibel™ Quiet Operation



AVAILABLE COLORS



SUMMARY

Type	Rear Control Top Load Dryer
Vent Type	Vented
Dryer Type	Electric / Gas
Capacity	7.3 cu. ft.
Matching Washer	WM7150CX
Sensor Dry	Yes
Steam	No
Colors	Onyx Black (X)

DRYER PROGRAMS

No. of Programs	8
No. of Options	7

Normal, Perm Press, Heavy Duty, Bedding, Delicates, Speed Dry (Manual Dry), Air Dry (Manual Dry), Freshen Up (Manual Dry)

Wrinkle Care, Control Lock, More Time, Less Time, Damp Dry Signal, Energy Saver, Signal

High, Medium, Low

Very Dry, Normal Dry, Damp Dry

60 min., 40 min., 20 min., More Less Time

APPEARANCE

Control & Display	Electronic Control Panel with LED Display
EasyLoad® Door	No
Dial-A-Cycle®	Yes

FABRIC CARE FEATURES

Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes
Steam	No

CONVENIENCE FEATURES

3 Minute Installation Check	Yes
LoDecibel® Quiet Operation	Yes
End of Cycle Signal	Yes
Drum Light (door open)	No
Reversible Door	Yes
FlowSense® Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Control Lock	Yes
Venting Option	Electric: 4 Way Venting Gas: 3 Way Venting
4 Adjustable Legs	Yes
Remaining Time Display/Status Indicator(s)	Yes

SMART FEATURES (ThinQ® TECHNOLOGY)

Smart Diagnosis (v3.0)	Yes
Wi-Fi	No
NFC Tag On Technology	No
ThinQ Care (Remote Start/ Cycle Monitor)	No
Energy Monitoring	No

ENERGY

ENERGY STAR® Certified	Yes
CEF	Electric: 3.94 Gas: 3.49

MATERIALS

Aluminized Alloy Steel Drum	Yes
NeveRust® Stainless Steel Drum	No
Drum Rear	Painted
Cabinet	Painted Steel
Door / Trim	Transparent Glass / Black painted
All Available Colors	Onyx Black(X), Middle Black (M), White (W)

POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	Electric: 240V, 26A Gas: 120V, 60Hz, 5Amps
Type	Electric/ Gas
Plug	Electric: Not Included Gas: Included
Plug Type	Electric: 4-Wire or 3-Wire (Homes built after 1996 require 4-Wire) Gas: 3 Prong
BTU Rating	Electric: N/A Gas: 20,000

OPTIONS

LP Conversion Kit	Electric: N/A Gas: 383EEL3002R
Side Venting Kit	383EEL9001B

LIMITED WARRANTY

Parts & Labor	1 Year
Drum	3 Years

UPC CODES

DLE7150X (Electric)	195174142349
DLG7151X (Gas)	195174144343

DIMENSION / CLEARANCES



DIMENSIONS

Product (WxHxD)	27" x 44 1/2" x 29 1/2" (50 1/4" D with door open)
Carton (WxHxD)	29" x 46 1/2" x 31 3/8"
Weight (Product)	Electric: 111.3 lbs. Gas: 114 lbs.
Weight (Carton)	Electric: 121.6 lbs. Gas: 125.3 lbs.

DIMENSION / CLEARANCES


CLOSET VENTILATION REQUIREMENTS

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

DIMENSION / CLEARANCES

INSTALLATION SPACING FOR CABINET

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

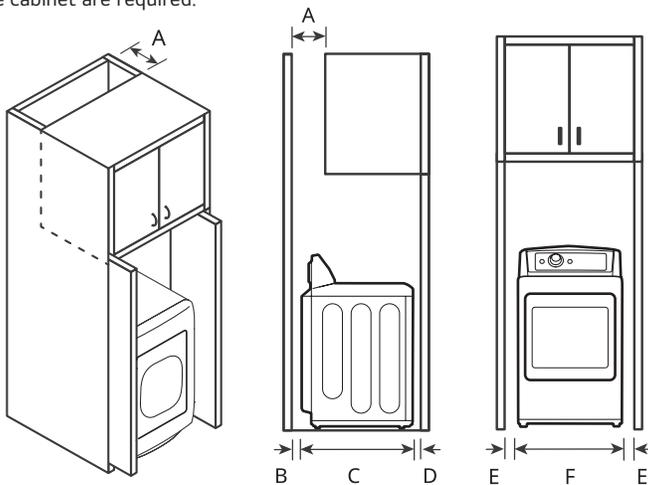


DIMENSIONS

A Depth of Ventilation Opening	≥ 7" (178mm)
B Back Clearance	≥ 5" (127mm)
C Depth	29 1/2" (750mm)
D Front Clearance	≥ 1" (25 mm)
E Side Clearance	≥ 1" (25 mm)
F Width	27" (686 mm)

DIMENSION / CLEARANCES

Installation Spacing for Recessed Area or Closet Installation
These clearance are recommended for this dryer.

- Additional clearance should be considered for ease of installation and servicing.
- Additional clearance should be considered on all sides of the dryer to reduce noise transfer.

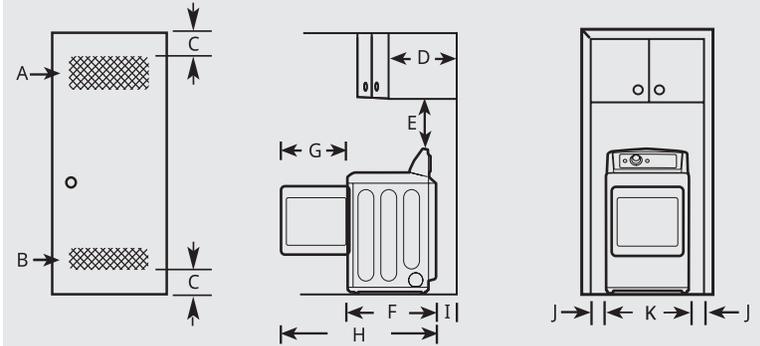

DIMENSIONS

A Upper Ventilation Opening	≥ 48 sq. in. (310 cm ²)
B Lower Ventilation Opening	≥ 24 sq. in. (155 cm ²)
C Distance to Ventilation Opening	≥ 3" (76 mm)
D Overhead Cabinet Depth	≤ 14" (356 mm)
E Distance to the Overhead Cabinet / Shelf	≥ 18" (457 mm)
F Depth	29 1/2" (750 mm)
G Length of Door Swing	21 1/4" (540 mm)
H Maximum Depth With Door Open	50 1/4" (1275 mm)
I Back Clearance	≥ 5" (127 mm)
J Side Clearance	≥ 1" (25 mm)
K Width	27" (686 mm)

LEVELING THE APPLIANCE

CHECKING THE LEVEL

Position the appliance in the final location and place a level across the top of the appliance.

- 1 Level
- 2 Level Feet

