

30" MINIMAL OVENS AND COMPANIONS

PLANNING GUIDE

SERIES 9 & 11

SELF-CLEANING OVEN | OB30SMPUB3, OB30SMPUG3

SELF-CLEANING STEAM ASSIST OVEN | OB30SMPSUB3, OB30SMPSUG3

COMBI-STEAM | OS30SMUB3, OS30SMUG3

COMPACT COMBI-STEAM | OS30NMUB3, OS30NMUG3

COMPACT CONVECTION-SPEED | OM30NMUB3, OM30NMUG3

BUILT-IN COFFEE MAKER | EB30MSB3

WARMING DRAWER | WB30SMB3, WB30SMG3, WB30SDEI3

VACUUM DRAWER | VB30SMB3, VB30SMG3, VB30SDEI3

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONCEPT DESIGN	PAGE
DESIGN CHOICE	
Styles	4
Minimal Family	5
Installation Options	6
Overview	7
SPECIFICATION GUIDE	
Self-Cleaning Oven	9
Self-Cleaning Steam Assist Oven	10
Combi-Steam Oven	11
Compact Combi-Steam Oven	12
Compact Convection-Speed Oven	13
Built-In Coffee Maker	14
Warming Drawer	15
Integrated Warming Drawer	16
Vacuum Seal Drawer	17
Integrated Vacuum Seal Drawer	18
Dimensions - Ovens	19
Dimensions - Compact Ovens & Built-In Coffee Maker	20
Dimensions - Drawers	21
Services	22

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

DEVELOPED AND DETAILED DESIGN	PAGE
DATA SHEETS	
Self-Cleaning Oven	24
Self-Cleaning Steam Assit Oven	25
Combi-Steam Oven	26
Compact Combi-Steam Oven	27
Compact Convection-Speed Oven	28
Built-In Coffee Maker	29
Warming Drawer	30
Integrated Warming Drawer	31
Vacuum Seal Drawer	32
Integrated Vacuum Seal Drawer	33

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

DEVELOPED AND DETAILED DESIGN	PAGE
PLANNING CONSIDERATIONS	
Cabinetry Preparation	35
Clearances	36
Ventilation	37
Stack Height	38
Self-Cleaning Oven	39
Self-Cleaning Steam Assist Oven	40
Combi-Steam Oven	41
Compact Combi-Steam Oven	42
Compact Convection-Speed Oven	43
Built-in Coffee Maker	44
Warming Drawer	45
Integrated Warming Drawer	46
Vacuum Seal Drawer	47
Integrated Vacuum Seal Drawer	48
SERVICES	
Power Cord Length and Location - Ovens	50
Power Cord Length and Location - Compact	51
Power Cord Length and Location - Drawers	52

DESIGN CHOICE



MINIMAL STYLE - HANDLELESS

MINIMAL STYLE

CONTEMPORARY STYLE

PROFESSIONAL STYLE

Celebrating a singular aesthetic to blend seamlessly into the kitchen, Minimal style ovens feature subtle textural and tonal contrasts for a sense of refinement and purity.

Defined by clean lines and timeless design cues, Contemporary style ovens bring a sense of balance and refinement. A versatile aesthetic that complements a range of kitchen styles.

Distinctive and bold, Professional style ovens are the perfect interpretation of the commercial kitchen for the home chef. Experience refined performance with stainless steel construction that is built to last.

This Planning Guide is for the Minimal style featuring 30" Ovens and Companions. For information on other styles, please visit the Fisher and Paykel website. To see what models are available, head to the 'Overview' section in this Planning Guide.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FINISH

Black

Grey

OVENS

SELF-CLEANING

SELF-CLEANING

STEAM ASSIST

STEAM

SPEED

Minimal Handleless Family
Series 9 and 11

Minimal Handle Family
Series 9 and 11

COMPANIONS

COFFEE MAKER

WARMING DRAWERS
VACUUM SEAL DRAWERS

INSTALLATION OPTIONS

Installation in wall

Installation under-bench

*Integrated model, panel ready for a custom front panel.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FISHER & PAYKEL

90004604B

PLANNING GUIDE 30" OVENS AND COMPANIONS VERSION B - OCTOBER 2025

© FISHER & PAYKEL APPLIANCES LIMITED 2025

PAGE 5

CONSIDERATIONS


Different configurations possible, consider heights for grid and row installations.

STACK HEIGHT


Stack Height is overall product height with minimum clearance above appliance front panel to upper cabinetry front panel or appliance.

STACKED INSTALLATION

Stack Height
52 3/8" (1331mm)

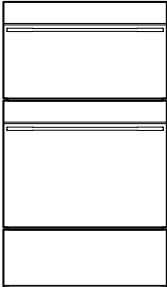


Stack Height
57 9/16" (1462mm)

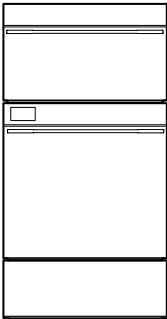


GRID INSTALLATION


Stack Height
46 7/8" (1191mm)



Stack Height
28 3/4" (731mm)




Stack Height
28 3/4" (731mm)




ROW INSTALLATION

Stack Height
28 3/4" (731mm)

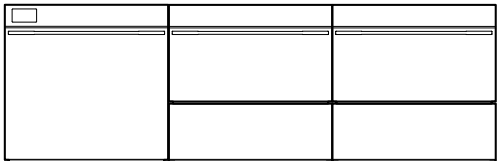

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

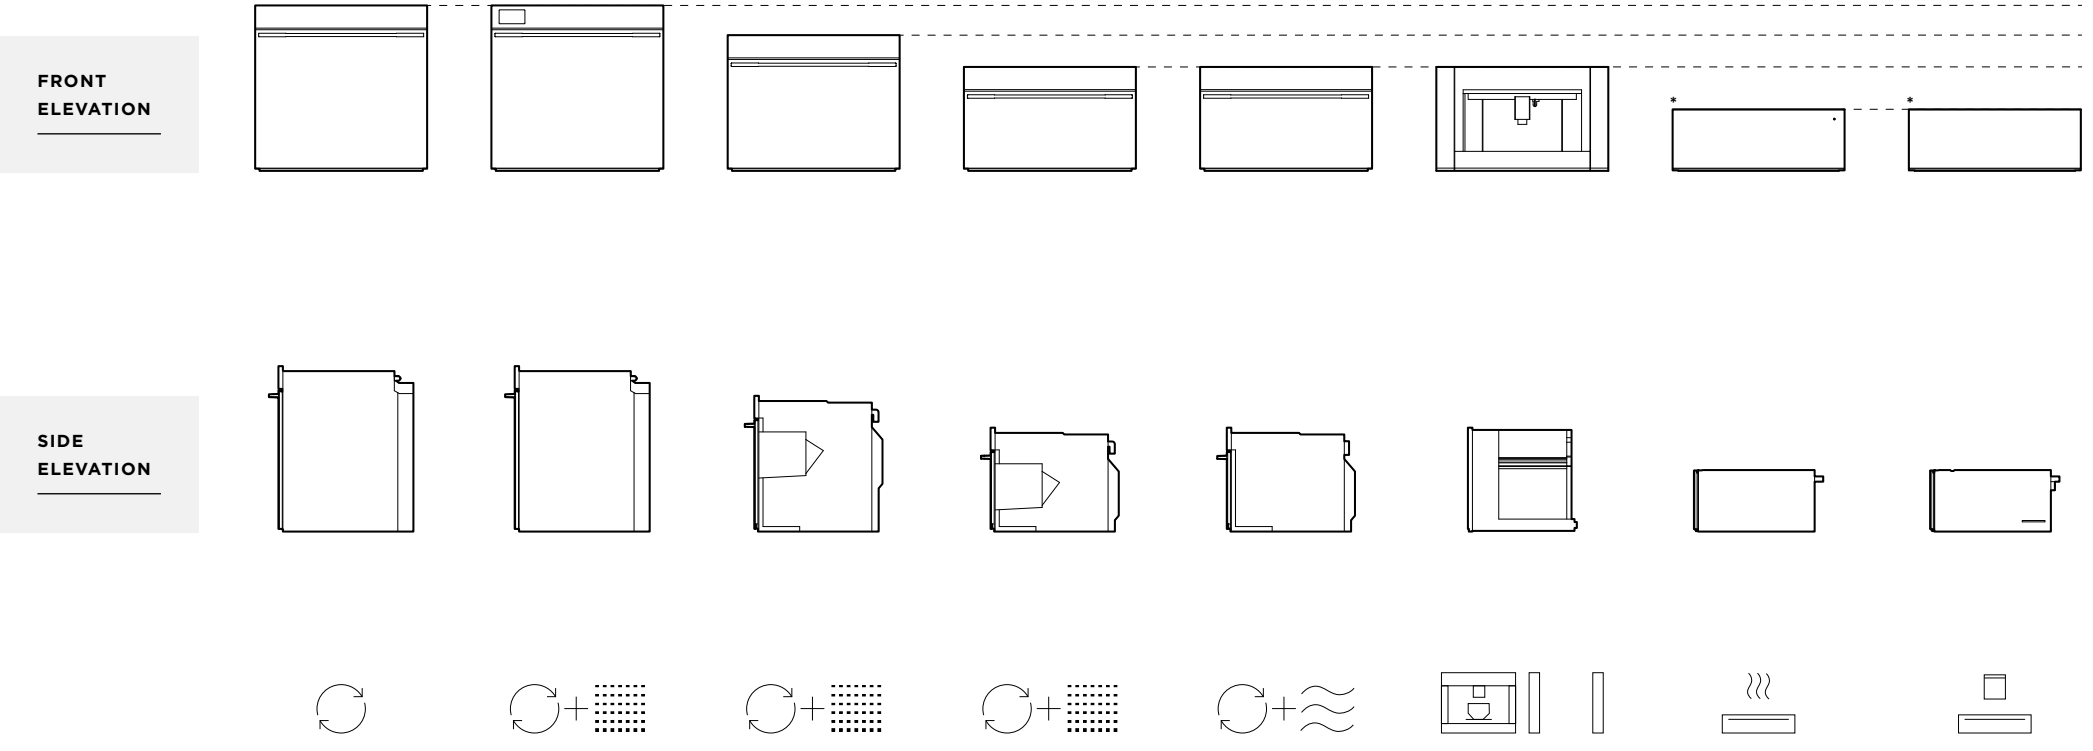

	SELF-CLEANING OVEN	SELF-CLEANING STEAM ASSIST OVEN	COMBI-STEAM OVEN	COMPACT COMBI-STEAM OVEN	COMPACT CONVECTION-SPEED OVEN	BUILT-IN COFFEE MAKER	WARMING DRAWER	VACUUM SEAL DRAWER
Series	Series 9	Series 11	Series 11	Series 9	Series 9	Series 9	Series 9	Series 9
Black Models	OB30SMPUB3	OB30SMPSUB3	OS30SMUB3	OS30NMUB3	OM30NMUB3	EB30MSB3	WB30SMB3	VB30SMB3
Grey Models	OB30SMPUG3	OB30SMPSUG3	OS30SMUG3	OS30NMUG3	OM30NMUG3	-	WB30SMG3	VB30SMG3
Integrated Models	-	-	-	-	-	-	WB30SDEI3	VB30SDEI3
Interface	6.8" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	4.3" Touchscreen	-	-
Overall Height	28 11/16" (729mm)	28 11/16" (729mm)	23 9/16" (598mm)	18" (458mm)	18" (458mm)	18" (458mm)	10 11/16" (271mm)	10 11/16" (271mm)
Front Panel Thickness	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)

*Integrated models available.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATION GUIDE

SERIES 11 & 9



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

OVERVIEW

Designed to complement Minimal style appliances, this handled oven offers a sleek, flush finish that integrates seamlessly into the kitchen. Pyrolytic self-cleaning simplifies maintenance, while precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OB30SMPUB3 - Black
30" Series 9 Minimal Self-Cleaning Oven

OB30SMPUG3 - Grey
30" Series 9 Minimal Self-Cleaning Oven

SERIES & STYLE

Series 9
Minimal

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ③ Premium soft-close door with advanced thermal performance
- ④ Generous 4.6 cu ft useable capacity
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Twin vertical fans, perfect for multi-shelf cooking
- ⑧ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑨ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray
- ④ Roasting Dish
- ⑤ Wired Temperature Sensor



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

OVERVIEW

Designed to complement Minimal style appliances, this oven delivers a seamless, flush finish – ideal for modern kitchen designs. Steam Assist enhances convection cooking, while pyrolytic cleaning simplifies maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OB30SMPSUB3 - Black
30" Series 11 Minimal Self-Cleaning Steam Assist Oven

OB30SMPSUG3 - Grey
30" Series 11 Minimal Self-Cleaning Steam Assist Oven

SERIES & STYLE

Series 11
Minimal

ACCESSORIES

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray
- ④ Roasting Dish
- ⑤ Wired Temperature Sensor
- ⑥ Descale Solution - 2 sachets (Part 580925)

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Steam Assist combines convection heat with steam to enhance the cooking process
- ③ Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ④ Premium soft-close door with advanced thermal performance
- ⑤ Generous 4.6 cu ft useable capacity
- ⑥ Large 6.8" touchscreen is intuitive and easy to use
- ⑦ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑧ Twin vertical fans, perfect for multi-shelf cooking
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

OVERVIEW

Designed to complement Minimal style appliances, this Combi-Steam oven delivers a seamless, flush finish – ideal for modern kitchen designs. Featuring a larger cavity ideal for cooking larger dishes and multiple trays simultaneously. With versatile cooking options including steam or convection, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OS30SMUB3 - Black
30" Series 11 Minimal Combi-Steam Oven

OS30SMUG3 - Grey
30" Series 11 Minimal Combi-Steam Oven

SERIES & STYLE

Series 11
Minimal

ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf (x2)
- ③ Step Down Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack
- ⑥ Smokeless Broil Tray

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Premium soft open and close door
- ④ Generous 2.5 cu ft useable capacity with six shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ⑦ Large Perforated Steam Dish
- ⑧ Small Perforated Steam Dish
- ⑨ Large Steam Dish
- ⑩ Wired Temperature Sensor
- ⑪ Descale Solution - 2 sachets (Part 580925)



OVERVIEW

Designed to complement Minimal style appliances, this Combi-Steam oven delivers a seamless, flush finish – ideal for modern kitchen designs. With versatile cooking options including steam or convection, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OS30NMUB3 - Black
30" Series 9 Minimal Compact Combi-Steam Oven

OS30NMUG3 - Grey
30" Series 9 Minimal Compact Combi-Steam Oven

SERIES & STYLE

Series 9
Minimal

ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf
- ③ Flat Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Premium soft open and close door
- ④ 1.6 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ⑥ Large Perforated Steam Dish
- ⑦ Small Perforated Steam Dish
- ⑧ Large Steam Dish
- ⑩ Wired Temperature Sensor
- ⑪ Descale Solution - 2 sachets (Part 580925)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to complement Minimal style appliances, this Convection-Speed oven delivers a seamless, flush finish – ideal for modern kitchen designs. Versatile cooking options including microwave or convection offer efficient heating across a variety of dishes. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OM30NMUB3 - Black
30" Series 9 Minimal Compact Convection-Speed Oven

OM30NMUG3 - Grey
30" Series 9 Minimal Compact Convection-Speed Oven

SERIES & STYLE

Series 9
Minimal

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Combines fast microwave cooking with even convection heat for versatile, efficient heating across a variety of dishes
- ③ With soft open and close, the CoolTouch door is safe to touch from the outside - protecting hands and surrounding cabinetry
- ④ Generous 1.3 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ 22 functions, including four microwave-only, 14 traditional oven and four combination settings
- ⑧ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑨ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ① Chrome Side Ladders
- ② Flat Wire Shelf
- ③ Step Down Wire Shelf
- ④ Broil Rack
- ⑤ Glass Tray
- ⑥ Wired Temperature Sensor

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to complement Minimal style appliances, this Coffee Maker delivers a seamless, flush finish – ideal for modern kitchen designs. It remembers your favorite brews over time, offering personalized coffee at the touch of a button. With precise grinding, creamy milk frothing, and effortless self-cleaning, it brings barista-quality coffee home.

PRODUCTS

EB30MSB3 - Black
30" Series 9 Minimal Built-in Coffee Maker

SERIES & STYLE

Series 9
Minimal


FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Intuitive touch display brews a perfect cup of coffee at the touch of a button
- ③ Programmable timer turns on the Coffee Maker at the ideal time each day
- ④ Personalised coffee and smart self-learning menu preferences with 13 functions to suit any taste
- ⑤ Allows you to prepare hot milk or creamy froth in seconds
- ⑥ Stainless steel conical burr grinder with 13 coarseness positions
- ⑦ 15 bar pump pressure
- ⑧ Self-cleaning function and easy to empty coffee grounds container and drip tray
- ⑨ 81 fl oz (2.4L) water tank capacity

ACCESSORIES

- ① Milk Container (Auto-Froth)
- ② Steam Wand
- ③ Coffee Spoon
- ④ Cleaning Brush
- ⑤ Descaler Solution - 1 bottle
- ⑥ Water Hardness Indicator Paper
- ⑦ Water Filter

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

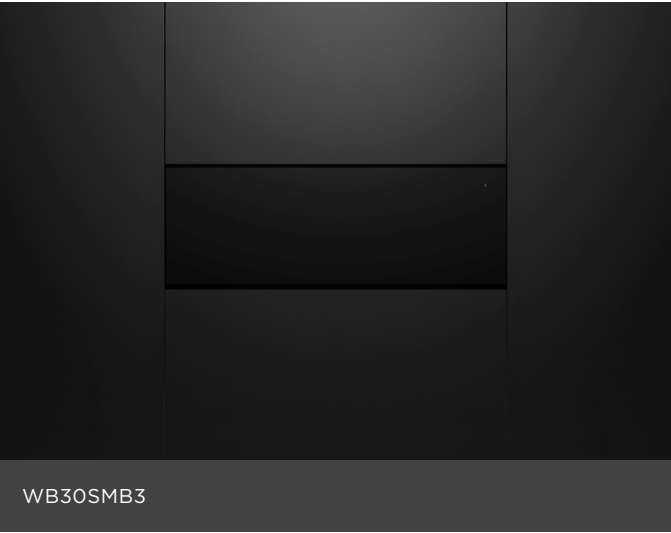

OVERVIEW

Designed to complement Minimal style appliances, this Warming Drawer delivers a seamless, flush finish – ideal for modern kitchen designs. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

PRODUCTS

WB30SMB3 - Black
30" Series 9 Minimal Warming Drawer

WB30SMG3 - Grey
30" Series 9 Minimal Warming Drawer

SERIES & STYLE

Series 9
Minimal

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean glass base
- ⑤ Automatic switch-off and delayed start functionality to help keep dishes warm until it is time to serve
- ⑥ Room for 16 standard-sized place settings
- ⑦ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility

ACCESSORIES

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



Integrated Warming Drawer WB30SDEI3 with Compact Combi-Steam Oven OS30NMUB3



Integrated Warming Drawer WB30SDEI3

OVERVIEW

Panel ready design allows for seamless integration and customisation of this Warming Drawer with kitchen cabinetry for a cohesive kitchen look. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

PRODUCTS

WB30SDEI3*
30" Series 9 Integrated Warming Drawer

*Panel ready.

SERIES & STYLE

Series 9
Integrated



FEATURES

- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Automatic switch-off and delayed start functionality, to help keep dishes warm until it is time to serve
- ⑤ Room for 16 standard-sized place settings
- ⑥ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility

ACCESSORIES

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

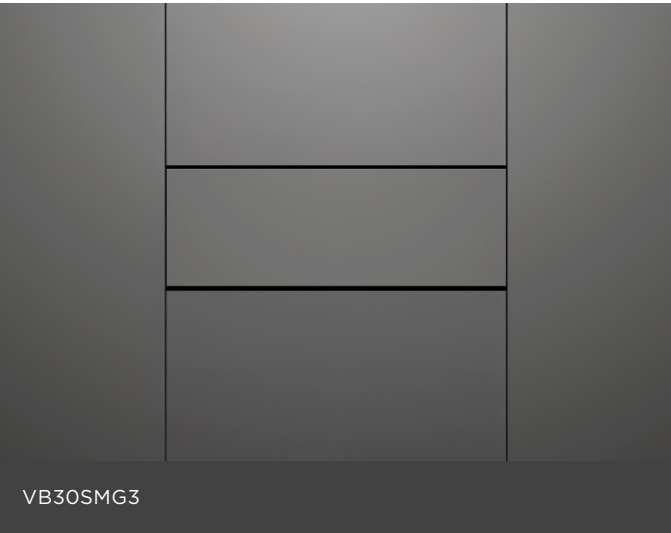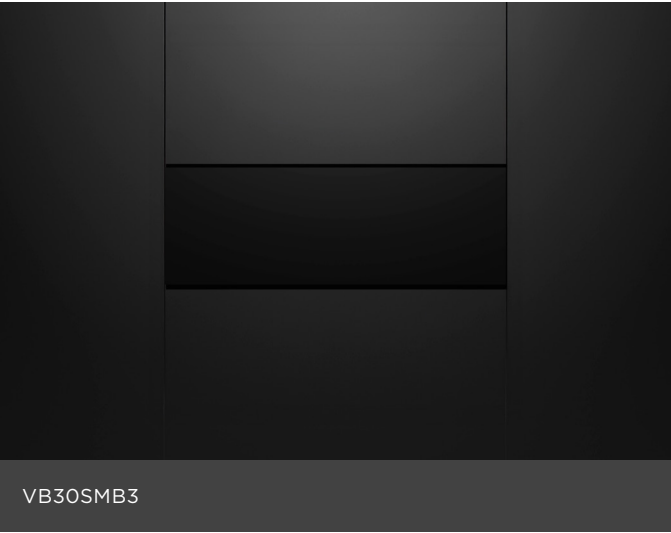

OVERVIEW

Designed to complement Minimal style appliances, this Vacuum Seal Drawer delivers a seamless, flush finish – ideal for modern kitchen designs. A push-to-open mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

PRODUCTS

VB30SMB3 - Black
30" Series 9 Minimal Vacuum Seal Drawer

VB30SMG3 - Grey
30" Series 9 Minimal Vacuum Seal Drawer

SERIES & STYLE

Series 9
Minimal

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean glass base
- ⑤ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑥ Allows effortless preparation for sous vide cooking
- ⑦ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately.

ACCESSORIES

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



Integrated Vacuum Seal Drawer VB30SDEI3 with Compact Combi-Steam Oven OS30NMUB3



Integrated Vacuum Seal Drawer VB30SDEI3

OVERVIEW

Panel ready design allows for seamless integration and customisation of this Vacuum Seal Drawer with kitchen cabinetry for a cohesive kitchen look. A push-to-open mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

PRODUCTS

VB30SDEI3*
30" Series 9 Integrated Vacuum Seal Drawer

*Panel ready.

SERIES & STYLE

Series 9
Integrated

FEATURES

- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑤ Allows effortless preparation for sous vide cooking
- ⑥ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately.







ACCESSORIES

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

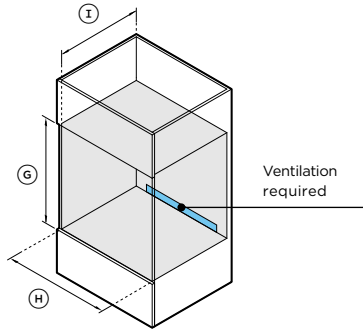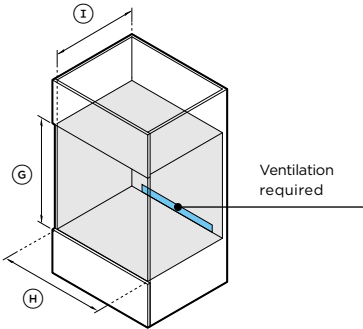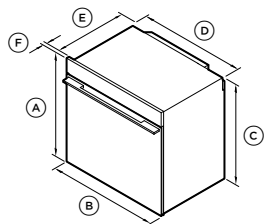

PRODUCT DIMENSIONS		
A	Overall height	
B	Overall width	
C	Chassis height	
D	Chassis width	
E	Chassis depth	
F	Control panel thickness	
	Depth with door fully open*	

*Measured from front of control panel.

CAVITY DIMENSIONS		
G	Minimum inside height of cavity	
H	Minimum inside width of cavity	
I	Minimum inside depth of cavity*	
	Recommended cabinet height	
	Recommended cabinet width	

*Measured from front of chassis.**Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide.

SELF-CLEANING OVEN		
OB30SMPUB3, OB30SMPUG3		
	inch	mm
A	28 11/16	729
B	29 7/8	758
C	27 7/8	708
D	28 3/8	720
E	22 5/8	575
F	13/16	20
	23 3/8	594

	inch	mm
G	28 1/32	712
H	28 1/2	724
I	23 1/2**	597**
	28 3/4	731
	30	762

SELF-CLEANING STEAM ASSIST OVEN		
OB30SMPSUB3, OB30SMPUG3		
	inch	mm
A	28 11/16	729
B	29 7/8	758
C	27 7/8	708
D	28 3/8	720
E	22 5/8	575
F	13/16	20
	23 3/8	594

	inch	mm
G	28 1/32	712
H	28 1/2	724
I	23 1/2**	597**
	28 3/4	731
	30	762







COMBI-STEAM OVEN		
OS30SMUB3, OS30SMUG3		
	inch	mm
A	23 9/16	598
B	29 7/8	758
C	22 5/8	575
D	28 3/8	720
E	22 7/16	545
F	13/16	20
	18 1/8	460

	inch	mm
G	22 13/16	580
H	28 1/2	724
I	21 5/8	550
	24	600
	30	762

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

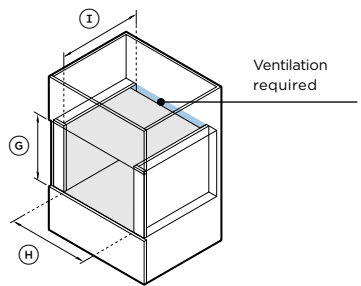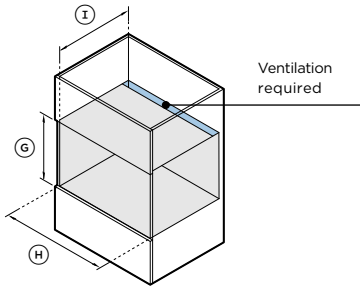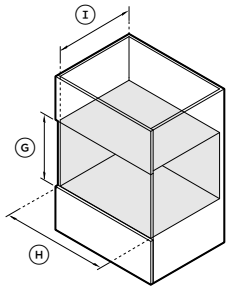

PRODUCT DIMENSIONS	
A Overall height	18
B Overall width	29 7/8
C Chassis height	17 1/8
D Chassis width	28 3/8
E Chassis depth	21 7/16
F Control panel thickness	13/16
Depth with door fully open**	12 5/8

*Measurements with trim kit. **Measured from front of control panel.

CAVITY DIMENSIONS	
G Minimum inside height of cavity	17 5/16
H Minimum inside width of cavity	28 1/2
I Minimum inside depth of cavity*	21 5/8
Recommended cabinet height	18 1/8
Recommended cabinet width	30

*Measured from front of chassis. **Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide. ***Cabinetry requires additional vertical sidewalls to secure the product.

COMPACT COMBI-STEAM OVEN OS30NMUB3, OS30NMUG3		
	inch	mm
A Overall height	18	458
B Overall width	29 7/8	758
C Chassis height	17 1/8	435
D Chassis width	28 3/8	720
E Chassis depth	21 7/16	545
F Control panel thickness	13/16	20
Depth with door fully open**	12 5/8	320

	inch	mm
G Minimum inside height of cavity	17 5/16	440
H Minimum inside width of cavity	28 1/2	724
I Minimum inside depth of cavity*	21 5/8	550
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

COMPACT CONVECTION-SPEED OVEN OM30NMUB3, OM30NMUG3		
	inch	mm
A Overall height	18	458
B Overall width	29 7/8	758
C Chassis height	17 1/8	435
D Chassis width	28 3/8	720
E Chassis depth	21 7/16	545
F Control panel thickness	13/16	20
Depth with door fully open**	12 5/8	320





	inch	mm
G Minimum inside height of cavity	17 5/16	440
H Minimum inside width of cavity	28 1/2	724
I Minimum inside depth of cavity*	21 5/8**	550**
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

BUILT-IN COFFEE MAKER EB30MSB3		
	inch	mm
A Overall height	18*	458*
B Overall width	29 7/8*	758*
C Chassis height	17 1/2	445
D Chassis width	22 1/16	560
E Chassis depth	18 1/8	460
F Control panel thickness	13/16*	20*
Depth with door fully open**	-	-





	inch	mm
G Minimum inside height of cavity	17 3/4	450
H Minimum inside width of cavity	22 1/16***	560***
I Minimum inside depth of cavity*	22 1/16**	560**
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS



CAVITY DIMENSIONS

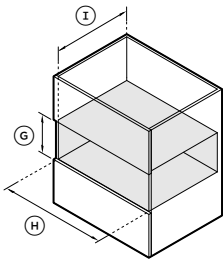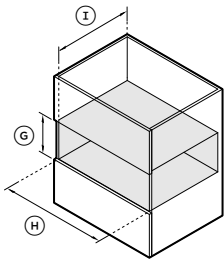


	WARMING DRAWER WB30SMB3, WB30SMG3		INTEGRATED WARMING DRAWER WB30SDEI3		VACUUM SEAL DRAWER VB30SMB3, VB30SMG3		INTEGRATED VACUUM SEAL DRAWER VB30SDEI3	
	inch	mm	inch	mm	inch	mm	inch	mm
PRODUCT DIMENSIONS								
A Overall height	10 11/16	271	10 11/16	271	10 11/16	271	10 11/16	271
B Overall width	29 7/8	758	29 7/8	758	29 7/8	758	29 7/8	758
C Chassis height	10 11/16	271	10 11/16	271	10 11/16	271	10 11/16	271
D Chassis width	27 3/4	704	28 15/32	723	28 1/2**	724**	28 15/32**	723**
E Chassis depth*	21 9/16	547	22 9/32	566	21 11/16	551	22 1/2	572
F Front panel thickness	13/16	20	min 5/8***	min 16***	13/16	20	min 5/8***	min 16***
Front panel height	10 1/2	267	min 10 1/2	min 267	10 1/2	267	min 10 1/2	min 267
Front panel width	29 7/8	758	min 29 7/8	min 758	29 7/8	758	min 29 7/8	min 758
CAVITY DIMENSIONS								
G Minimum inside height of cavity	10 3/4	273	10 3/4	273	10 3/4	273	10 3/4	273
H Minimum inside width of cavity	28 1/2	724	28 1/2	724	28 1/2	724	28 1/2	724
I Minimum inside depth of cavity*	22 13/16	580	22 13/16	580	22 13/16	580	22 13/16	580
Recommended cabinet height	10 3/4	273	10 3/4	273	10 3/4	273	10 3/4	273
Recommended cabinet width	30	762	30	762	30	762	30	762

*Including power plug. **Including side brackets. ***A clearance of 1/16" (2mm) between the cabinet and the custom panel is required for the push-to-open mechanism (spacer included). Maximum custom panel weight 11 lb (5kg).

*Measured from front of chassis.
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

ISOMETRIC
VIEW

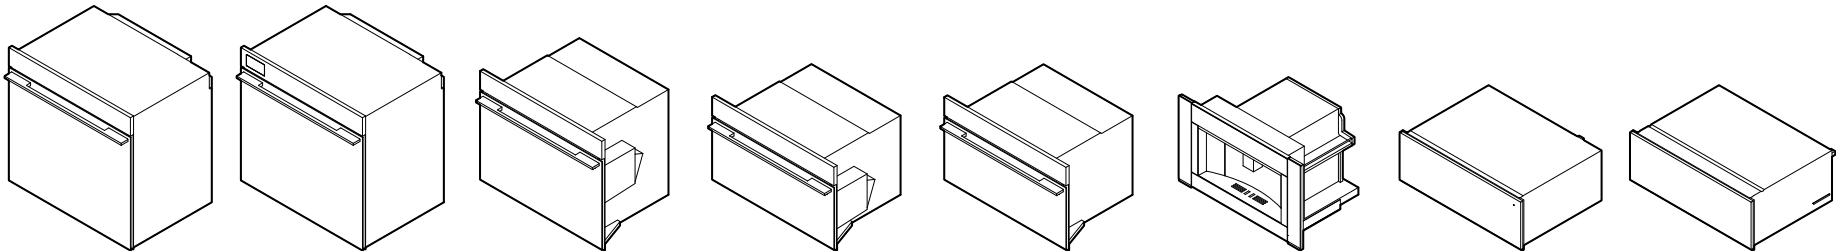


	SELF-CLEANING OVEN OB30SMPUB3, OB30SMPUG3	SELF-CLEANING STEAM ASSIST OVEN OB30SMPSUB3, OB30SMPSUG3	COMBI-STEAM OVEN OS30SMUB3, OS30SMUG3	COMPACT COMBI-STEAM OVEN OS30NMUB3, OS30NMUG3	COMPACT CONVECTION- SPEED OVEN OM30NMUB3, OM30NMUG3	BUILT-IN COFFEE MAKER EB30MSB3	WARMING DRAWER WB30SMB3, WB30SMG3, WB30SDEI3	VACUUM SEAL DRAWER VB30SMB3, VB30SMG3, VB30SDEI3
PRODUCT REQUIREMENTS								
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz
Service	20 A	20 A	20 A	20 A	20 A	15 A	15 A	15 A
Connection	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Plug with flex cord 66 15/16" (1700mm)	Plug with flex cord 70 7/8" (1800mm)	Plug with flex cord 70 7/8" (1800mm)
WEIGHT								
Packaged	209lb (95kg)	214lb (97kg)	152lb (69kg)	121lb (55kg)	121lb (55kg)	72lb (33kg)	66lb(30kg) Integrated 60lb (27kg)	148lb(67kg) Integrated 106lb (48kg)
Unpackaged	176lb (80kg)	181lb (82kg)	119lb (54kg)	101lb (46kg)	101lb (46kg)	52lb (24kg)	55lb(25kg) Integrated 51lb (23kg)	121lb(55kg) Integrated 99lb (45kg)
CAPACITY								
Total Oven capacity	4.9cu ft (137L)	4.9cu ft (137L)	3cu ft (85L)	1.9cu ft (55L)	1.7cu ft (49L)	-	-	-
Total water tank capacity	-	22.65fl oz (0.67L)	47.3fl oz (1.4L)	47.3fl oz (1.4L)	-	81 fl oz (2.4L)	-	-

Note: All Coffee Makers and Steam Ovens have internal water tanks which need to be filled manually. No external water supply is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DATA SHEETS

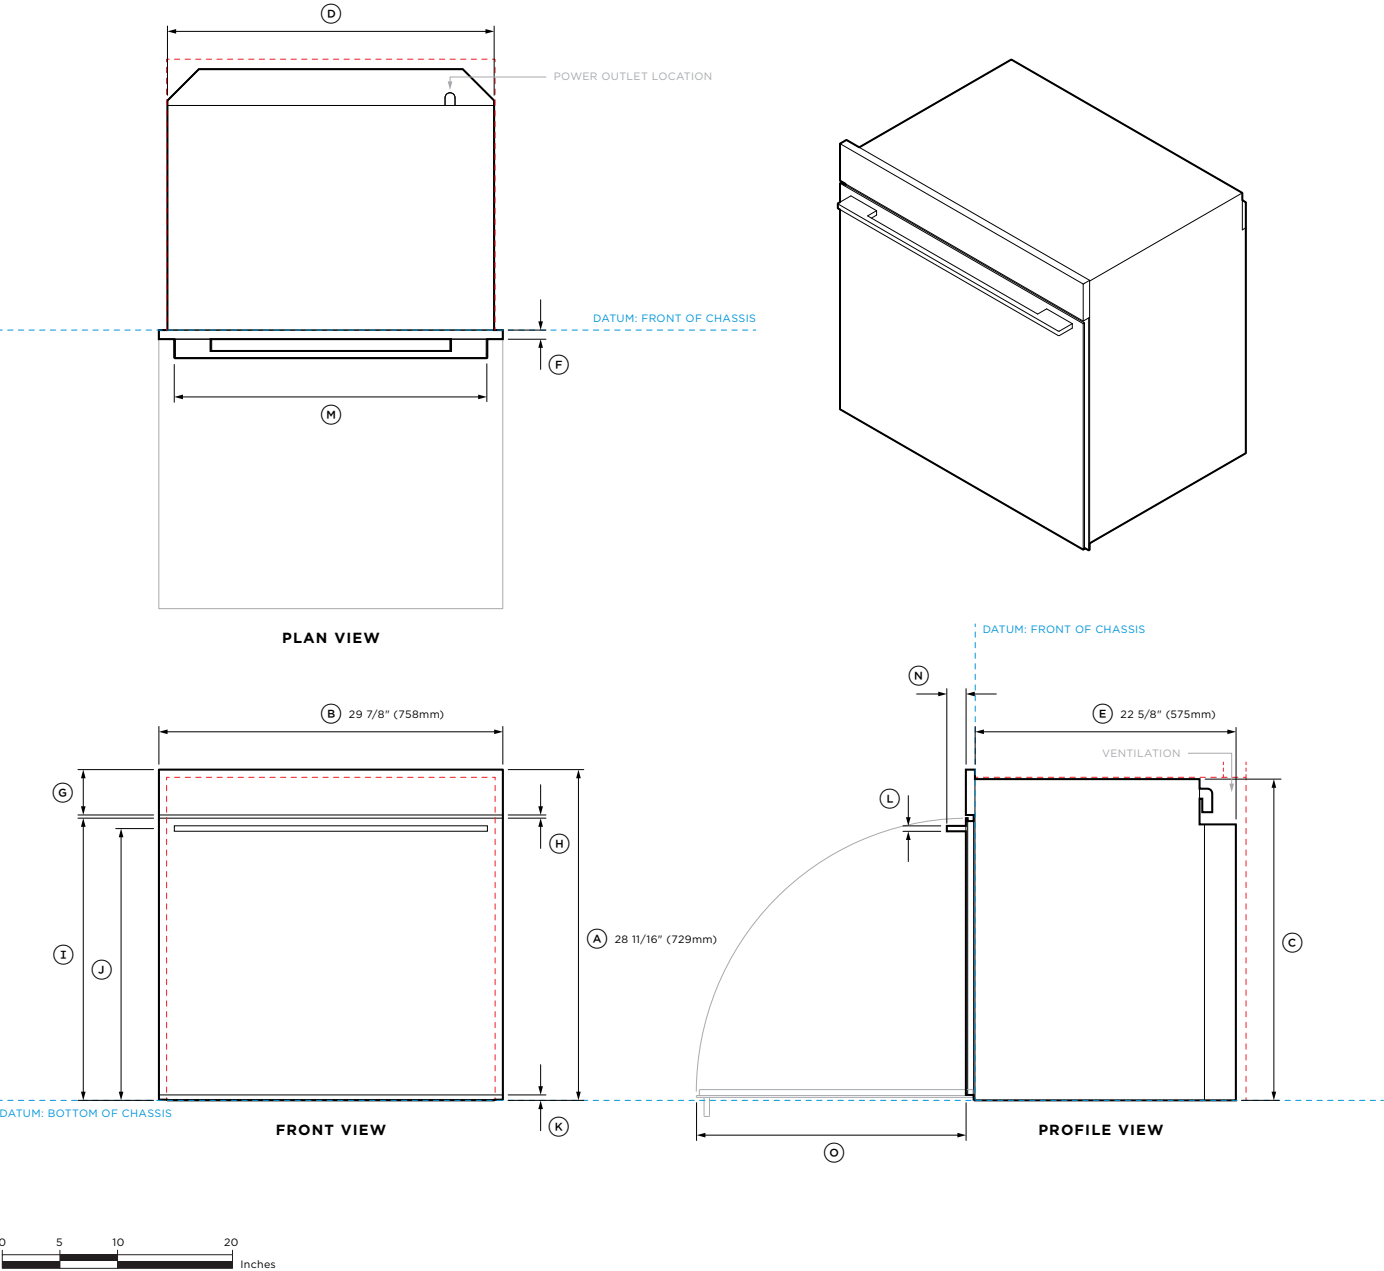

Model no:		
OB30SMPUB3	30" Series 9 Minimal Self-Cleaning Oven - Black	
OB30SMPUG3	30" Series 9 Minimal Self-Cleaning Oven - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	28 11/16	729
(B) Overall width of product	29 7/8	758
(C) Height of chassis	27 7/8	708
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	22 5/8	575
(F) Thickness of control panel (excludes handle)	13/16	20
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	24 1/2	622
(J) Height from bottom datum to centerline of handle	23 19/32	599
(K) Visual gap height	15/32	12
(L) Thickness of handle	15/32	12
(M) Width of handle	27 5/32	690
(N) Depth of handle	1 21/32	42
(O) Depth with door fully open*	23 3/8	594


*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	28 1/32	712
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	23 1/2	597
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	28 3/4	731
Recommended cabinet width	30	762

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

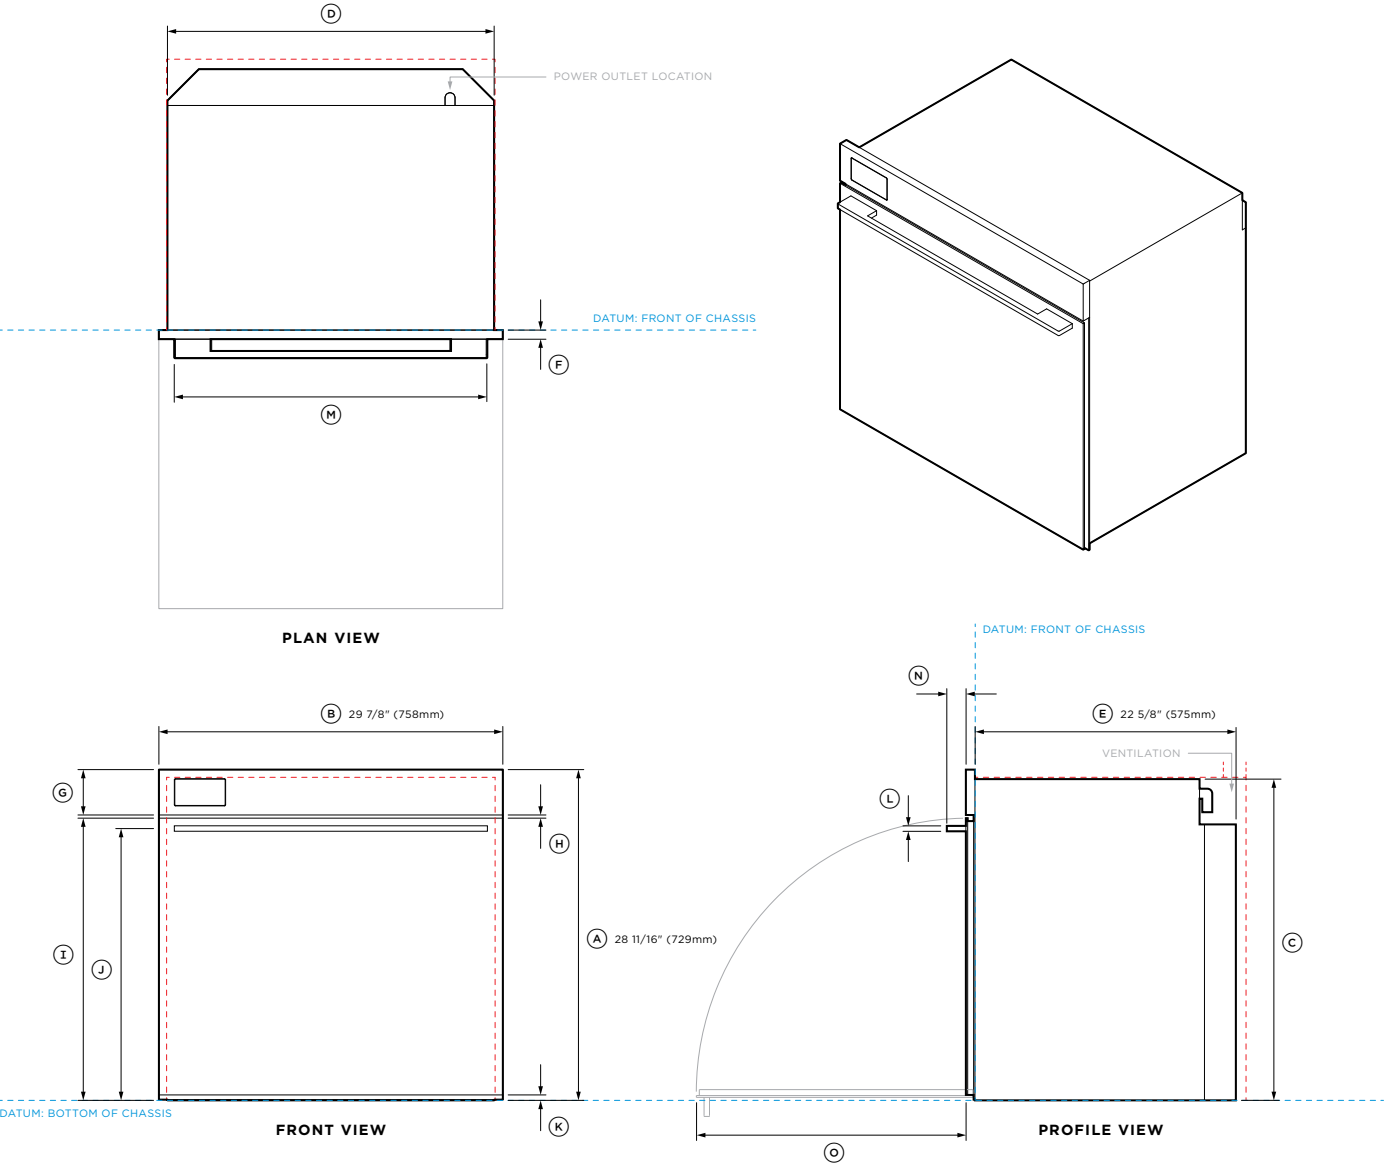

Model no:	
OB30SMPSUB3	30" Series 11 Minimal Self-Cleaning Steam Assist Oven - Black
OB30SMPSUG3	30" Series 11 Minimal Self-Cleaning Steam Assist Oven - Grey

Product Dimensions		inch	mm
A	Overall height of product	28 11/16	729
B	Overall width of product	29 7/8	758
C	Height of chassis	27 7/8	708
D	Width of chassis	28 3/8	720
E	Depth of chassis	22 5/8	575
F	Thickness of control panel (excludes handle)	13/16	20
G	Height of control panel	3 15/16	100
H	Gap between door and control panel	9/32	7
I	Height from bottom datum to top of door	24 1/2	622
J	Height from bottom datum to centerline of handle	23 19/32	599
K	Visual gap height	15/32	12
L	Thickness of handle	15/32	12
M	Width of handle	27 5/32	690
N	Depth of handle	1 21/32	42
O	Depth with door fully open*	23 3/8	594




*Measured from front of control panel.

Minimum Clearances		inch	mm
Minimum inside height of cavity		28 1/32	712
Minimum inside width of cavity		28 1/2	724
Minimum inside depth of cavity*		23 1/2	597
Rear ventilation height**		2 5/32	55
Rear ventilation width**		24	600
Minimum clearance above products control panel to upper cabinetry front panel or appliance		1/16	2
Minimum clearance between adjacent front panel or appliance		1/16	2
Recommended cabinet height		28 3/4	731
Recommended cabinet width		30	762

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
..... INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

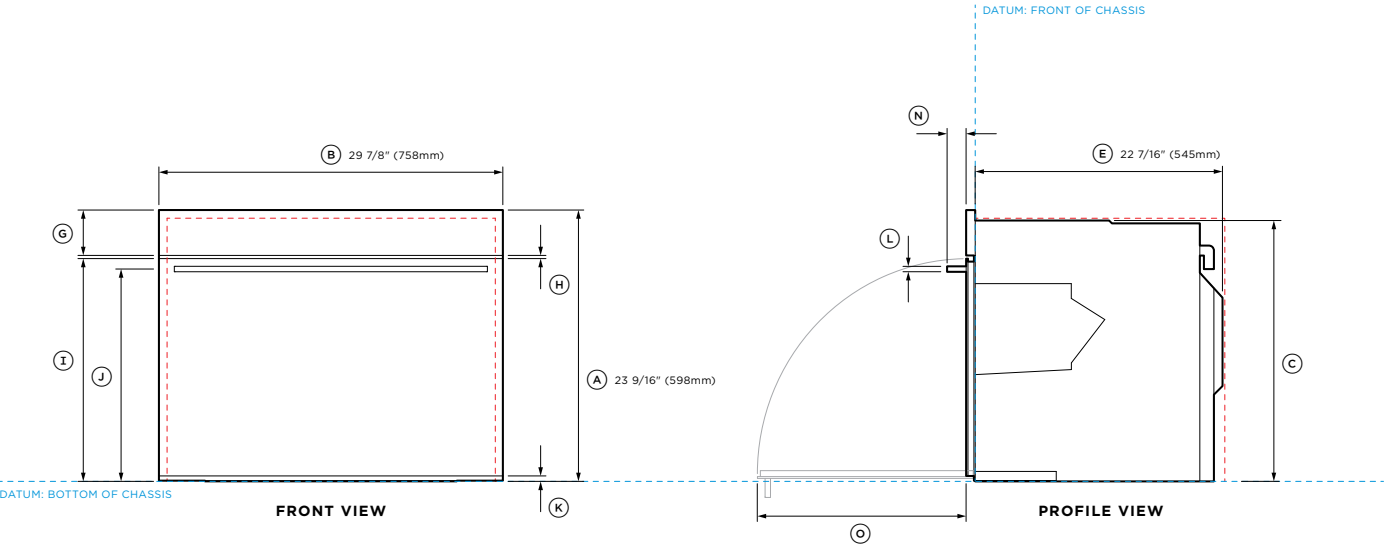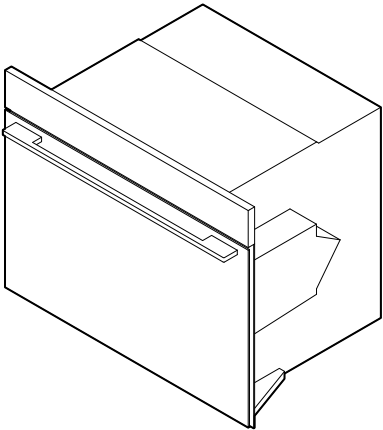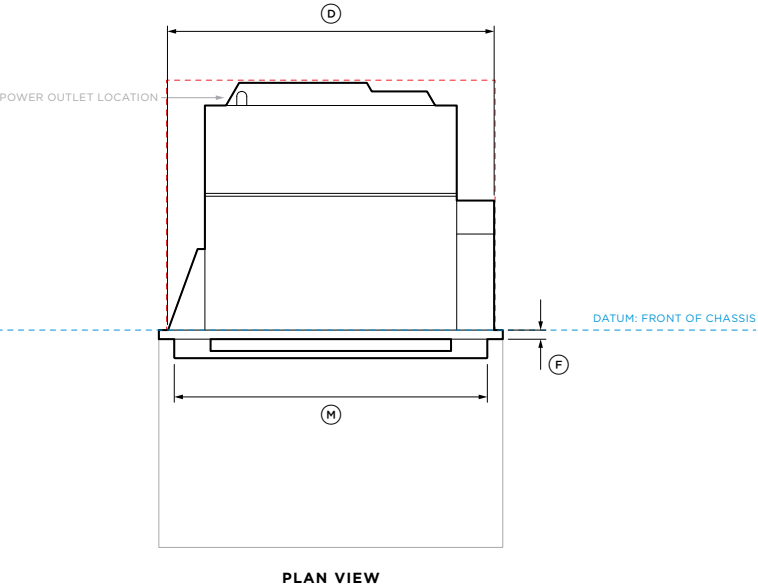

Model no:		
OS30SMUB3	30" Series 11 Minimal Combi-Steam Oven - Black	
OS30SMUG3	30" Series 11 Minimal Combi-Steam Oven - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	23 9/16	598
(B) Overall width of product	29 7/8	758
(C) Height of chassis	22 5/8	575
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	22 7/16	545
(F) Thickness of control panel (excludes handle)	18 1/8	20
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	19 5/16	491
(J) Height from bottom datum to centerline of handle	18 7/16	468
(K) Visual gap height	15/32	12
(L) Thickness of handle	15/32	12
(M) Width of handle	27 5/32	690
(N) Depth of handle	1 21/32	42
(O) Depth with door fully open*	18 1/8	460





*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	22 13/16	580
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	24	600
Recommended cabinet width	30	762

*Measured from front of chassis.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

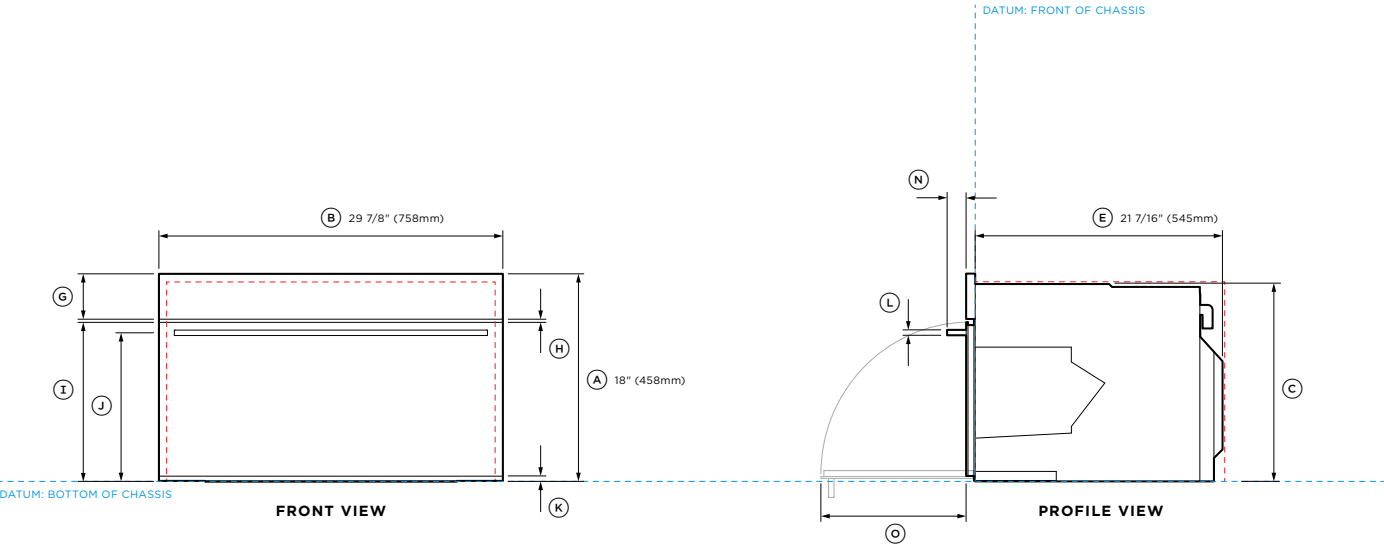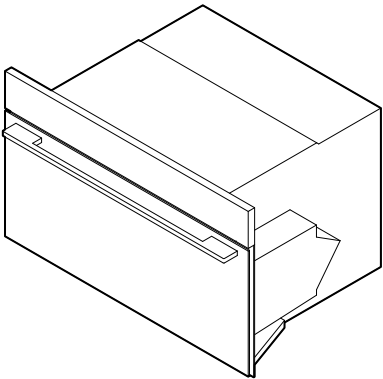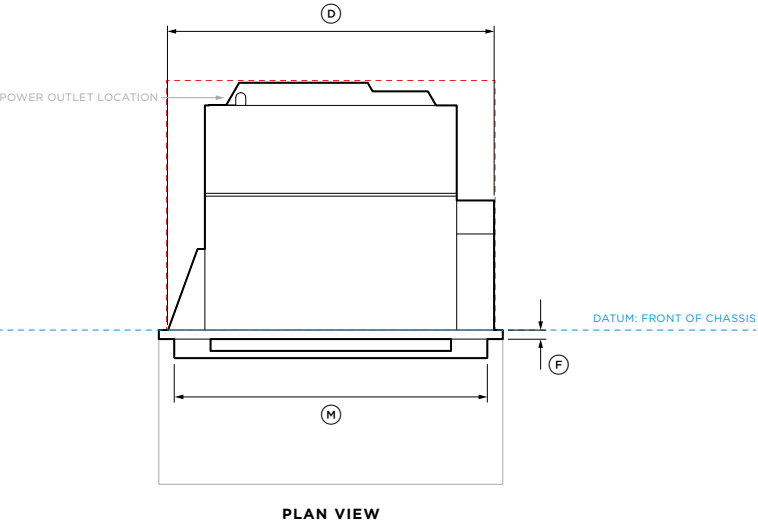

Model no:		
OS30NMUB3	30" Series 9 Minimal Compact Combi-Steam Oven - Black	
OS30NMUG3	30" Series 9 Minimal Compact Combi-Steam Oven - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	18	458
(B) Overall width of product	29 7/8	758
(C) Height of chassis	17 1/8	435
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	21 7/16	545
(F) Thickness of control panel (excludes handle)	13/16	20
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	13 13/16	351
(J) Height from bottom datum to centerline of handle	12 29/32	328
(K) Visual gap height	15/32	12
(L) Thickness of handle	15/32	12
(M) Width of handle	27 5/32	690
(N) Depth of handle	1 21/32	42
(O) Depth with door fully open*	12 5/8	320




*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

*Measured from front of chassis.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

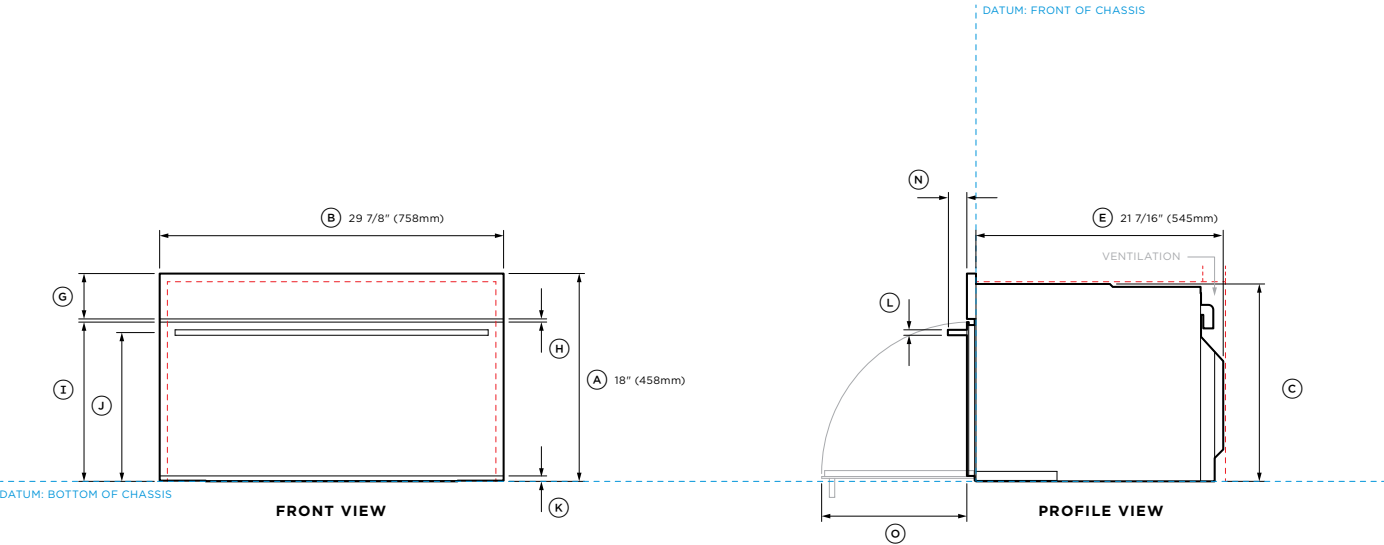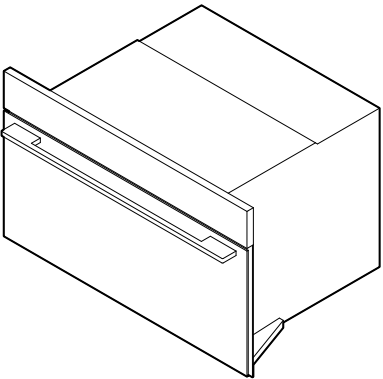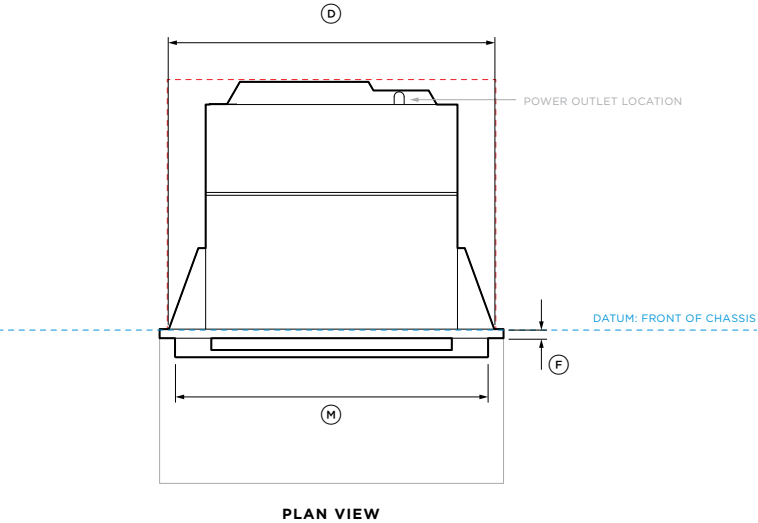

Model no:	
OM30NMUB3	30" Series 9 Minimal Compact Convection-Speed Oven - Black
OM30NMUG3	30" Series 9 Minimal Compact Convection-Speed Oven - Grey


Product Dimensions	inch	mm
A Overall height of product	18	458
B Overall width of product	29 7/8	758
C Height of chassis	17 1/8	435
D Width of chassis	28 3/8	720
E Depth of chassis	21 7/16	545
F Thickness of control panel (excludes handle)	13/16	20
G Height of control panel	3 15/16	100
H Gap between door and control panel	9/32	7
I Height from bottom datum to top of door	13 13/16	351
J Height from bottom datum to centerline of handle	12 29/32	328
K Visual gap height	15/32	12
L Thickness of handle	15/32	12
M Width of handle	27 5/32	690
N Depth of handle	1 21/32	42
O Depth with door fully open*	12 5/8	320

*Measured from front of control panel.		
Minimum Clearances	inch	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

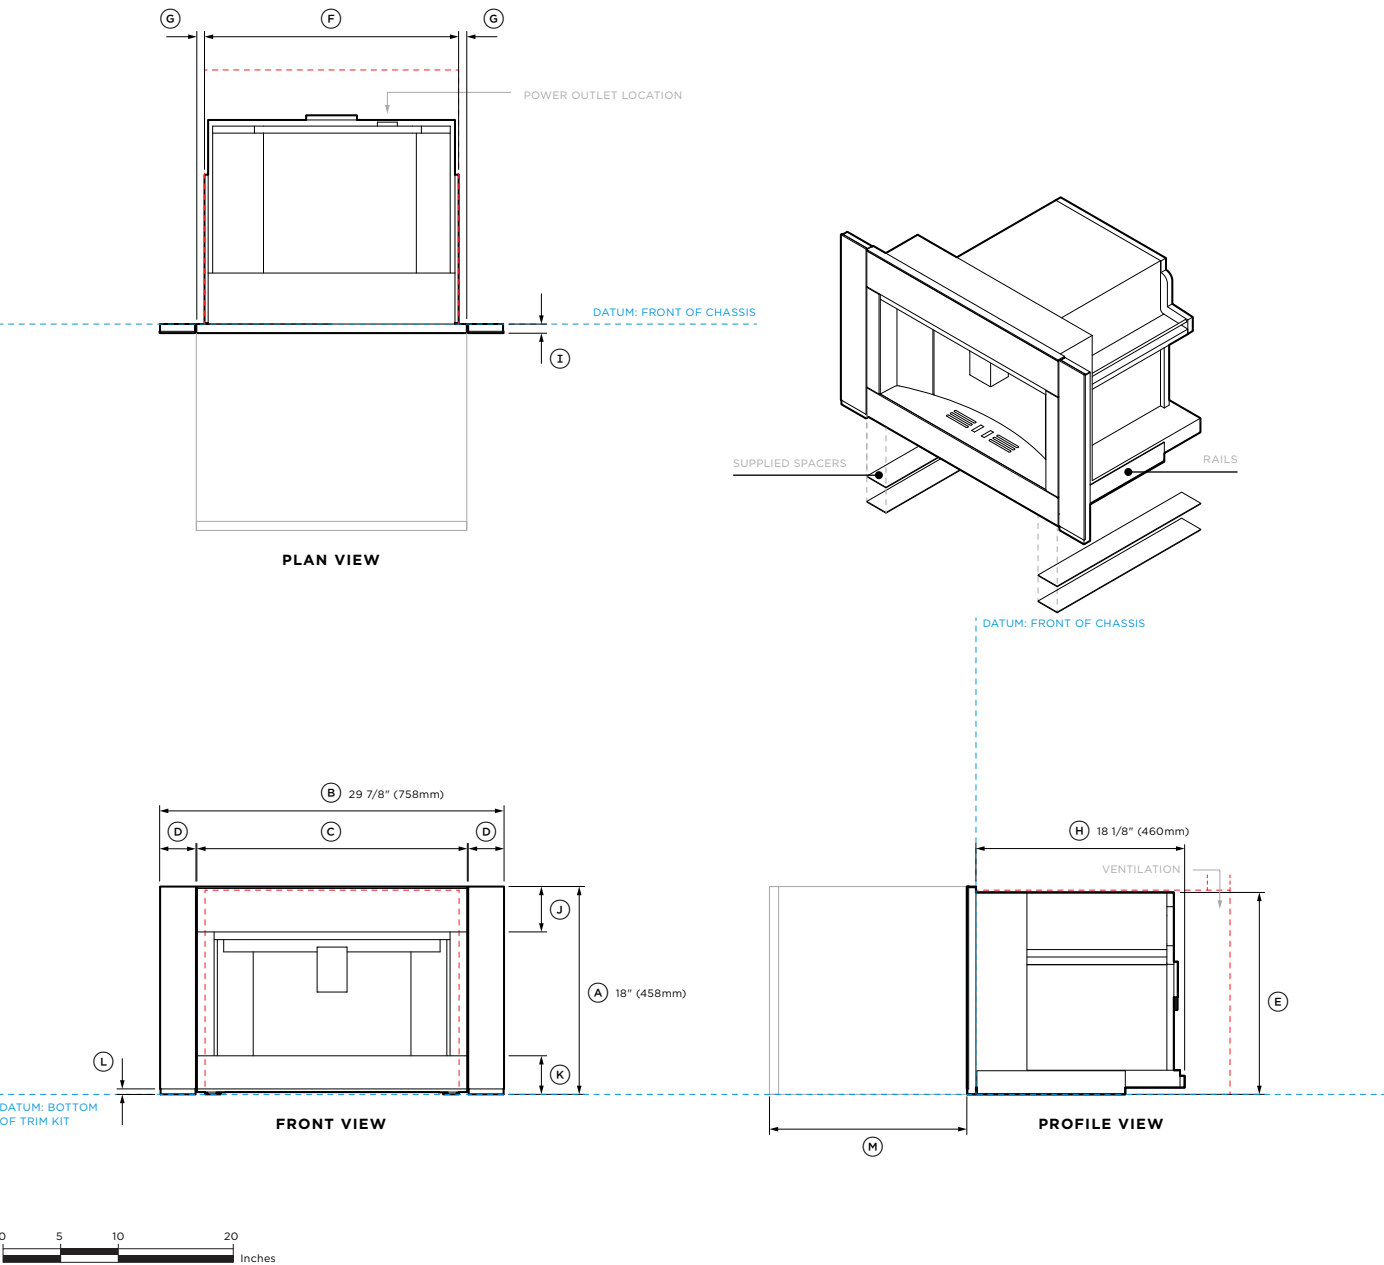


Model no:		
EB30MSB3	30" Series 9 Minimal Built-in Coffee Maker - Black	

Product Dimensions		inch	mm
A	Overall height of product	18	458
B	Overall width of product	29 7/8	758
C	Width of built-in coffee maker	23 15/32	596
D	Width of trim kit	3 1/8	79
E	Height of chassis	17 1/2	445
F	Width of chassis	22 1/16	560
G	Distance from side of chassis to front panel	23/32	18
H	Depth of chassis	18 1/8	460
I	Thickness of control panel	13/16	20
J	Height of control panel	3 15/16	100
K	Height of horizontal lower section from bottom datum	3 11/32	85
L	Visual gap height	15/32	12
M	Depth of built-in coffee maker fully pulled out*	17 1/8	435
*Measured from front of control panel.			
Minimum Clearances		inch	mm
Minimum inside height of cavity		17 3/4	450
Minimum inside width of cavity*		22 1/16	560
Minimum inside depth of cavity**		22 1/16	560
Rear ventilation height***		2	50
Rear ventilation width***		22 1/16	560
Minimum clearance above products control panel to upper cabinetry front panel or appliance		1/16	2
Minimum clearance between adjacent front panel or appliance		1/16	2
Recommended cabinet height		18 1/8	460
Recommended cabinet width		30	762

*Cabinetry requires additional vertical sidewalls to secure the product.
**Measured from front of chassis.
***A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

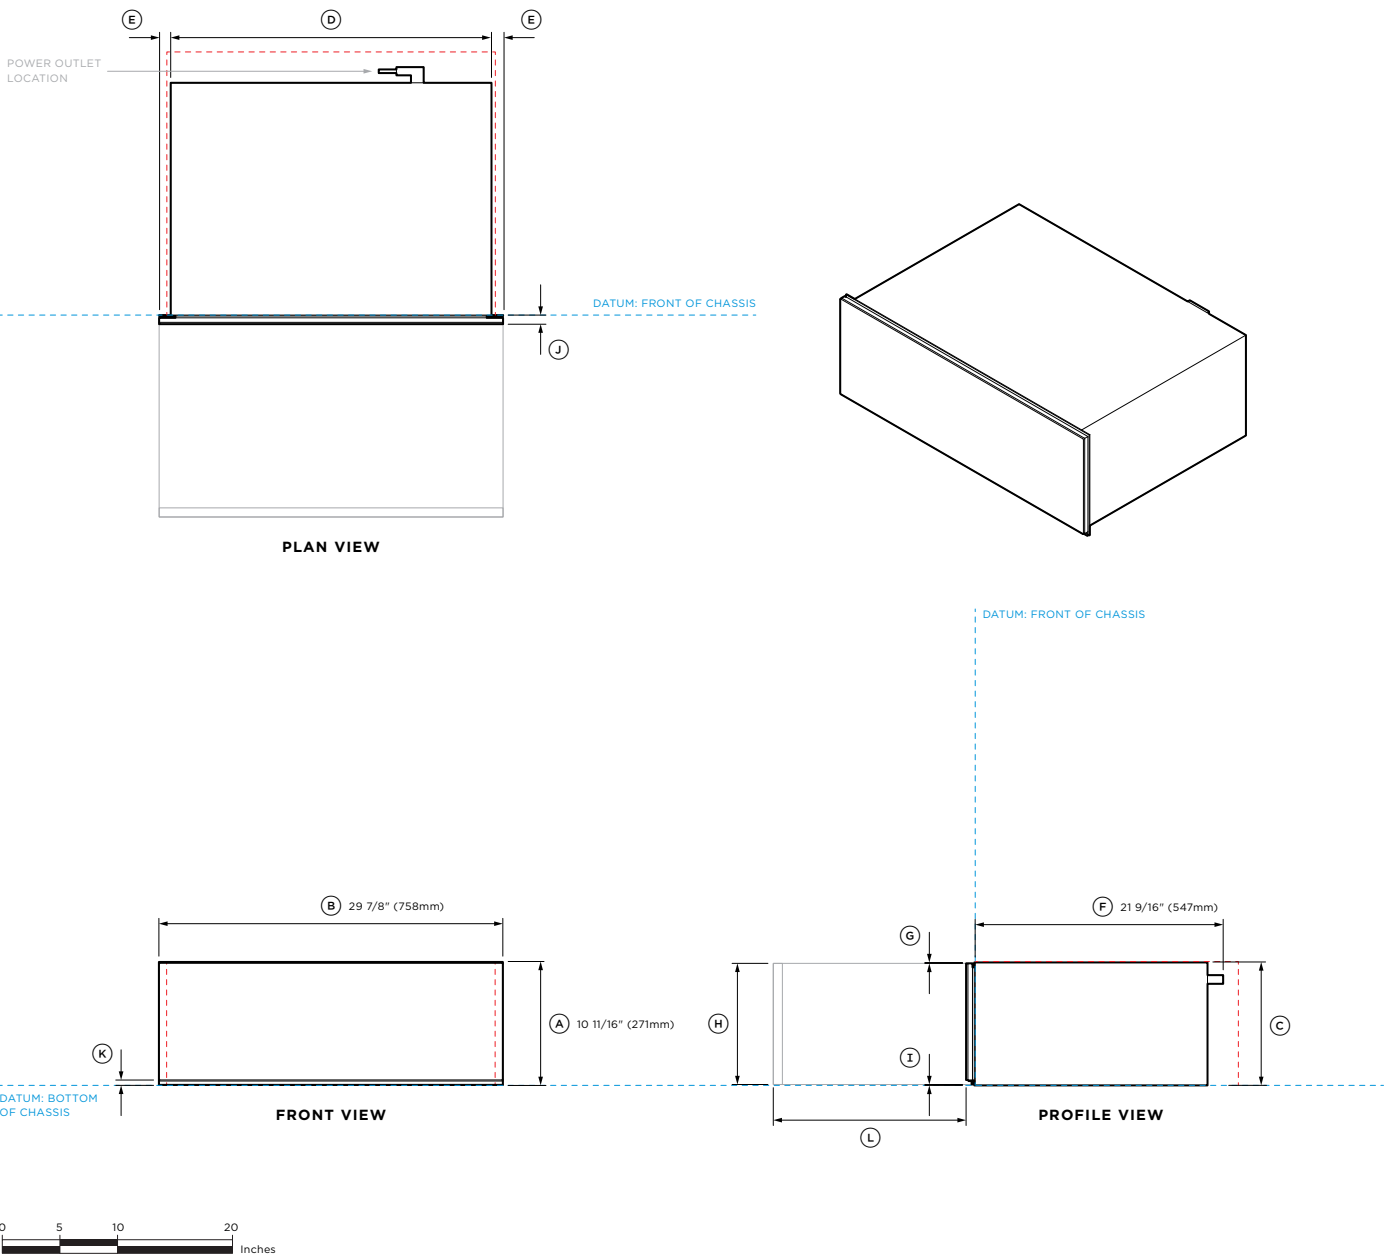

Model no:		
WB30SMB3	30" Series 9 Minimal Warming Drawer - Black	
WB30SMG3	30" Series 9 Minimal Warming Drawer - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Height of chassis	10 11/16	271
(D) Width of chassis	27 3/4	704
(E) Distance from side of chassis to front panel	1	25.5
(F) Depth of chassis (including power plug)	21 9/16	547
(G) Height from top of front panel to top of chassis	1/16	2
(H) Height of front panel	10 1/2	267
(I) Height from bottom datum to bottom of front panel	1/16	2
(J) Thickness of front panel	13/16	20
(K) Visual gap height	15/32	12
(L) Depth of drawer open*	16 3/4	425

*Measured from front of front panel.


Minimum Clearances	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 13/16	580
Minimum clearance above products front panel to upper cabinetry front panel or appliance**	5/32	4
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762

*Measured from front of chassis.


**Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

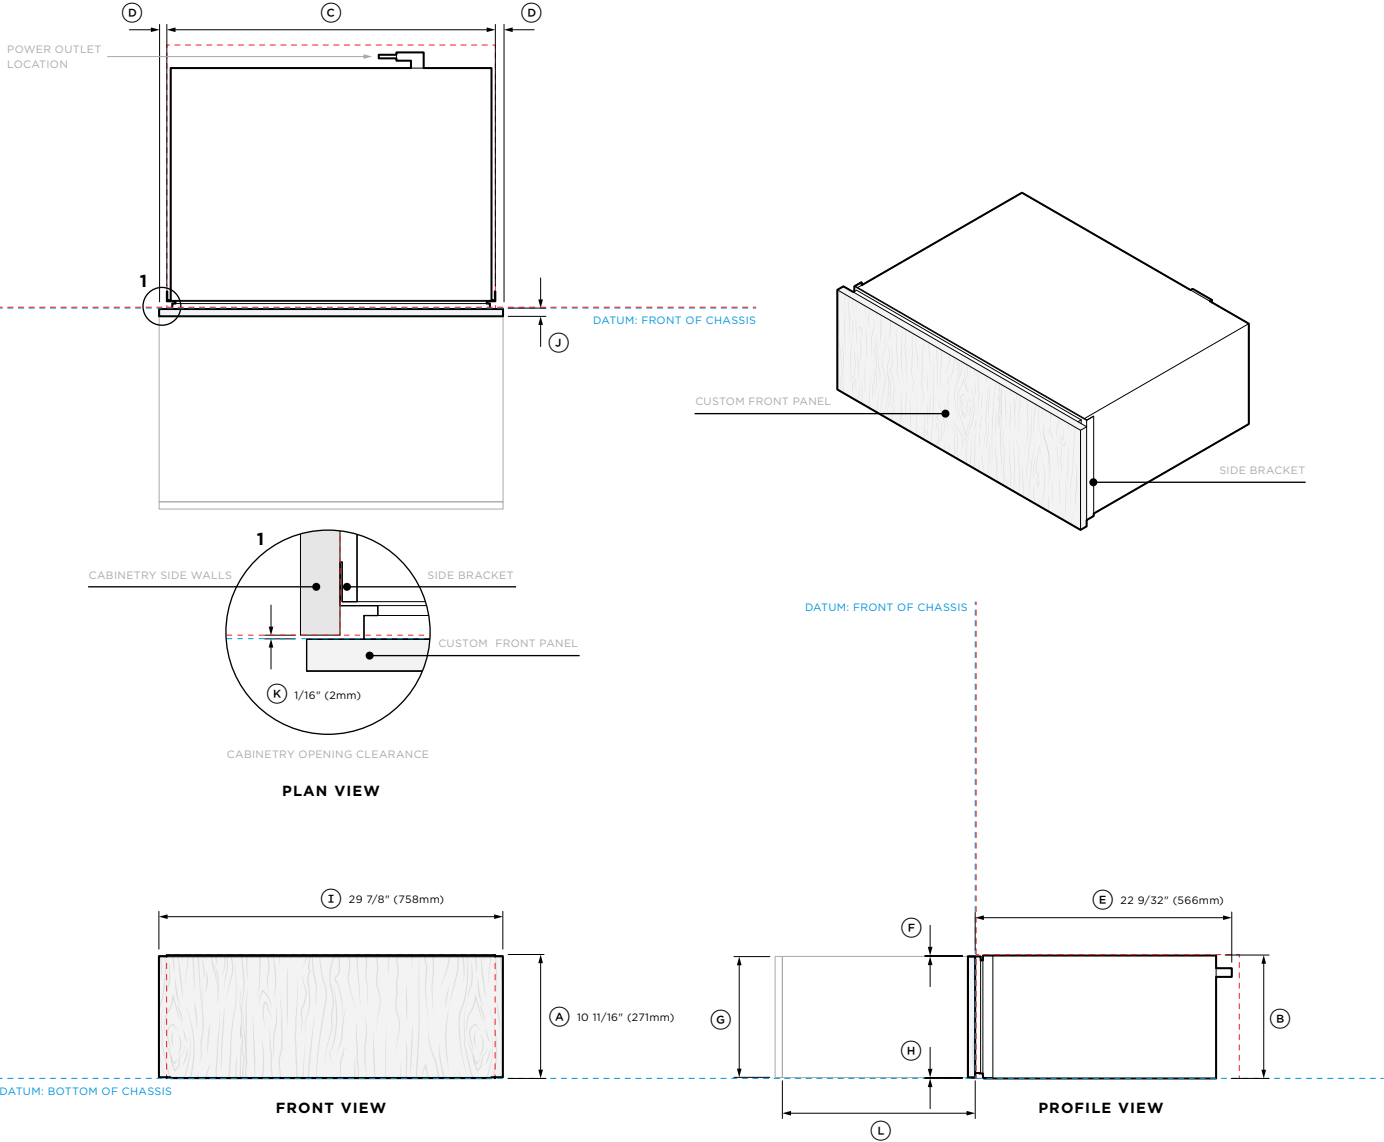

Model no:		
WB30SDEI3 30" Series 9 Integrated Warming Drawer		
Product Dimensions		
	inch	mm
A Overall height of product	10 11/16	271
B Height of chassis	10 11/16	271
C Width of chassis (including side bracket)	28 15/32	723
D Distance from side bracket to custom front panel	11/16	17
E Depth of chassis (including power plug)	22 9/32	566
F Height from top of custom front panel to top of chassis	1/16	2
G Height of custom front panel	min 10 1/2	min 267
H Height from bottom datum to bottom of custom front panel	1/16	2
I Width of custom front panel	min 29 7/8	min 758
J Thickness of custom front panel	min 5/8	min 16
K Clearance behind custom front panel for push-to-open mechanism*	1/16	2
L Depth of drawer open**	16 3/4	425
*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
**Measured from front of chassis.		
Note: Maximum custom front panel weight 11 lb (5kg).		
Minimum Clearances		
	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 13/16	580
Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762
*Measured from front of chassis.		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		
----- INDICATES PRODUCT DATUM		
----- INDICATES CABINETY CLEARANCES		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com		

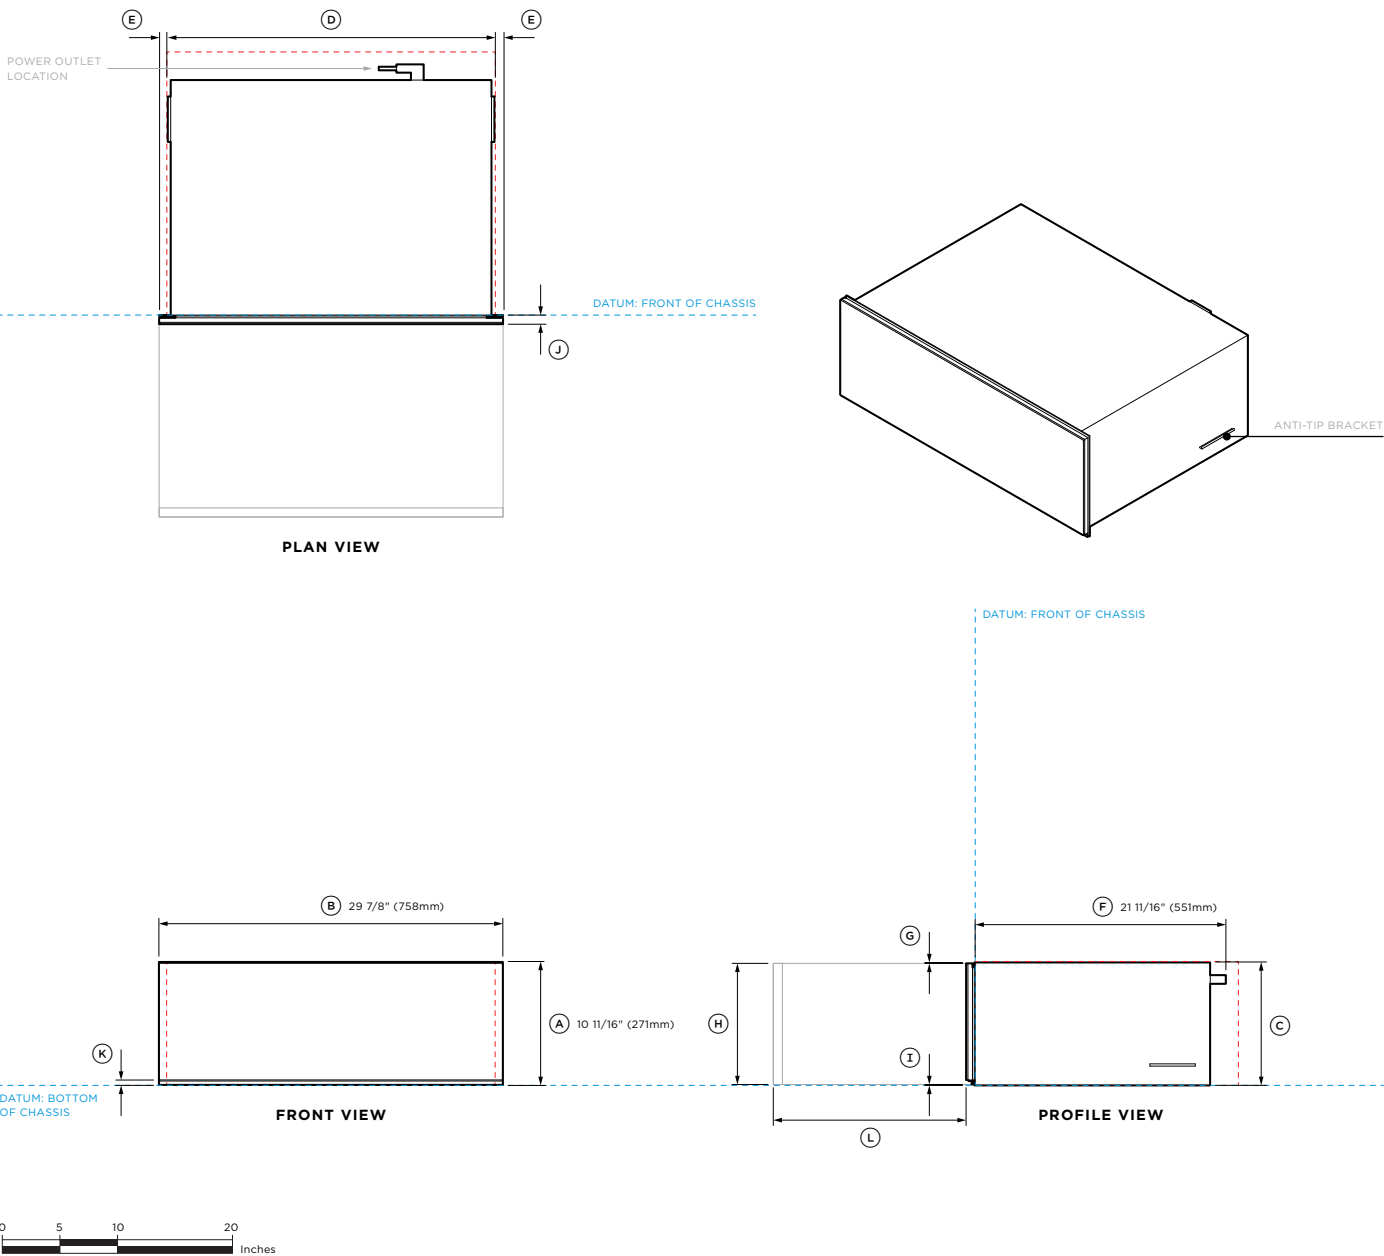

Model no:		
VB30SMB3	30" Series 9 Minimal Vacuum Seal Drawer - Black	
VB30SMG3	30" Series 9 Minimal Vacuum Seal Drawer - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Height of chassis	10 11/16	271
(D) Width of chassis*	27 3/4	704
(E) Distance from side of chassis to front panel	11/16	17
(F) Depth of chassis (including power plug)	21 11/16	551
(G) Height from top of front panel to top of chassis	1/16	2
(H) Height of front panel	10 1/2	267
(I) Height from bottom datum to bottom of front panel	1/16	2
(J) Thickness of front panel	13/16	20
(K) Visual gap height	15/32	12
(L) Depth of drawer open**	16 3/4	425

*Including anti-tip brackets.
**Measured from front of front panel.


Minimum Clearances	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity*	28 1/2	724
Minimum inside depth of cavity**	22 13/16	580
Minimum clearance above products front panel to upper cabinetry front panel or appliance***	5/32	4
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762

*Including anti-tip brackets.
**Measured from front of chassis.
***Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://www.fisherpaykel.com)

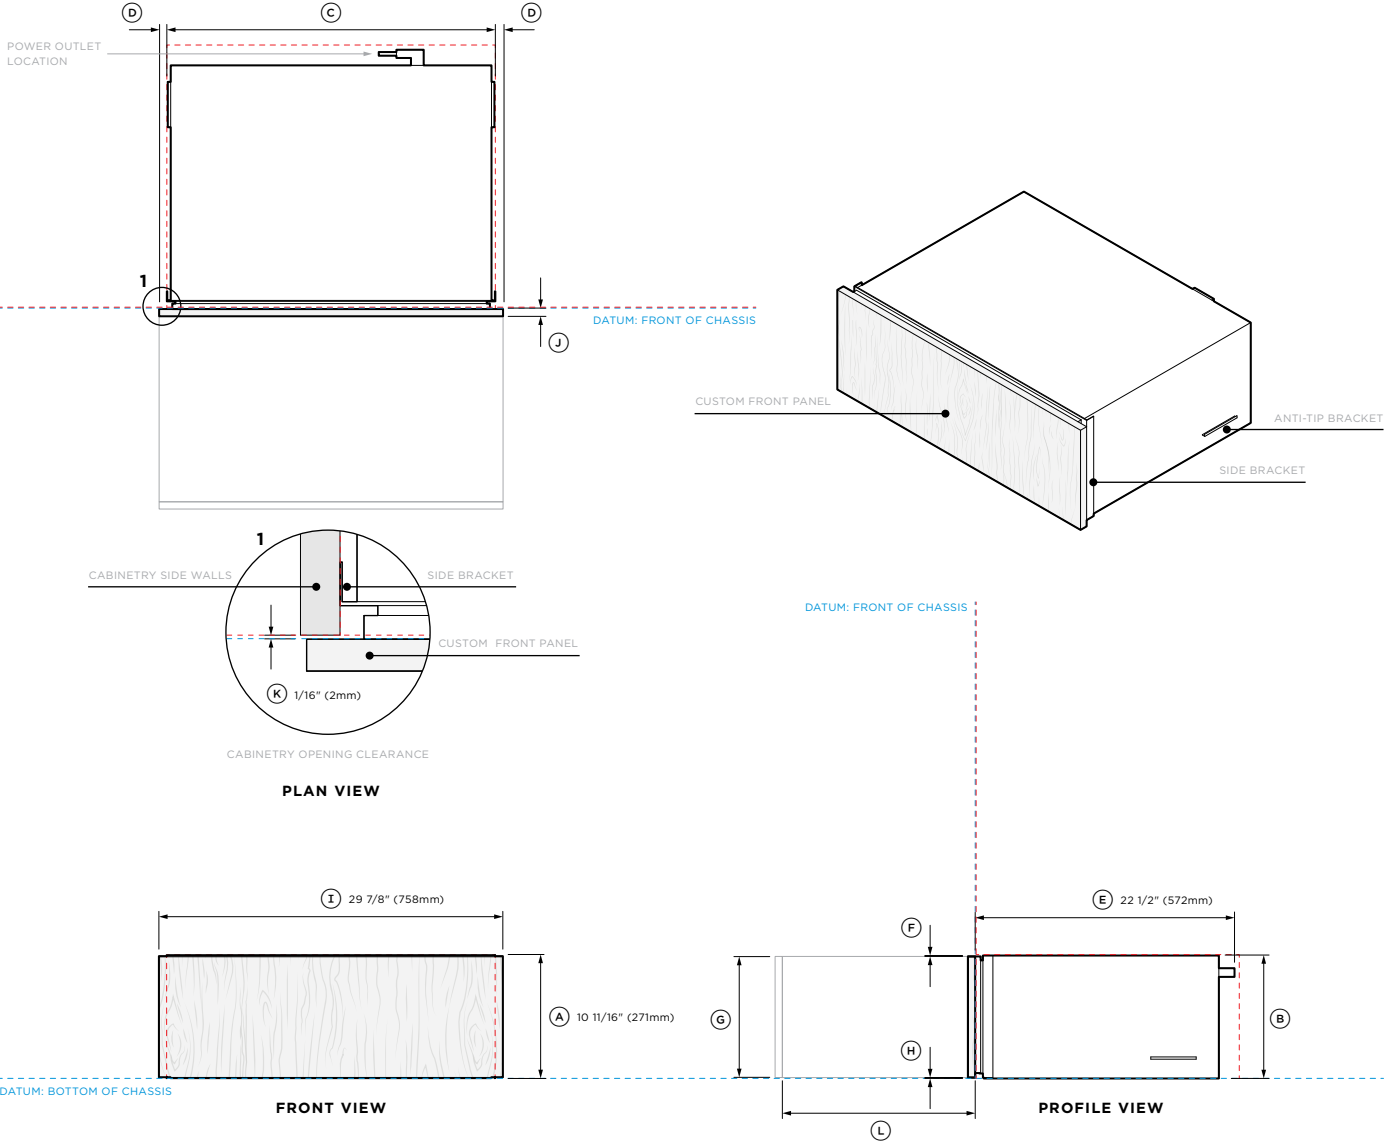

Model no:		
VB30SDEI3 30" Series 9 Integrated Vacuum Seal Drawer		
Product Dimensions		
(A) Overall height of product	10 11/16	271
(B) Height of chassis	10 11/16	271
(C) Width of chassis (including side bracket)*	28 15/32	723
(D) Distance from side bracket to custom front panel	11/16	17
(E) Depth of chassis (including power plug)	22 1/2	572
(F) Height from top of custom front panel to top of chassis	1/16	2
(G) Height of custom front panel	min 10 1/2	min 267
(H) Height from bottom datum to bottom of custom front panel	1/16	2
(I) Width of custom front panel	min 29 7/8	min 758
(J) Thickness of custom front panel	min 5/8	min 16
(K) Clearance behind custom front panel for push-to-open mechanism**	1/16	2
(L) Depth of drawer open***	16 3/4	425
*Including anti-tip brackets.		
**A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
***Measured from front of chassis.		
Note: Maximum custom front panel weight 11 lb (5kg).		
Minimum Clearances		
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity*	28 1/2	724
Minimum inside depth of cavity**	22 13/16	580
Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762
*Including anti-tip brackets.		
**Measured from front of chassis.		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		
----- INDICATES PRODUCT DATUM		
----- INDICATES CABINETRY CLEARANCES		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com		

PLANNING CONSIDERATIONS

DIVIDING SHELF

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

BLACK CLASHING




Black clashing is recommended on front facing edges and openings where products are located and on side cabinets if cabinet is rebated.

OVEN CABINETRY TRIM

If using light-colored cabinets, we recommend using black cabinetry trim to help hide the cabinetry beneath the front door panel of the appliance. Ensure the trim height does not interfere with any appliances or cabinetry below. Black cabinetry trim is included with ovens.

LEVEL CABINETRY


Check the shelves are level and the side panels are straight.

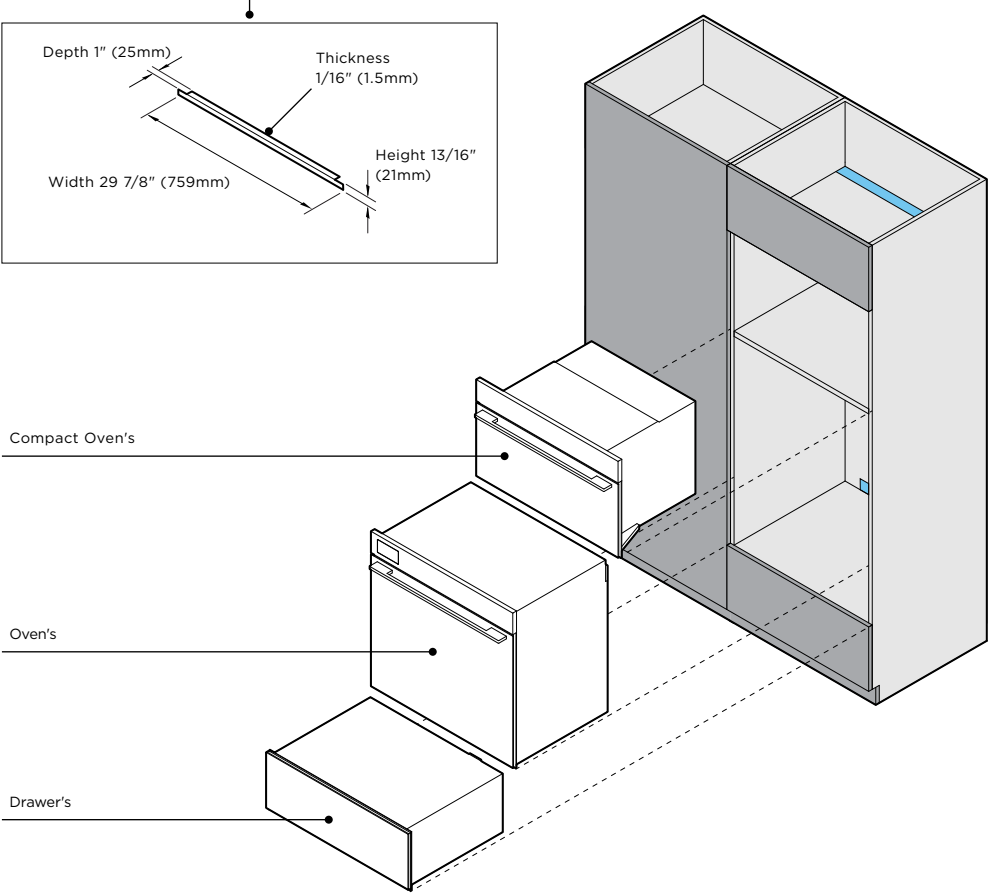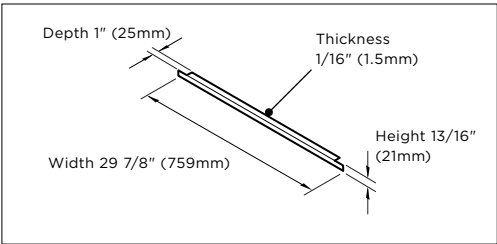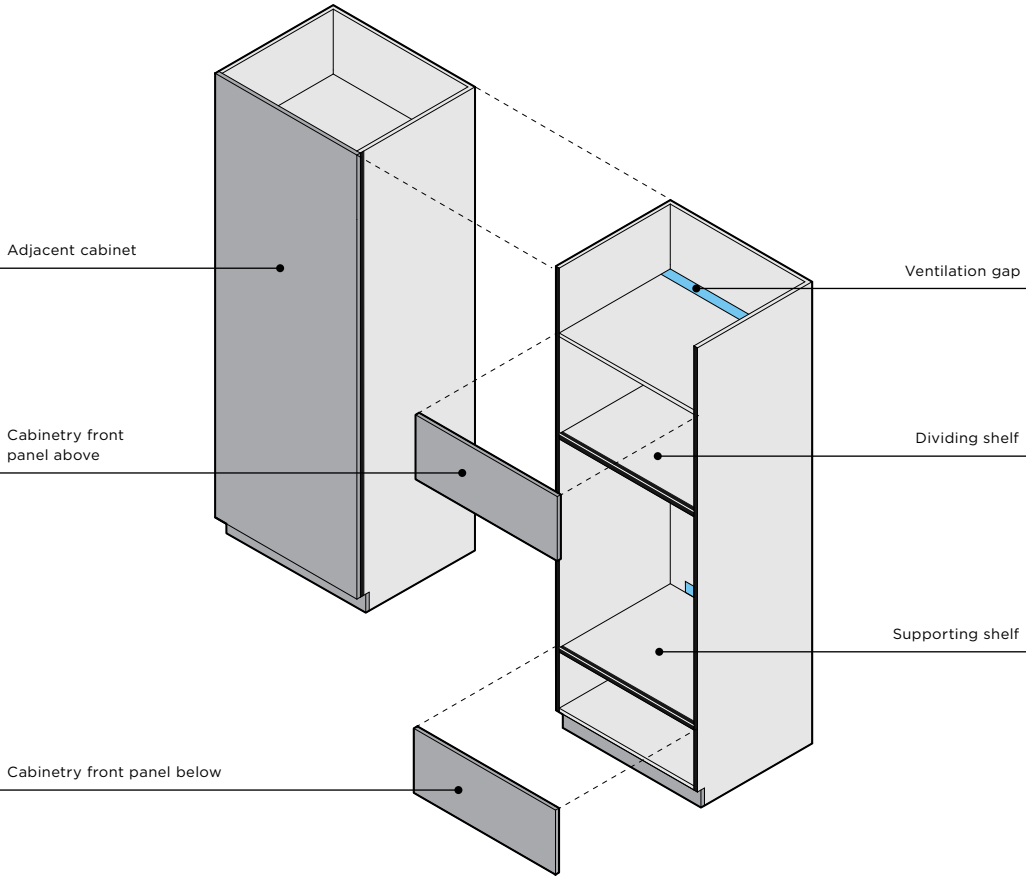

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


UNDERBENCH

If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

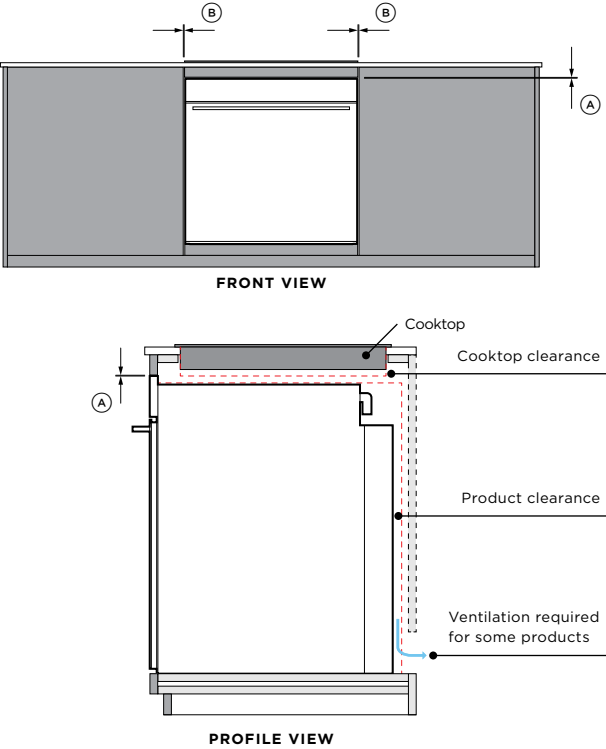


SINGLE INSTALLATION

Head to the individual product 'Cabinetry' section in this Planning Guide for details.

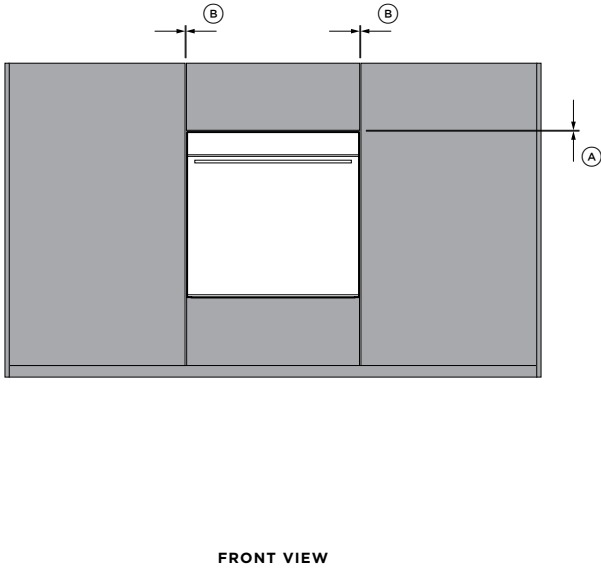


STACKED OR GRID

Head to the 'Stack Height' section in this Planning Guide for details.

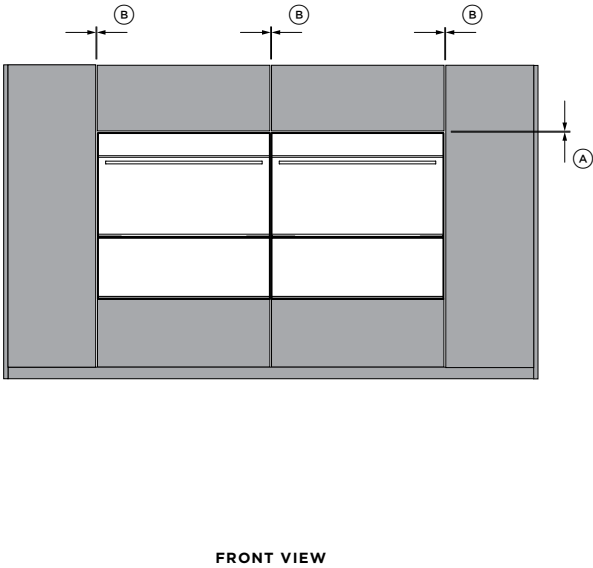

Clearances		inch	mm
A	Minimum clearance above product control panel/front panel to upper cabinetry front panel or appliance	1/16	2
B	Minimum clearance between adjacent front panel or appliance	1/16	2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

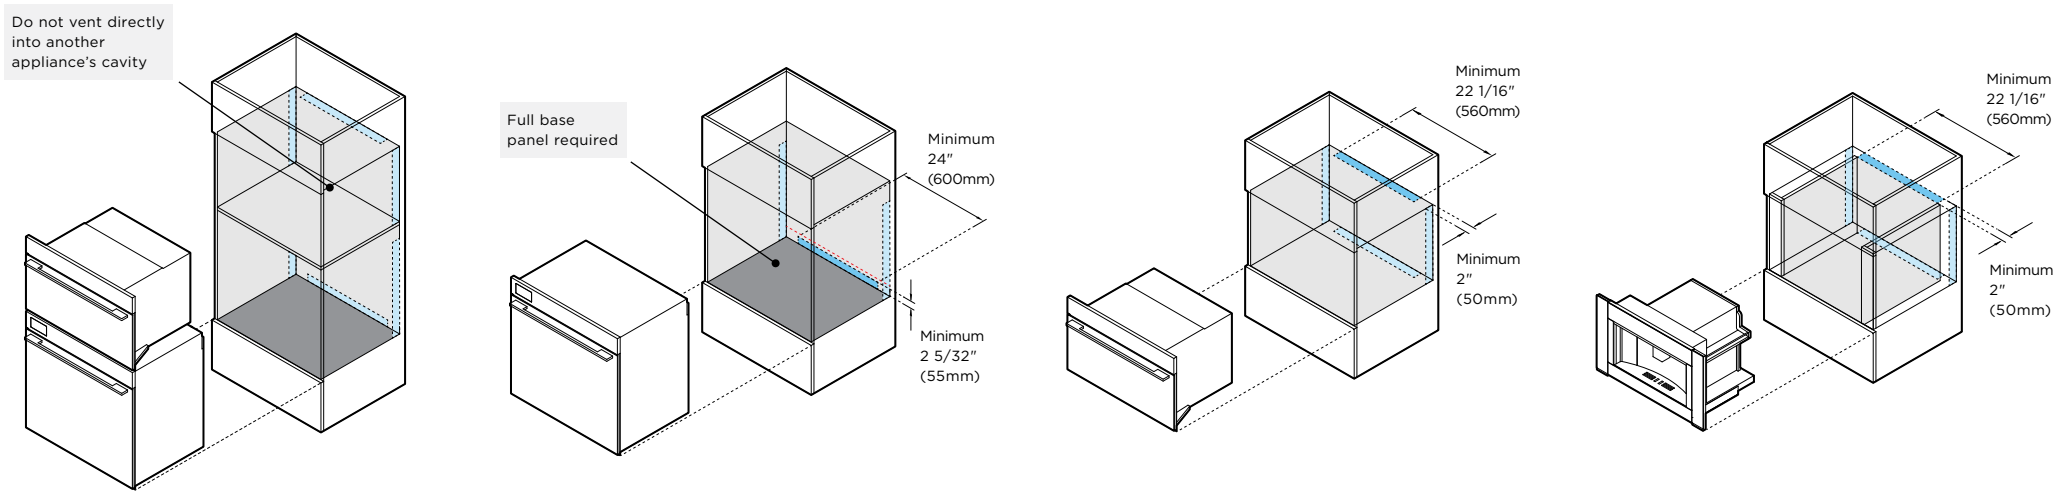

Options for total minimum ventilation area

VENTILATION

Ventilation is required to ensure proper performance of certain products.

Possible Venting Locations:

- Space behind the cabinet
- Upper cavity (not a product cavity)
- Toe kick cavity
- Adjacent cabinetry (not a product cavity)

Cabinet with back panel or installed against a wall:
Select one of the venting locations listed above, providing the required minimum ventilation area.

Cabinet without back panel:
If the cabinet is manufactured without a back panel and is not positioned directly against a wall, the open back will provide sufficient ventilation.

Do not vent directly into another appliance's cavity.

SELF-CLEANING OVEN AND
SELF-CLEANING STEAM ASSIST OVEN

OB30SMPUB3, OB30SMPUG3, OB30SMPSUB3,
OB30SMPSUG3

VENTILATION PLACEMENT

	51in ² (330cm ²)
	or
Total minimum ventilation area	2 5/32" x 24" (55mm x 600mm)

Cavity venting options*	sides or back
-------------------------	---------------

*If positioned at the back, it should be located no more than 3 5/32" (80mm) above the bottom of the chassis datum.

Note: Full base panel required for product to operate correctly. Venting can not be through the base panel.

COMPACT CONVECTION-SPEED OVEN

OM30NMUB3, OM30NMUG3

VENTILATION PLACEMENT

	43.4in ² (280cm ²)
	or
Total minimum ventilation area	2" x 22 1/16" (50mm x 560mm)

Cavity venting options	base, sides or top
------------------------	--------------------

BUILT-IN COFFEE MAKER

EB30MSB3

VENTILATION PLACEMENT

	43.4in ² (280cm ²)
	or
Total minimum ventilation area	2" x 22 1/16" (50mm x 560mm)

Cavity venting options	base, sides or top
------------------------	--------------------

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

STACK HEIGHT

Stack height is overall product height with minimum clearance above appliance control panel or front panel.

A Overall product height


+

B Minimum clearance above appliance control panel or front panel to upper appliance

=


C Stacked Height

1



B

PROFILE VIEW

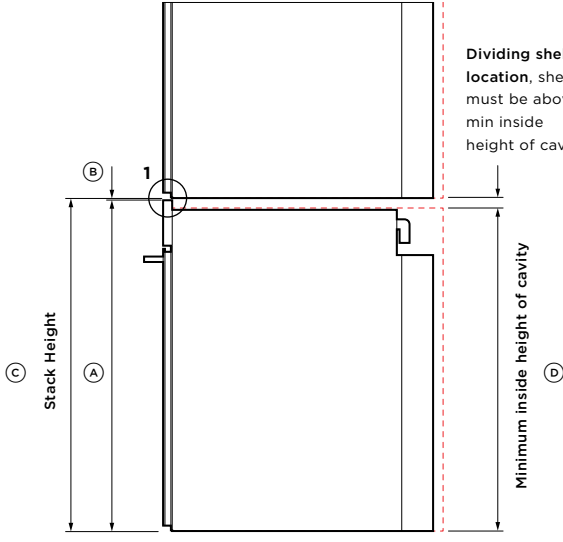

Stack Height

A

B

C

1

Dividing shelf location, shelf must be above min inside height of cavity.

Minimum inside height of cavity

D


PROFILE VIEW

Ventilation air vent is required at rear of cabinetry for some products.

Dividing shelves are required to support stacked appliances and to achieve correct clearance.

Dividing shelves must be constructed from material that will support the weight of the appliances. Ensure the oven is not bearing any weight from cabinetry or products installed above.

Drawers can fully support a 30inch Fisher & Paykel oven, without adding a shelf in between.

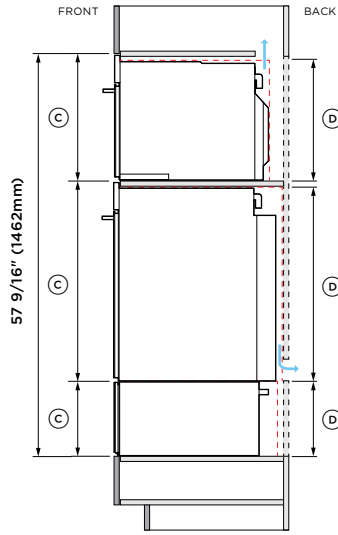

FRONT

BACK


C

D

57 9/16" (1462mm)

PROFILE VIEW

MINIMUM INSIDE HEIGHT OF CAVITY

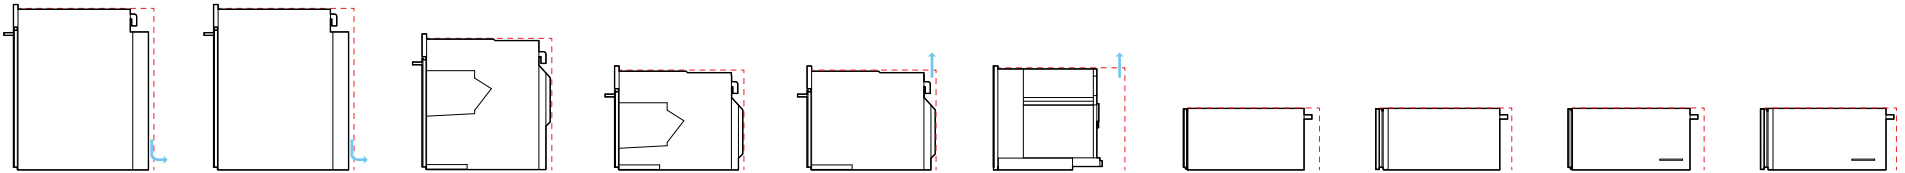

	SELF-CLEANING OVEN OB30SMPUB3, OB30SMPUG3		SELF-CLEANING STEAM ASSIST OVEN OB30SMPSUB3, OB30SMPSUG3		COMBI-STEAM OVEN OS30SMUB3, OS30SMUG3		COMPACT COMBI-STEAM OVEN OS30NMUB3, OS30NMUG3		COMPACT CONVECTION-SPEED OVEN OM30NMUB3, OM30NMUG3		BUILT-IN COFFEE MAKER EB30MSB3		WARMING DRAWER WB30SMB3, WB30SMG3		INTEGRATED WARMING DRAWER WB30SDEI3		VACUUM SEAL DRAWER VB30SMB3, VB30SMG3		INTEGRATED VACUUM SEAL DRAWER VB30SDEI3	
DIMENSIONS	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
A Overall product height	28 11/16	729	28 11/16	729	23 9/16	598	18	458	18	458	18	458	10 11/16	271	10 11/16	271	10 11/16	271	10 11/16	271
B Minimum clearance above	1/16	2	1/16	2	1/16	2	1/16	2	1/16	2	1/16	2	-	-	-	-	-	-	-	-
C Stack height	28 3/4	731	28 3/4	731	24	600	18 1/8	460	18 1/8	460	18 1/8	460	10 11/16*	271*	10 11/16*	271*	10 11/16*	271*	10 11/16*	271*
D Minimum inside height of cavity	28 1/32	712	28 1/32	712	22 13/16	580	17 5/16	440	17 5/16	440	17 3/4	450	-	-	-	-	-	-	-	-

*Drawers can fully support 30inch Fisher & Paykel wall oven, without adding shelf in between. Note: Single installation of Drawers require minimum clearance above, head to individual product 'Cabinetry' section's of this Planning Guide for more details.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FISHER & PAYKEL

90004604B

PLANNING GUIDE 30" OVENS AND COMPANIONS VERSION B - OCTOBER 2025

© FISHER & PAYKEL APPLIANCES LIMITED 2025

PAGE 38

Model no:		
OB30SMPUB3	30" Series 9 Minimal Self-Cleaning Oven - Black	
OB30SMPUG3	30" Series 9 Minimal Self-Cleaning Oven - Grey	

Product Dimensions	inch	mm
A Overall height of product	28 11/16	729
B Overall width of product	29 7/8	758
C Thickness of control panel (excludes handle)	13/16	20


Cabinetry Dimensions	inch	mm
D Recommended cabinet height/stack height	28 3/4	731
E Recommended cabinet width	30	762
F Minimum inside height of cavity	28 1/32	712
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	23 1/2	597
I Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Note: Cabinetry requires a full base panel.

Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

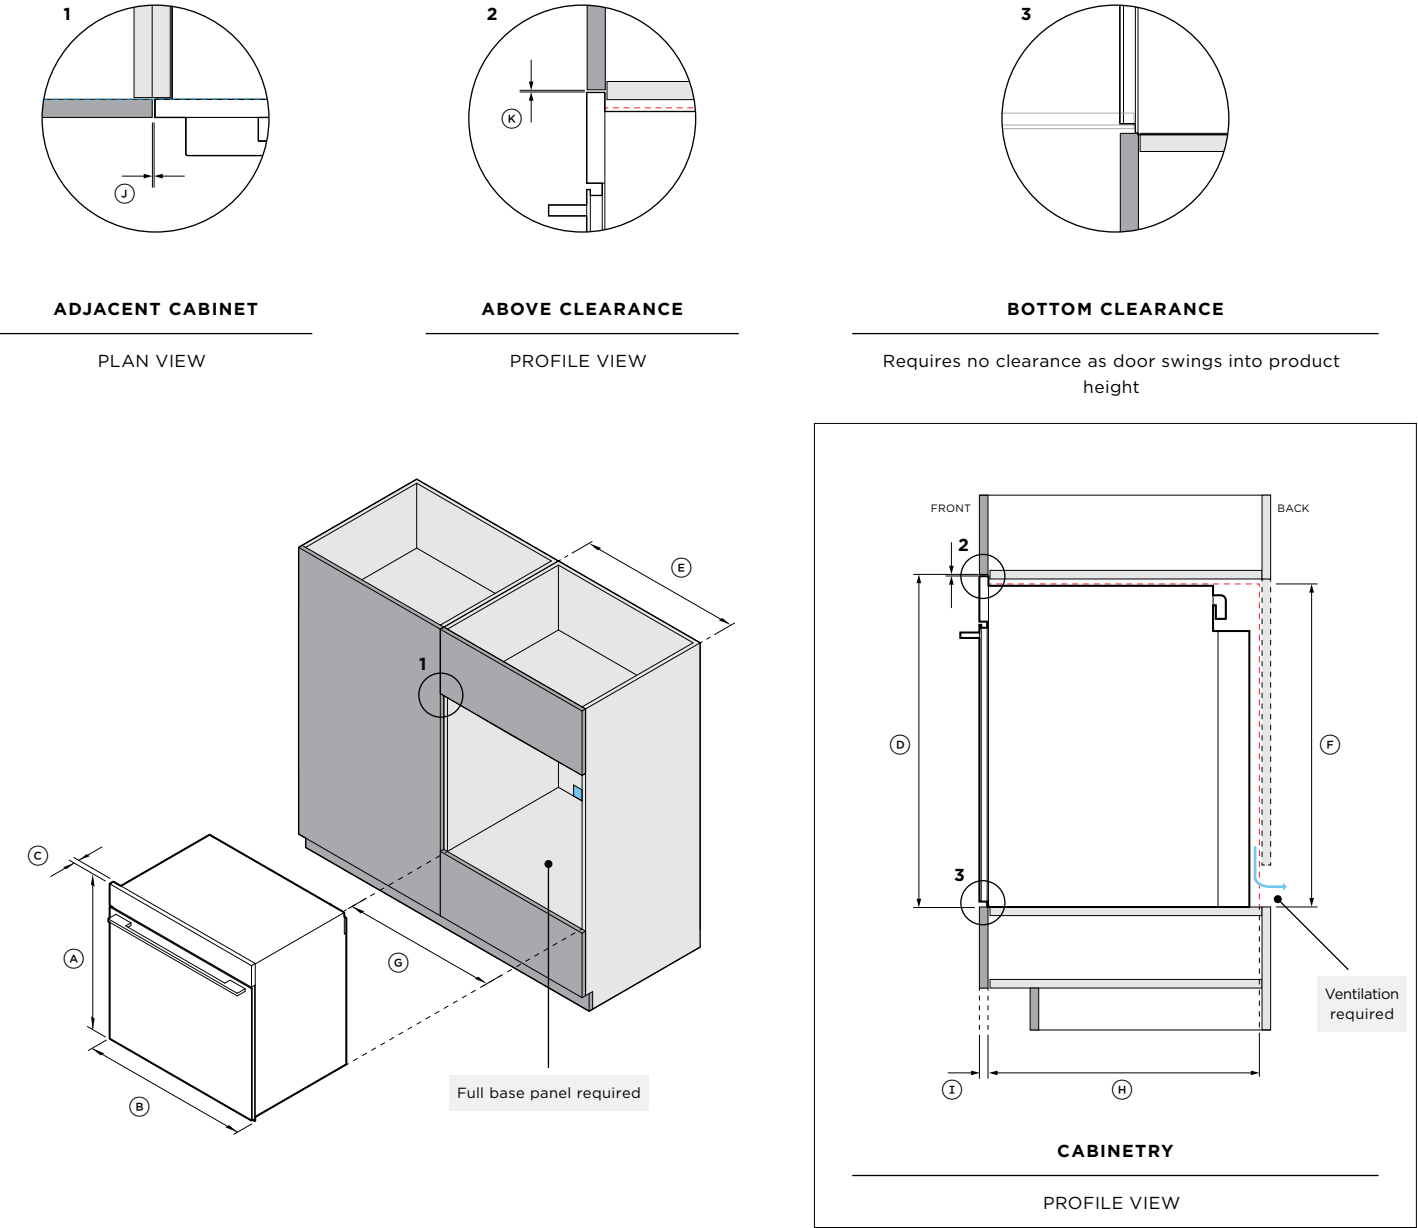

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:	
OB30SMPSUB3	30" Series 11 Minimal Self-Cleaning Steam Assist Oven - Black
OB30SMPSUG3	30" Series 11 Minimal Self-Cleaning Steam Assist Oven - Grey

Product Dimensions	inch	mm
(A) Overall height of product	28 11/16	729
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel (excludes handle)	13/16	20


Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	28 3/4	731
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	28 1/32	712
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	23 1/2	597
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Note: Cabinetry requires a full base panel.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

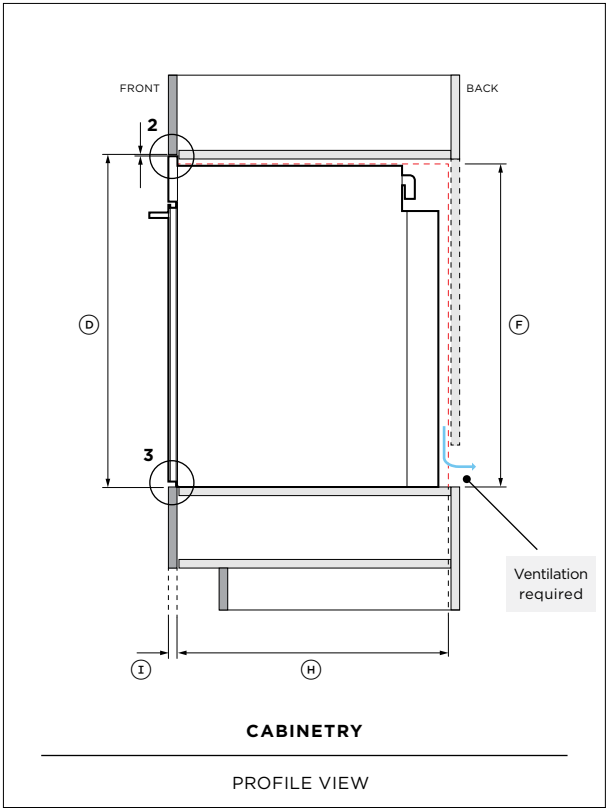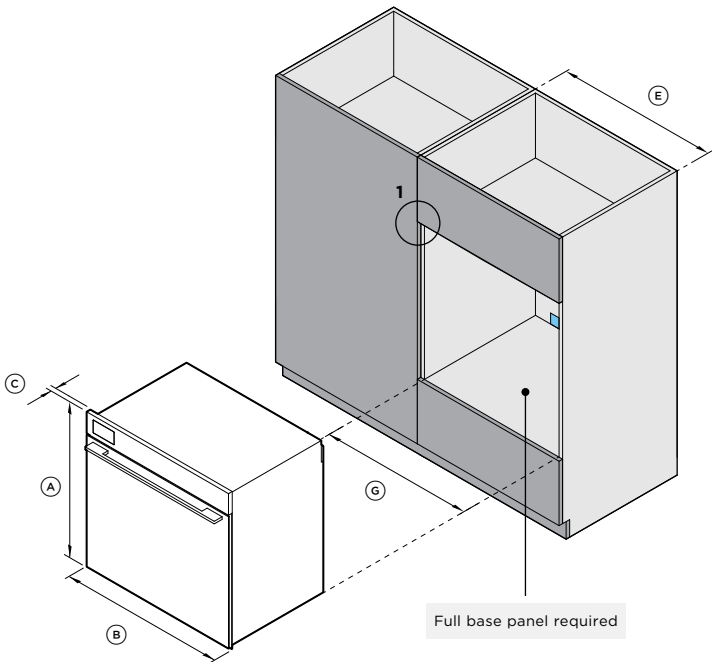

Model no:		
OS30SMUB3	30" Series 11 Minimal Combi-Steam Oven - Black	
OS30SMUG3	30" Series 11 Minimal Combi-Steam Oven - Grey	


Product Dimensions	inch	mm
A Overall height of product	23 9/16	598
B Overall width of product	29 7/8	758
C Thickness of control panel (excludes handle)	13/16	20

Cabinetry Dimensions	inch	mm
D Recommended cabinet height/stack height	24	600
E Recommended cabinet width	30	762
F Minimum inside height of cavity	22 13/16	580
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	21 5/8	550
I Thickness of cabinetry front panel	5/8-13/16	16-20

*Measured from front of chassis.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

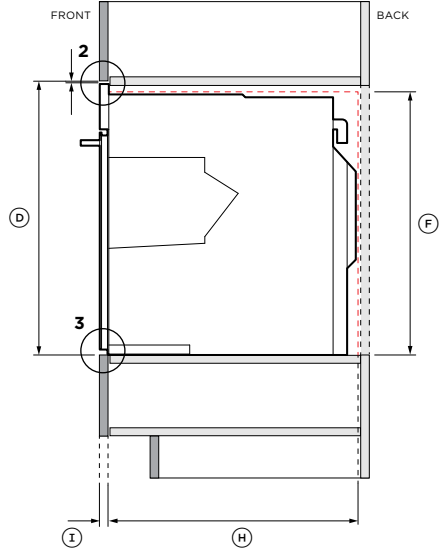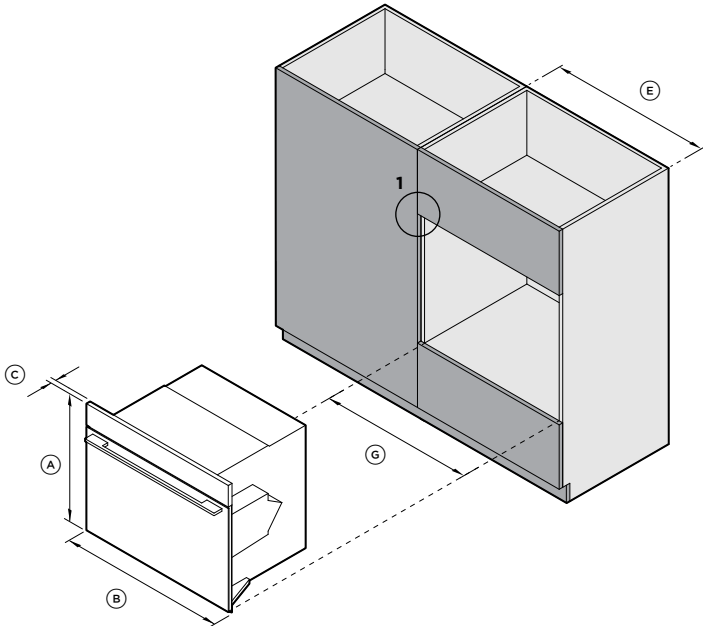

CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:		
OS30NMUB3	30" Series 9 Minimal Compact Combi-Steam Oven - Black	
OS30NMUG3	30" Series 9 Minimal Compact Combi-Steam Oven - Grey	


Product Dimensions	inch	mm
(A) Overall height of product	18	458
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel (excludes handle)	13/16	20

Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	18 1/8	460
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	17 5/16	440
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	21 5/8	550
(I) Thickness of cabinetry front panel	5/8-13/16	16-20

*Measured from front of chassis.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

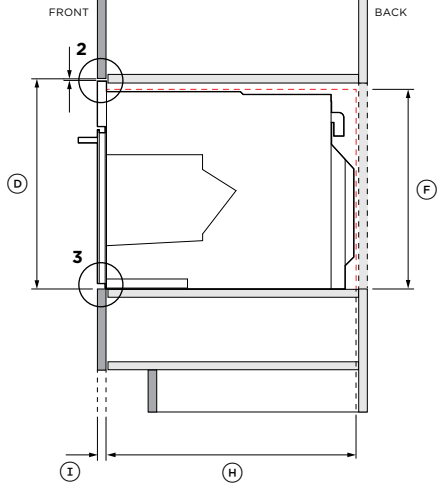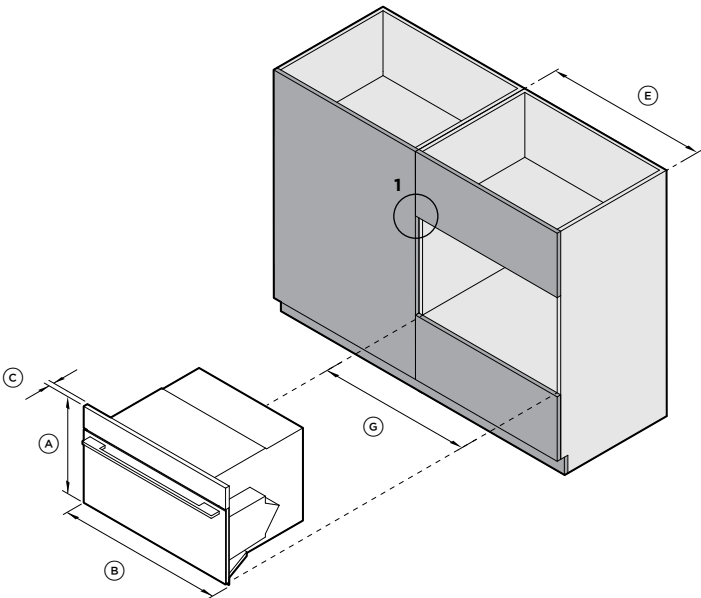

CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
OM30NMUB3	30" Series 9 Minimal Compact Convection-Speed Oven - Black	
OM30NMUG3	30" Series 9 Minimal Compact Convection-Speed Oven - Grey	


Product Dimensions	inch	mm
(A) Overall height of product	18	458
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel (excludes handle)	13/16	20

Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	18 1/8	460
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	17 5/16	440
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	21 5/8	550
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

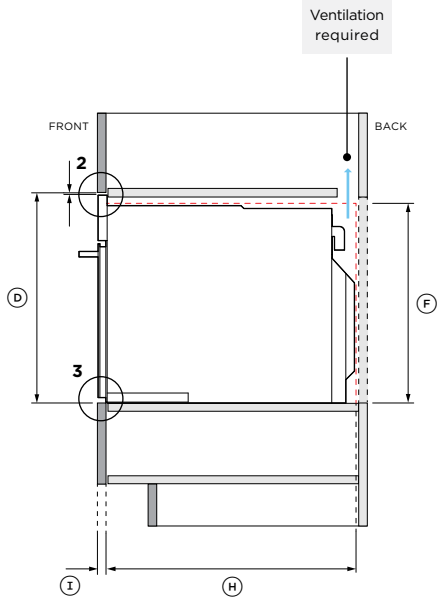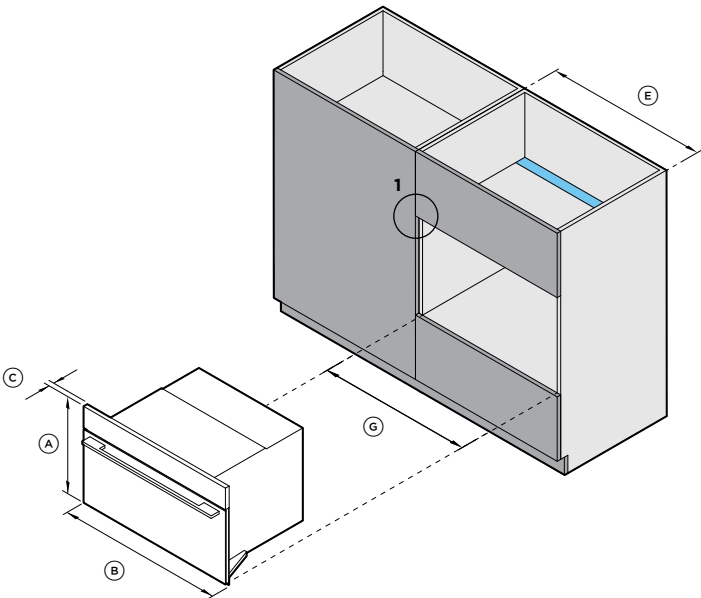

CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:
EB30MSB3 30" Series 9 Minimal Built-in Coffee Maker - Black


Product Dimensions	inch	mm
(A) Overall height of product	18	458
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel	13/16	20

Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	18 1/8	460
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	17 3/4	450
(G) Minimum inside width of cavity	22 1/16	560
(H) Minimum inside depth of cavity*	22 13/16	545
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

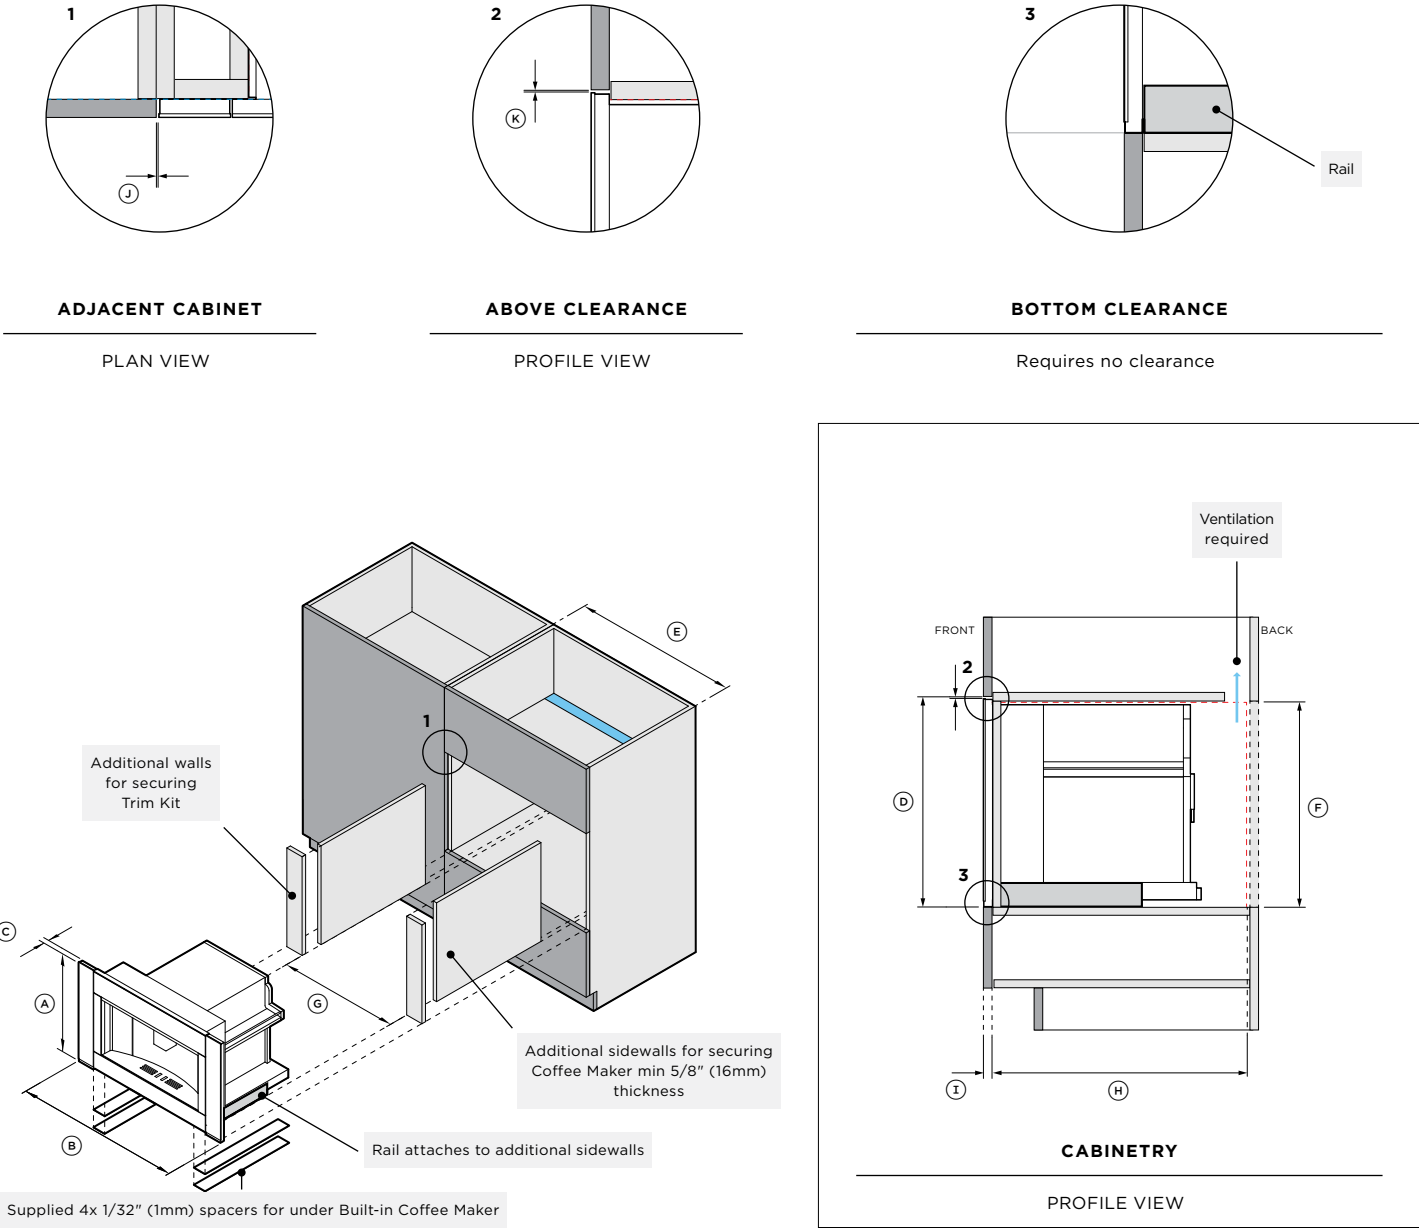

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:		
WB30SMB3	30" Series 9 Minimal Warming Drawer - Black	
WB30SMG3	30" Series 9 Minimal Warming Drawer - Grey	

Product Dimensions	inch	mm
A Overall height of product	10 11/16	271
B Overall width of product	29 7/8	758
C Thickness of front panel	13/16	20

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.


Cabinetry Dimensions	inch	mm
D Recommended cabinet height - single install	10 3/4	273
E Recommended cabinet width	30	762
F Minimum inside height of cavity	10 3/4	273
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	22 13/16	580
I Thickness of cabinetry front panel	5/8-13/16	16-20

*Measured from front of chassis.

Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above products front panel to upper cabinetry front panel or appliance*	5/32	4


*Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance

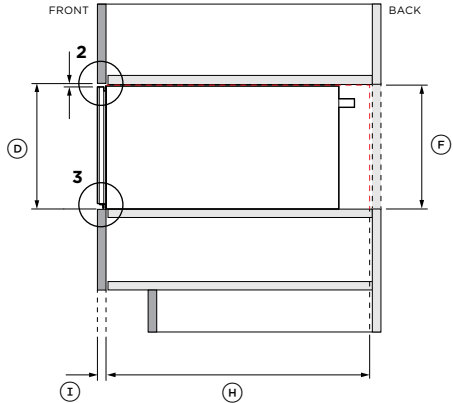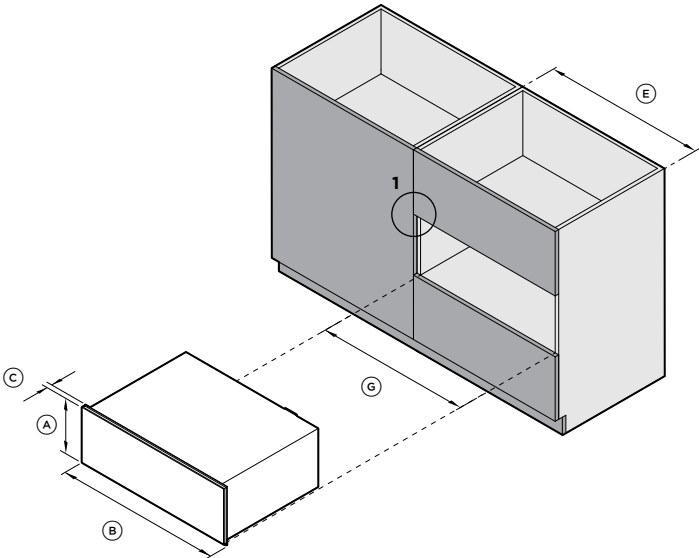


CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
WB30SDEI3 30" Series 9 Integrated Warming Drawer		
Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of custom front panel	min 5/8	min 16
Note: Maximum custom front panel weight 11 lb (5kg).		
Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	22 13/16	580
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
*Measured from front of chassis.		
Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Clearance behind custom front panel for push-to-open mechanism*	1/16	2
(L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		

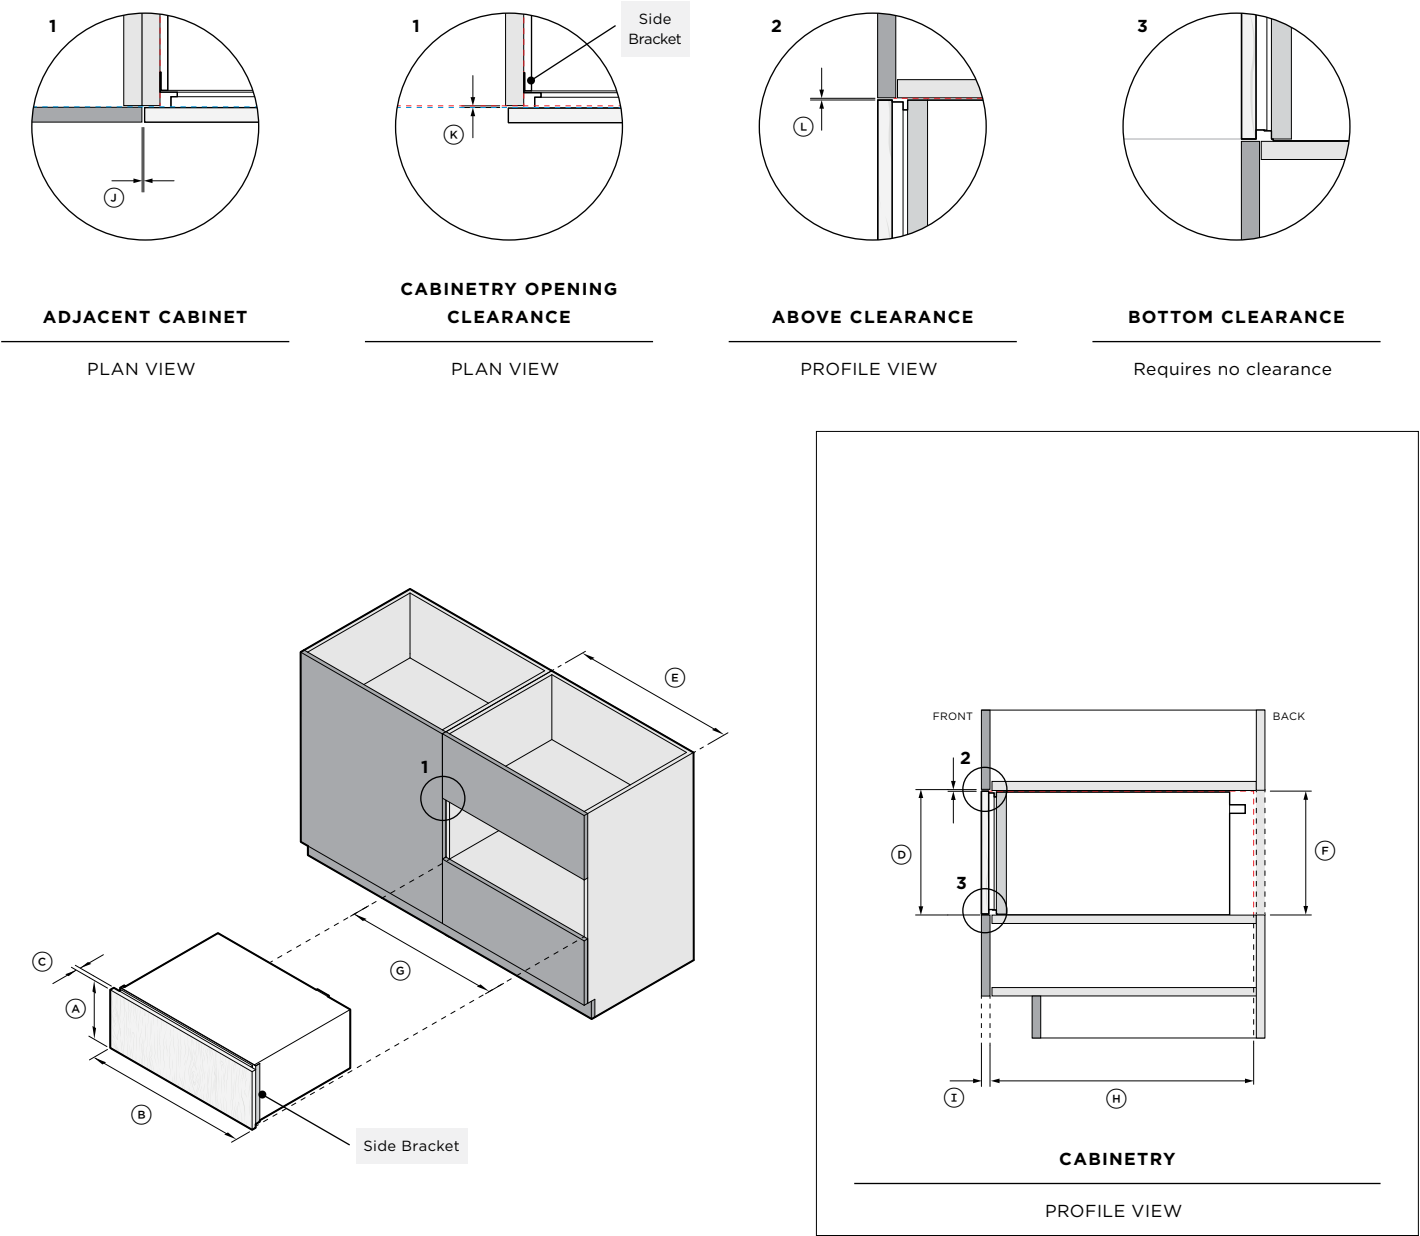

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
VB30SMB3	30" Series 9 Minimal Vacuum Seal Drawer - Black	
VB30SMG3	30" Series 9 Minimal Vacuum Seal Drawer - Grey	

Product Dimensions	inch	mm
A Overall height of product	10 11/16	271
B Overall width of product	29 7/8	758
C Thickness of front panel	13/16	20


Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

Cabinetry Dimensions	inch	mm
D Recommended cabinet height - single install	10 3/4	273
E Recommended cabinet width	30	762
F Minimum inside height of cavity	10 3/4	273
G Minimum inside width of cavity*	28 1/2	724
H Minimum inside depth of cavity**	22 13/16	580
I Thickness of cabinetry front panel	5/8-13/16	16-20

*Including anti-tip brackets.
**Measured from front of chassis.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above products front panel to upper cabinetry front panel or appliance*	5/32	4

*Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.
Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance

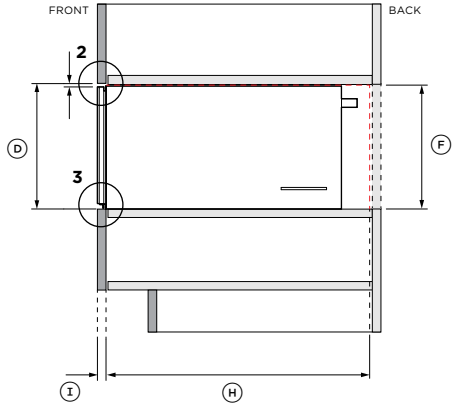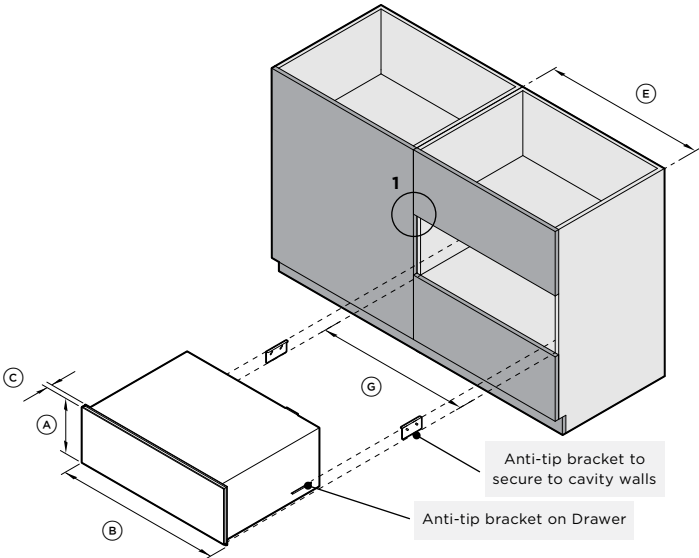


CABINETRY

PROFILE VIEW


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
VB30SDEI3 30" Series 9 Integrated Vacuum Seal Drawer		
Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of custom front panel	min 5/8	min 16
Note: Maximum custom front panel weight 11 lb (5kg).		
Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity*	28 1/2	724
(H) Minimum inside depth of cavity**	22 13/16	580
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
*Including anti-tip brackets.		
**Measured from front of chassis.		
Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Clearance behind custom front panel for push-to-open mechanism*	1/16	2
(L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		

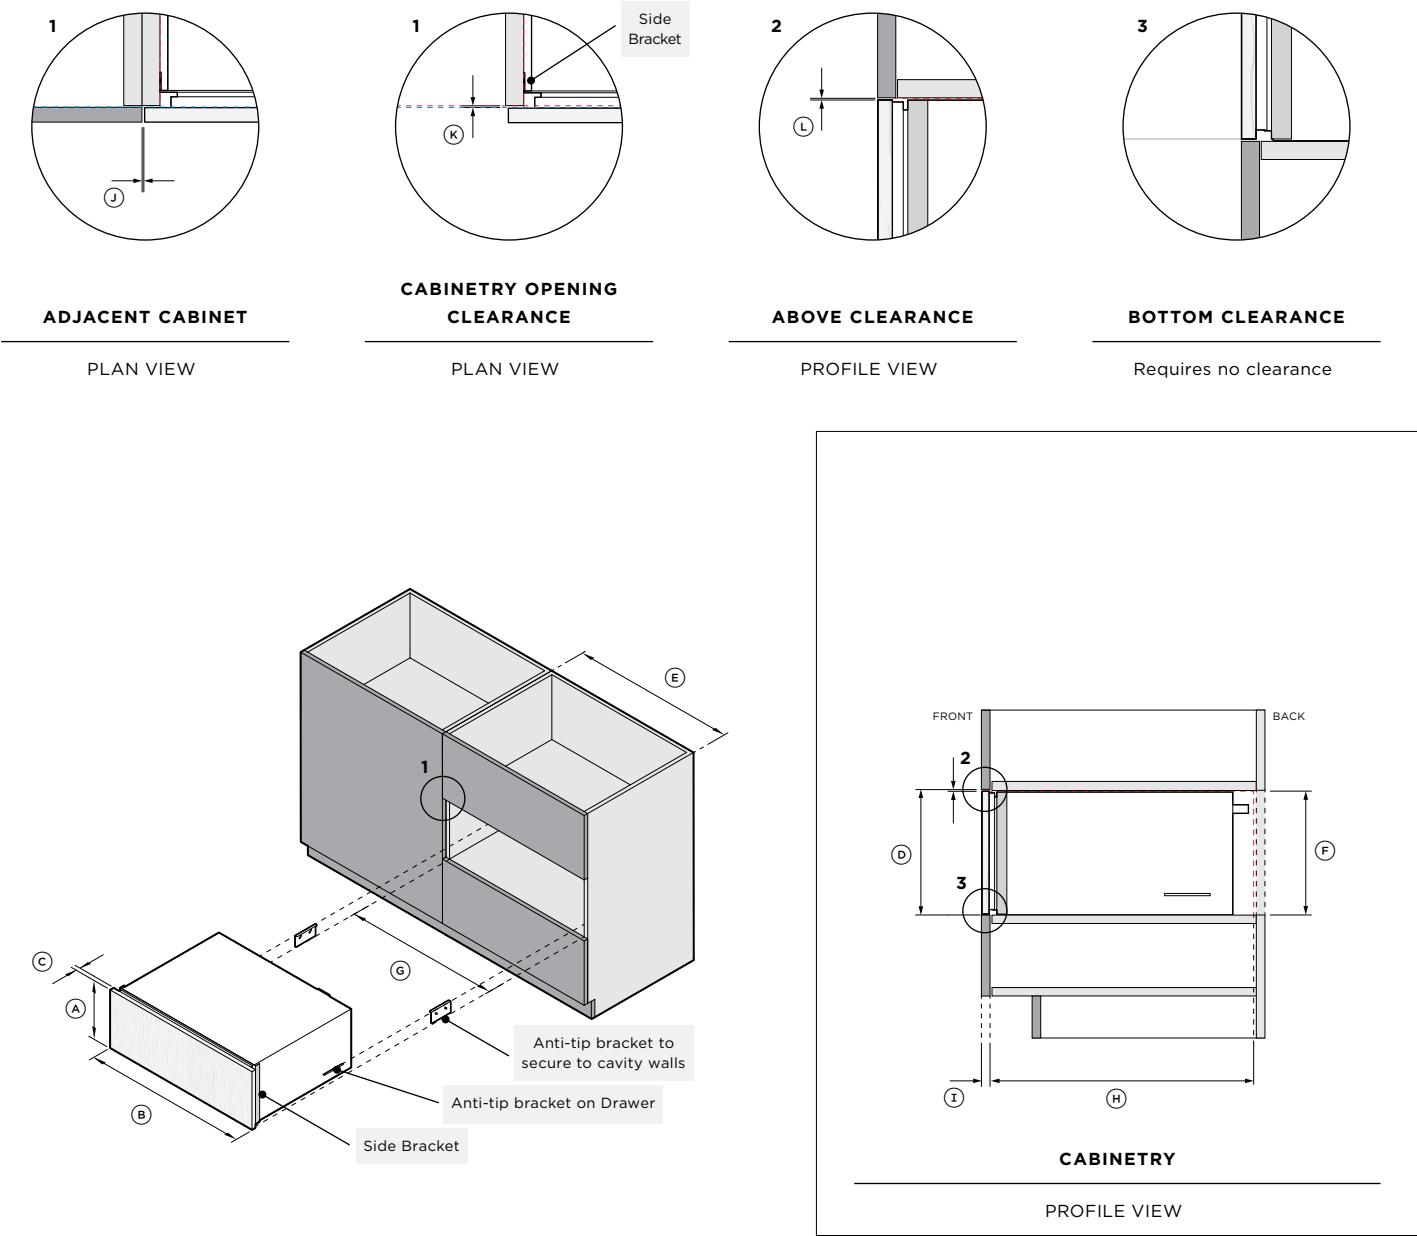

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SERVICES

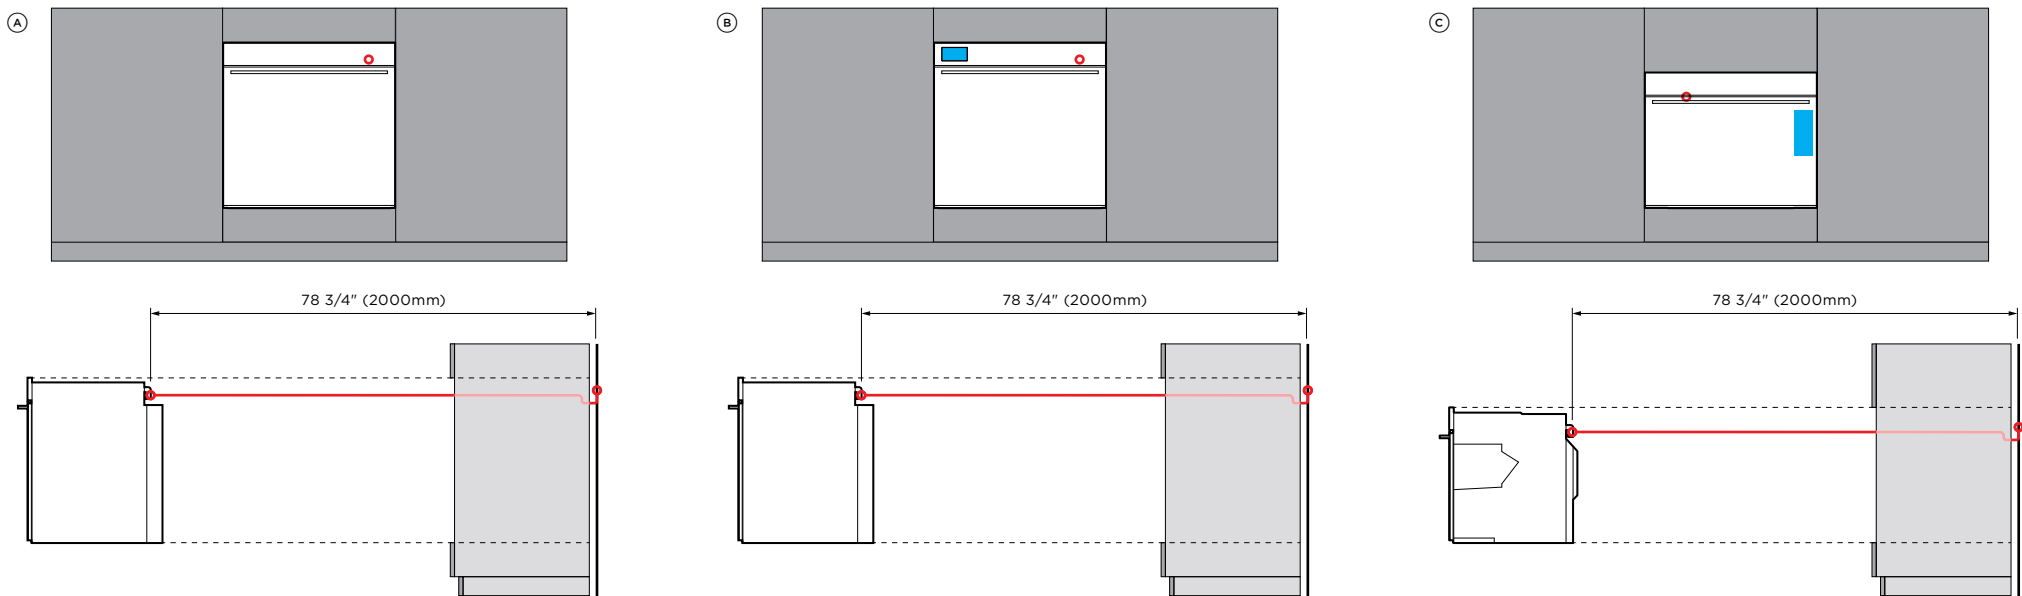

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.



	SELF-CLEANING OVEN OB30SMPUB3, OB30SMPUG3	SELF-CLEANING STEAM ASSIST OVEN OB30SMPSUB3, OB30SMPSUG3	COMBI-STEAM OVEN OS30SMUB3, OS30SMUG3
POWER CORD			
Maximum power cord length*	78 3/4" (2000mm)	78 3/4" (2000mm)	78 3/4" (2000mm)
Location	Upper right	Upper right	Upper Left
Connection**	Hard wired	Hard wired	Hard wired
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide.			
ELECTRICAL			
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz
Service	20 A	20 A	20 A
Note: Multiple product installation requires the design of power outlets according to local regulations.			
CAPACITY			
Total oven capacity	4.9cu ft (137L)	4.9cu ft (137L)	3cu ft (85L)
Total water tank capacity	-	22.65fl oz (0.67L)	47.3fl oz (1.4L)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com.



Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

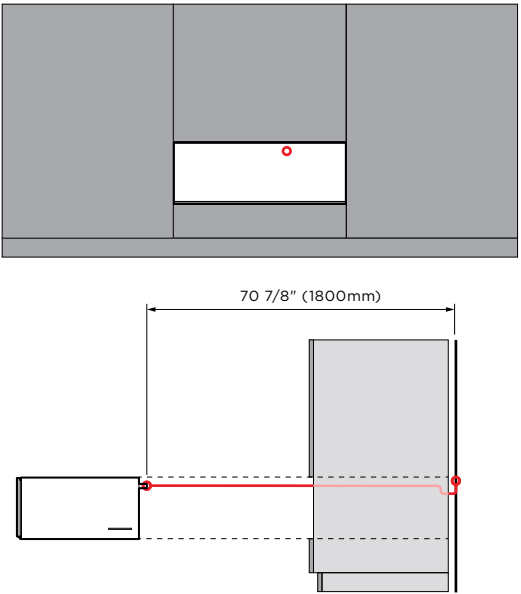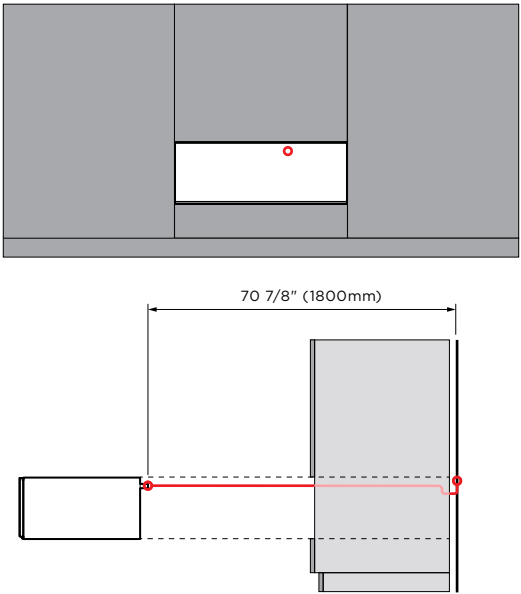

POWER CABLE

WATER TANK

POWER CORD	
Maximum power cord length*	
Location	
Connection**	
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide.	
ELECTRICAL	
Supply	
Service	
Note: Multiple product installation requires the design of power outlets according to local regulations.	

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

WARMING DRAWER AND INTEGRATED WARMING DRAWER	
WB30SMB3, WB30SMG3, WB30SDEI3	
	70 7/8" (1800mm)
	Upper right
	Plug with flex cord
	120V, 60 Hz
	15 A

VACUUM SEAL DRAWER AND INTEGRATED VACUUM SEAL DRAWER	
VB30SMB3, VB30SMG3, VB30SDEI3	
	70 7/8" (1800mm)
	Upper right
	Plug with flex cord
	120V, 60 Hz
	15 A

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)

