

GE® Clothes Care



Spacious. Efficient. Elegant. Laundry fit for your lifestyle.

imagination at work



WHAT'S NEW FOR 2004



Available March 2004

WHIRE5260E

GE 3.5 cu. ft. king-size capacity washer

- ENERGY STAR®-qualified
- Stainless steel basket
- Rotary electronic controls with cycle status lights
- 5 wash/spin speeds
- 26 cycles
- PerfectTemp
- Bleach and fabric softener dispensers



Available May 2004

WJRR4170E

GE 3.5 cu. ft. king-size capacity washer

- Stainless steel basket
- Rotary electromechanical controls
- 4 wash/spin speeds
- 17 cycles
- Bleach and fabric softener dispensers
- 4 water levels
- Auto Soak




Available May 2004

DLSR483EE/GE

GE® 7.0 cu. ft. super capacity dryer

- Long vent (up to 150 ft. of equivalent ducting)
- Auto dry
- 4 heat selections
- Interior dryer light
- DuraDrum™
- Wrinkle Care extended tumble
- 8 dry cycles

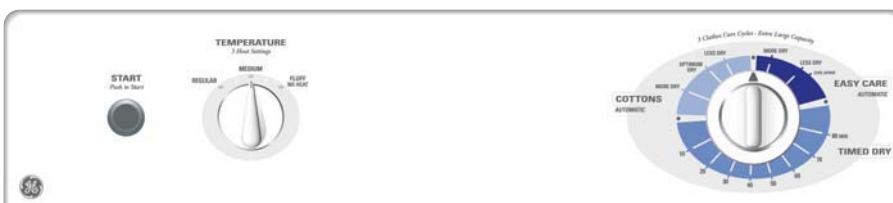

Available July 2004

DBLR333EE/GE

GE 5.8 cu. ft. extra-large capacity dryer

- 5.8 cu. ft. capacity
- DuraDrum
- 3 dry cycles
- Reverse-A-Door
- Auto dry
- 3 heat selections
- Quiet-By-Design™
- Upfront lint filter



Available July 2004

DVLR223EE/GE

GE 5.8 cu. ft. extra-large capacity dryer

- 5.8 cu. ft. capacity
- DuraDrum
- 2 dry cycles
- Reverse-A-Door
- Auto dry
- 2 heat selections
- Quiet-By-Design™
- Upfront lint filter



Available July 2004

NVLR333EE/GE

Hotpoint® 5.8 cu. ft. extra-large capacity dryer

- 5.8 cu. ft. capacity
- 3 heat selections
- Reverse-A-Door
- DuraDrum
- Quiet-By-Design™
- Upfront lint filter


GE® Dryers

	GE				Hotpoint
Electric	DLSR483ED	DBLR333EE	DVLR223EE	NVLR333EE	
Gas	DLSR483GD	DBLR333GE	DVLR223GE	NVLR333GE	
Capacity					
Capacity cu. ft.	7.0 Super	5.8 Extra-large	5.8 Extra-large	5.8 Extra-large	
Controls					
Rotary	●	●	●	●	
Long vent capability	Up to 150 ft.				
Heat selections	4	3	2	3	
Dry System					
Temperature sensor	Thermostat	Thermostat	Thermostat	Thermostat	
Dryer drum	DuraDrum™	DuraDrum	DuraDrum	DuraDrum	
Drum baffles	White	White	White	White	
Signals					
End-of-cycle	Variable				
Dry Cycles					
Number of cycles	8	3	2	3	
Cottons	●	●	●	●	
Easy care	●	●		●	
Damp dry	●				
Timed Dry					
Time control	80 min.	80 min.	80 min.	70 min.	
Special Cycles					
Dewrinkle	●				
Quick Fluff (no heat)	●				
Additional Features					
Dryer interior light	●				
Quiet performance	Quiet-by-Design™	Quiet-by-Design	Quiet-by-Design	Quiet-by-Design	
Appearance					
Colors available*	WW/CC	WW/CC	WW	WW/CC	
Weights & Dimensions					
Approx. shipping weight—elec. (lbs.)	120	112	112	112	
Approx. shipping weight—gas (lbs.)	125	115	115	115	


*WW = White on white, CC = Bisque on bisque.

Dryer Exhausting Information—Use Metal Duct Only Vertical and Horizontal Ducting

		Best Performance			
		Maximum Length of 4" Dia. Rigid Metal Duct Exhaust Hood Type		Maximum Length of 4" Dia. Flexible Metal Duct Exhaust Hood Type	
Domestic Dryer Models	Number of 90° Turns	A	B	A	B
		4" Opening	2-1/2" Opening	4" Opening	2-1/2" Opening
7.0, 6.0 and 5.8 Capacity Models all Electric Dryers	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
	3	35 ft.	25 ft.	20 ft.	15 ft.
7.0, 6.0 and 5.8 Capacity Models all Gas Dryers	4	25 ft.	15 ft.	15 ft.	10 ft.
	0	90 ft.	60 ft.	55 ft.	45 ft.
	1	60 ft.	45 ft.	40 ft.	30 ft.
	2	45 ft.	35 ft.	30 ft.	20 ft.
DLSR483E/G	3	35 ft.	25 ft.	20 ft.	15 ft.
	0	150 ft.	125 ft.	55 ft.	45 ft.
	1	135 ft.	115 ft.	52 ft.	42 ft.
	2	125 ft.	105 ft.	49 ft.	39 ft.
	3	115 ft.	95 ft.	46 ft.	36 ft.
	4	105 ft.	85 ft.	43 ft.	33 ft.
	5	95 ft.	75 ft.	40 ft.	30 ft.



Dryer Dimensions (in inches)

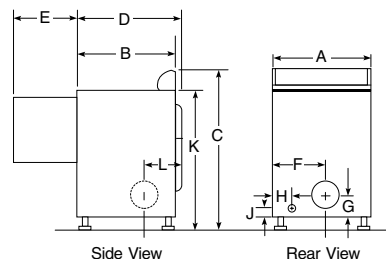

Dryer Specifications

Exhaust Options:

Electric: 4-way via rear, right, left and bottom. Except for DLSR483 which is exhausted 3-way via rear, right and bottom.

Gas: For 5.8 and 7.0 cu. ft. dryers, when viewed from the front of the unit, exhaust 3-way via rear, left and bottom. Except for DLSR483 which is exhausted 2-way via rear and bottom for gas. Dryer is shipped exhausted to the rear. Alternate exhausting knockouts are supplied.

Circuit Requirements:

Electric: An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse is required.

Electric Dryer Rating:

240V, 5600W, 24A, 60Hz—5.8, and 7.0 cu. ft. dryers
208V, 4400W, 22A, 60Hz—5.8, and 7.0 cu. ft. dryers

Gas: An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or a time-delay fuse is required.

NEMA Receptacle Numbers:

3 prong dryer cord/30A/4' long (cat #WX9X2) is for NEMA10-30R receptacle.

4 prong dryer cord/30A/4' long (cat #WX9X18) is for NEMA14-30R receptacle.

	5.8 cu. ft. Capacity	7.0 cu. ft. Capacity
A	27	27
B	25-1/2*	25-1/2*
C	42	42
D	25-3/4	28-1/4
E	23-1/2	23-1/2
F	11-1/2	11-1/2
G	3-1/2	3-1/2
H	2	2
J	2-1/2	2-1/2
K	36	36
L	5-1/4	8-1/2

*24-1/2" from the edge of the side panel to the front. 25-1/2" from front to edge of end caps.

Gas Dryer Electric Rating:


120V, 60Hz, 6A

Gas (BTU/HR): 22,000. Factory-equipped for natural gas. Tested for LP gas. LP gas supply requires an optional conversion kit, 5.8 and 7.0 cu. ft. model kit is WE25X0217. Have a qualified gas technician install a conversion kit. See dryer ducting information for proper installation.

Dryer Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Power Cord Locations

5.8 and 7.0 Dryers




GE® Washers

	GE	
	WHRE5260E	WJRR4170E
Capacity		
Capacity cu. ft.	3.5 King-size	3.5 King-size
Energy		
ENERGY STAR®	●	
Controls		
Rotary electronic	●	Rotary electromech.
Status indicators	Status lights	
Water temp system	PerfecTemp	
Wash/rinse temps	3	3
Water levels	4	4
Wash System		
Wash basket	Stainless steel	Stainless steel
Wash mechanism	GentlePower™ Agitator	GentlePower Agitator
Wash/spin combinations	5	4
Drive System		
Transmission	Steel	Steel
Maximum spin speed	630 RPM	630 RPM
Dispensers		
Bleach	●	●
Fabric softener	●	●
Wash Cycles		
Number of cycles	26	17
Cottons Regular		
Auto soak (30 min.)	●	●
Auto soak (15 min.)	●	●
Extra heavy soil	●	
Heavy soil	●	●
Medium soil	●	●
Light soil	●	●
Extra light		●
Easy Care		
Auto soak (15 min.)	●	●
Heavy soil	●	●
Medium soil	●	●
Light soil	●	●
Extra light soil		●
Casuals - Pulsed		
Heavy soil	●	
Medium soil	●	
Delicate		
Medium soil	●	●
Light soil		●
Hang to Dry/Prewash		
	●	
Special Cycles		
Prewash		●
2nd rinse	●	●
Extended spin	●	
Rinse & spin (Quick rinse)	●	●
Spin only	●	●
Additional Features		
Quiet performance	Quiet-By-Design	Quiet-By-Design™
Color lid instructions	●	●
Appearance		
Colors available*	WW, CC	WW, CC
Weights & Dimensions		
Approx. shipping weight (lbs.)	160	160

*WW = White on white, CC = Bisque on bisque.



Washer Dimensions (in inches)

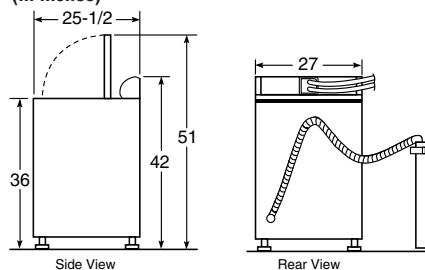

Washer Specifications

Circuit Requirements:

An individual, properly grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15- or 20-amp circuit breaker or time-delay fuse is required.

Electrical Rating:

115V, 60Hz, 10A

Washer Note:

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

Feature for feature, GE® clothes care systems wash away the competition!



Performance

Stainless steel basket

Resists rust, won't chip peel or snag fabrics.



Efficiency



Convenience

Capacity

3.5 cu. ft. capacity allows you to wash BIG loads.



Performance

Better clothes care


Auto Dry system monitors air temperature, shutting off dryer when the proper dryness level is reached.



Quality

Designed for performance

Upfront lint filter is close at hand for cleaning, optimizing dryer performance.

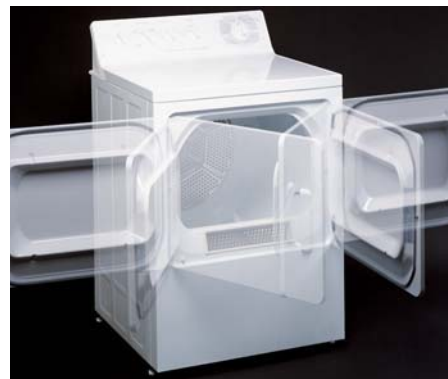

Convenience

Ultimate in flexibility

Reverse-A-Door is the ultimate in flexibility. Change door swing to accommodate your laundry area.



GE Appliances

GE Consumer Products
GE Company
Louisville, Kentucky 40225
GEAppliances.com

As an ENERGY STAR® partner, GE has determined that the appliances marked with the ENERGY STAR logo meet the ENERGY STAR guidelines for energy efficiency.

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2003 GE Company
Pub. No. 14-X004 PC37331