

WD30WC
30-INCH WARMING DRAWER
PUSH TO OPEN



FEATURES & BENEFITS

- Our warming drawer is the perfect combination of uncompromising performance, unique convenience features and elegant design
- Warming mode with four convenient temperature settings
- Drawer installs vertically under Thermador speed, steam or wall oven

| GENERAL PROPERTIES | |
|---|-----------------------------|
| Power Levels | Low, Med, High, Proof |
| Dough Proofing Mode | Yes |
| Temperature Settings | 100° – 190° F |
| Timer | 5 min. – 5 hours |
| Automatic Shut Off | After 1 hour |
| Door Opening | Push to Open |
| Control Type | Illuminated Touch Control |
| CAPACITY | |
| Cavity Capacity | 2.2 cu. ft. |
| TECHNICAL DETAILS | |
| Watts | 450 W |
| Circuit Breaker | 15 A |
| Volts | 120 V |
| Frequency | 60 Hz |
| Power Cord Length | 84" |
| Plug Type | 120V 3 Prong |
| DIMENSIONS & WEIGHT | |
| Overall Appliance Dimensions (HxWxD) | 9 7/16" x 29 3/4" x 24 1/2" |
| Required Cutout Size (HxWxD) – Standard | 9 1/4" x 28 1/2" x 23 1/2" |
| Required Cutout Size (HxWxD) – Flush | 9 9/16" x 30" x 24 1/2" |
| Net Weight | 55 lbs |
| WARRANTY | |
| Limited Warranty Parts and Labor | 2 Year |

†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.


WD30WC

30-INCH WARMING DRAWER

PUSH TO OPEN



30-INCH WARMING DRAWER AND CUTOUT DIMENSIONS

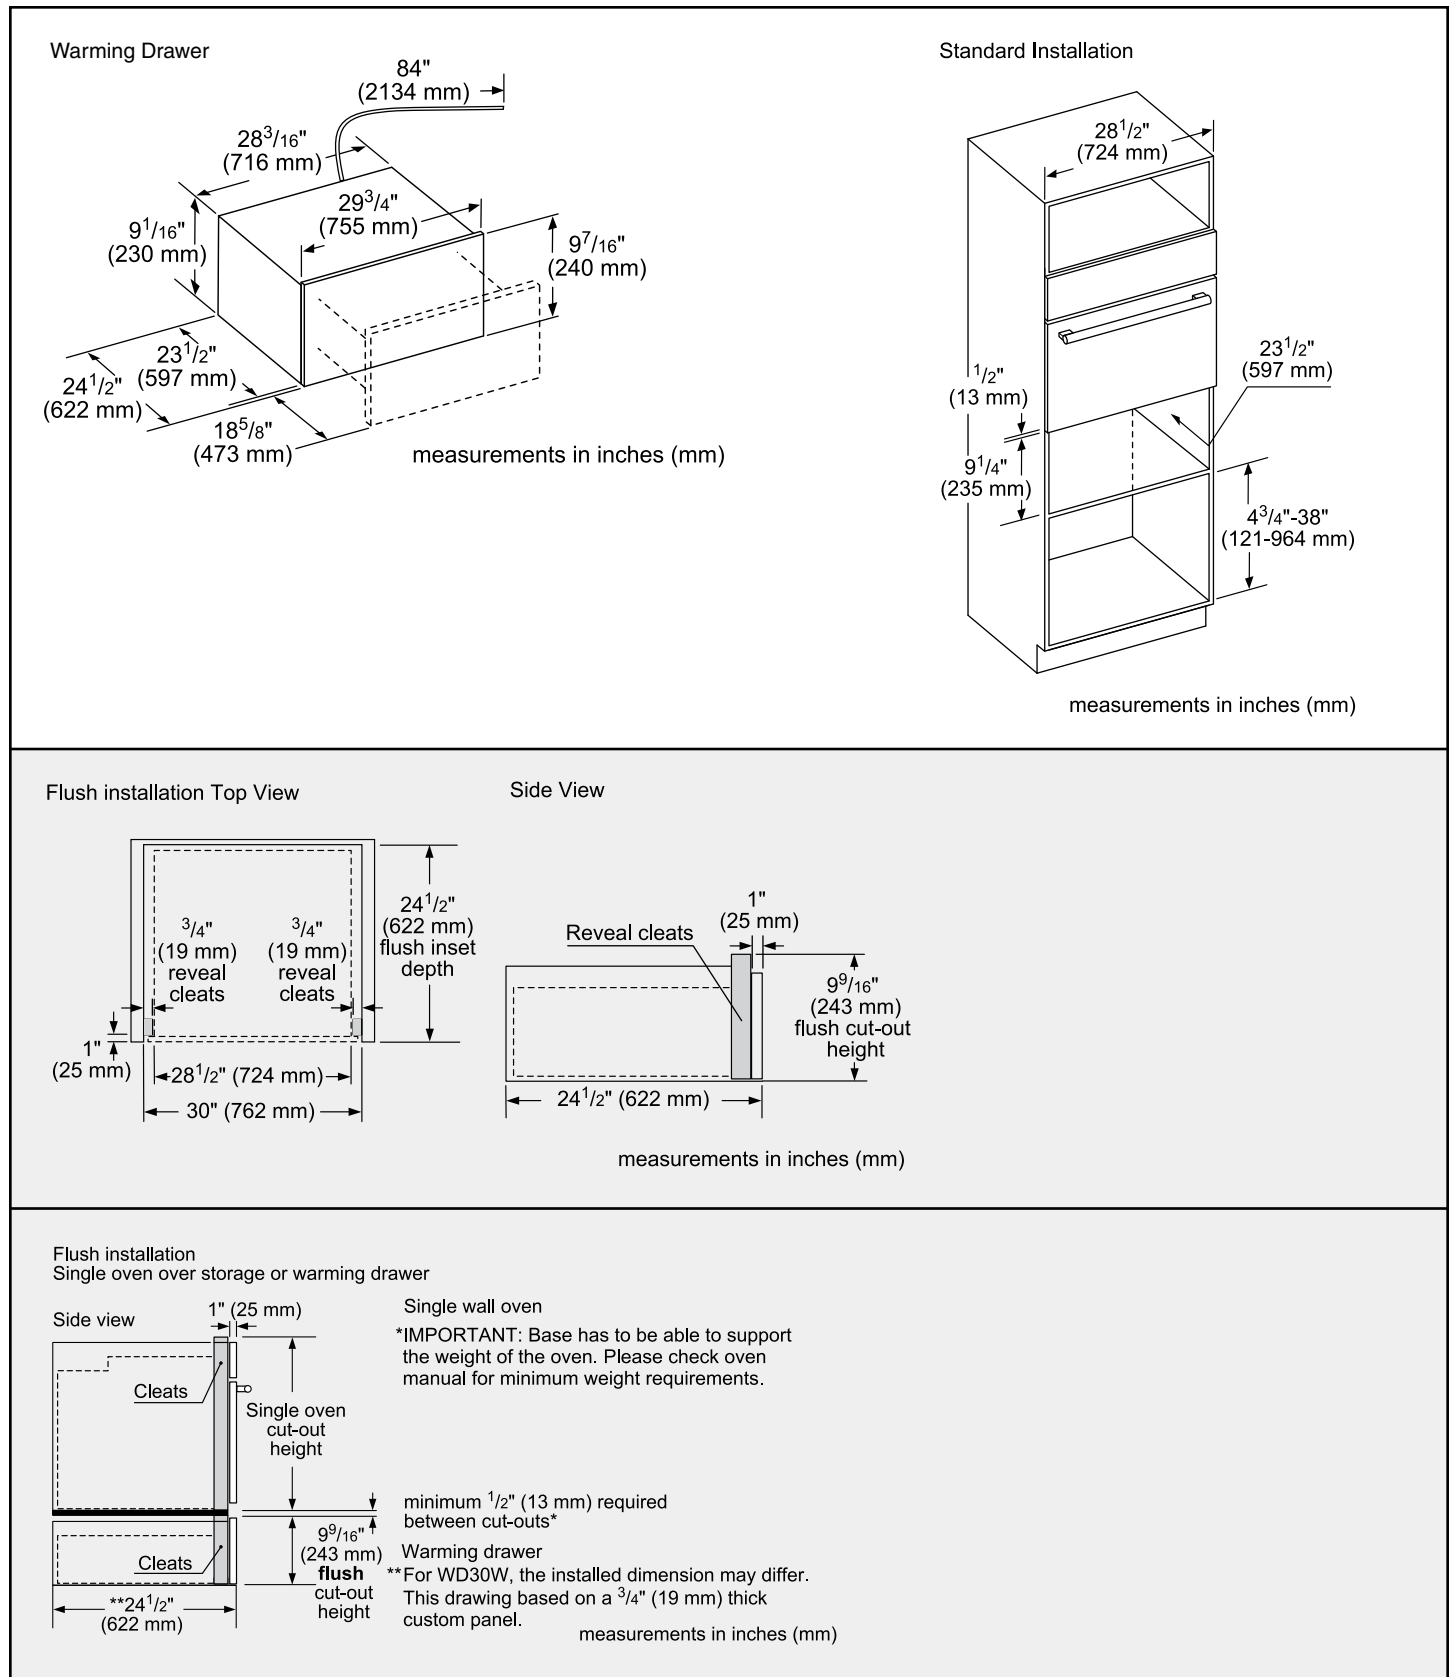

WD30WC


30-INCH WARMING DRAWER

PUSH TO OPEN




INSTALLATION DETAILS

Standard installation
Single oven, double oven or combo oven over warming or storage drawer

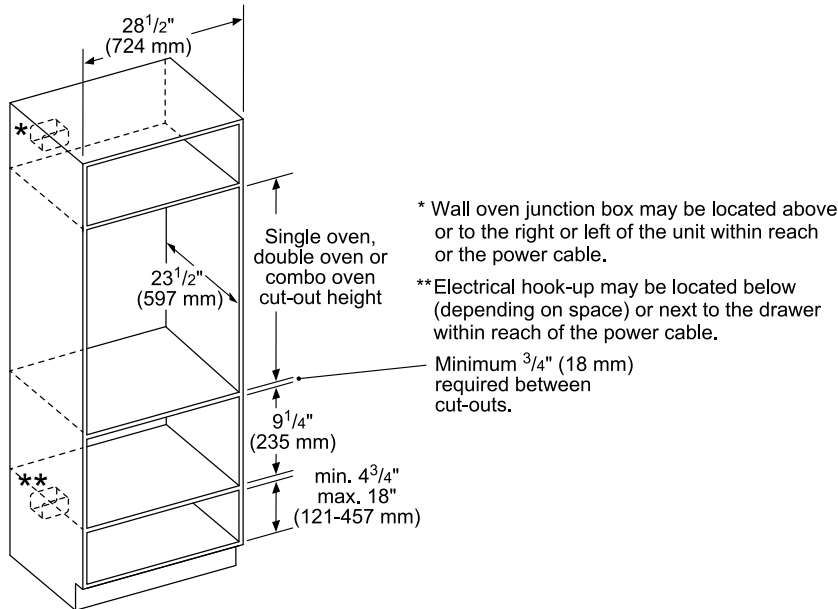

measurements in inches (mm)

Flush installation
Double or combo oven over storage or warming drawer

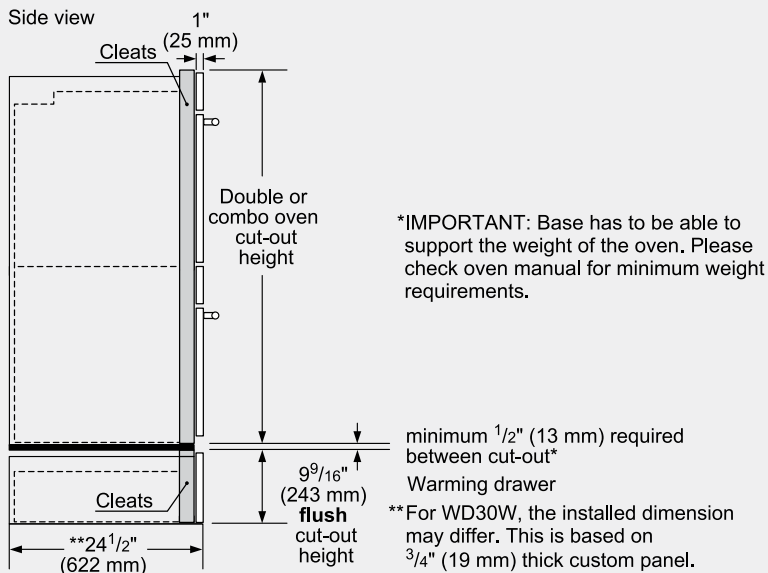

measurements in inches (mm)

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.