


DESIGNER

VISTA


WALL

ZEPHYR


ZEPHYRONLINE.COM

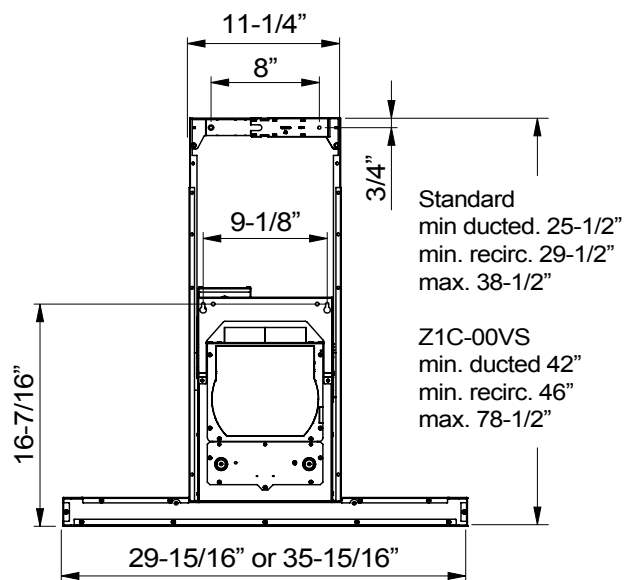

BACK

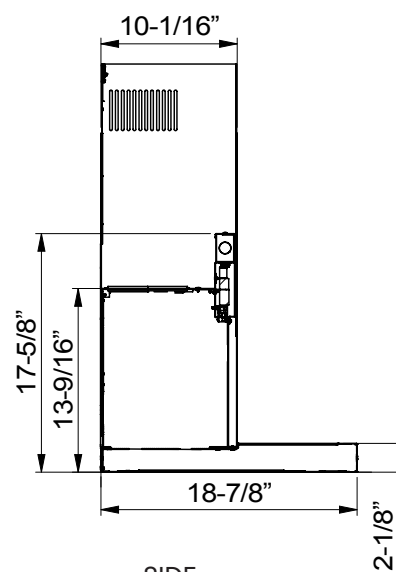

SIDE

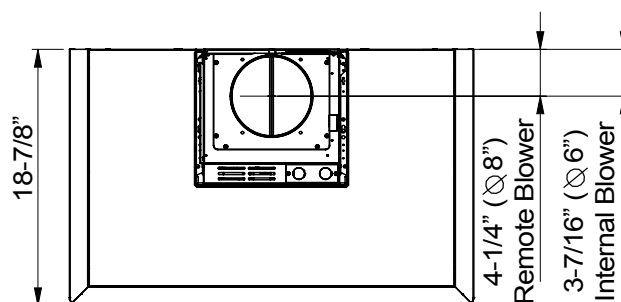

TOP

MODEL

Stainless Steel
SizeDVS-E30ASSX
30"DVS-E36ASSX
36"

BLOWER PERFORMANCE

Internal Blower (CBI-290C)*

200-290 CFM, 1.4-3 sones

200-290 CFM, 1.4-3 sones

Internal Blower (CBI-390A)*

200-390 CFM, 1.4-5 sones

200-390 CFM, 1.4-5 sones

Internal Blower (CBI-600A)*

240-600 CFM, 1.8-6 sones

240-600 CFM, 1.8-6 sones

In-Line Blower (PBN-1000A)*

500-1,000 CFM, sones NA

500-1,000 CFM, sones NA

External Blower (CBE-1000)*

500-1,000 CFM, sones NA

500-1,000 CFM, sones NA

FEATURES

Controls

Invisible Touch

Invisible Touch

Speed Levels

3

3

Auto Delay-Off

Yes

Yes

CleanAir Function**

Yes

Yes

Lighting

LED, 5W x2

LED, 5W x2

Tri-Level Lighting

Yes

Yes

Filters

Aluminum Mesh x2

Aluminum Mesh x3

Perimeter Aspiration System

Yes

Yes

Recirculating

Yes

Yes

Extension Duct Cover Option

Yes, Up to 12' Ceiling

Yes, Up to 12' Ceiling

ADA Compliant

Yes, with remote option

Yes, with remote option

DUCT SPECIFICATIONS

Vertical Single Internal Blower

6" Round

6" Round

Vertical In-Line/External Blower

10" to 8" Round***

10" to 8" Round***

AC POWER

Hood w/ CBI-290C

120V, 60Hz, Max. 1A

120V, 60Hz, Max. 1A

Hood w/ CBI-390A

120V, 60Hz, Max. 2.1A

120V, 60Hz, Max. 2.1A

Hood w/ CBI-600A

120V, 60Hz, Max. 3A

120V, 60Hz, Max. 3A

Hood w/ PBN-1000A

120V, 60Hz, Max. 5.4A

120V, 60Hz, Max. 5.4A

Hood w/ CBE-1000

120V, 60Hz, Max. 6.6A

120V, 60Hz, Max. 6.6A

OPTIONAL ACCESSORIES

Recirculating Kit

ZRC-00VS

ZRC-00VS

Remote Control

RC-0003

RC-0003

Duct Cover - Stainless Steel

Z1C-00VS

Z1C-00VS

Stainless Steel Telescopic Backsplash

AK1710

AK1716

Make-Up Air Kit

MUA006A (600 CFM)

MUA006A (600 CFM)

MUA008A (1,000 CFM)

MUA008A (1,000 CFM)

MOUNTING HEIGHT RANGE****

24" - 36"

24" - 36"

WARRANTY

2 year parts, 1 year labor

2 year parts, 1 year labor

CEILING HEIGHT

8'

8.5'

9'

9.5'

10'

10.5'

11'

12'

STANDARD
DUCT COVER

Ducted Mounting Height*

24" - 34.5"

27.5" - 36"

33.5" - 36"

NA

NA

NA

NA

NA

Recirc Mounting Height*

24" - 30.5"

27.5" - 36"

33.5" - 36"

NA

NA

NA

NA

NA

EXTENSION
DUCT COVER

Ducted Mounting Height*

NA

24" - 24"

24" - 30"

24" - 36"

24" - 36"

24" - 36"

24" - 36"

24" - 36"

29.5" - 36"

Recirc Mounting Height*

NA

NA

24" - 26"

24" - 32"

24" - 36"

24" - 36"

24" - 36"

24" - 36"

29.5" - 36"

*Blower sold separately.

**CleanAir turns your hood on once every four hours for 10 minutes on speed one.

***10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

****Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

DID YOU KNOW?

The Perimeter Aspiration System moves airflow away from the central area of the hood and evenly distributes it through narrow openings around the perimeter of the hood. This ventilation method increases air velocity and improves the capture of cooking contaminants.