

HR 1924-3 G DF
30 inch range
Dual Fuel model with M Touch.



- Network-enabled WiFi appliance – Miele@home
- Plenty of space for cooking – four powerful burners
- Perfect baking and roasting results – Moisture plus
- Ergonomic and easy operation – motorized lift-up control panel
- Precise cooking temperature – Wireless Precision Probe

EAN: 4002516486756 / Material number: 11791550 / Old Material Number: 25192481USA

| Type of heating | |
|---|-------------------|
| Dual fuel | • |
| Gas type | Natural gas |
| Construction type | |
| Range | • |
| Appliance width in inches | 30 |
| Operating modes | |
| Speed Oven MasterChef automatic programs | • |
| Maxi Broil | • |
| Defrost | • |
| Auto roast | • |
| Broil | • |
| Intensive Bake | • |
| Moisture Plus | • |
| Slow roast | • |
| Surround | • |
| Browning | • |
| Bake | • |
| Convection Roast | • |
| Special modes | • |
| Design | |
| Appliance color | Clean Touch Steel |
| Convenience features | |
| Wireless Precision Probe | • |
| Keep-warm function | • |
| Crisp function | • |
| Cooktop features | |
| Number of gas burners | 4 |
| Number of TrueSimmer burners x power in BTU | 1 x 8.00 |
| Number of power burners x power in BTU | 1 x 12.50 |
| Number of high burners x power in BTU | 3 x 19.50 |
| True Simmer function | • |
| GasStop | • |
| Control panel | |
| Precision knobs | • |
| Illuminated knob | • |
| ComfortSwivel handle | • |
| Motorized lift-up control panel | • |
| Sabbath program | • |
| Time synchronization | • |
| Automatic switch-off | • |
| Acoustic signal when desired temperature is reached | • |
| User convenience | |
| MultiLingua | • |
| MyMiele | • |
| Timed bursts of steam | • |
| Time of day display | • |
| Date display | • |
| Minute minder | • |
| Programmable cooking time | • |


HR 1924-3 G DF
30 inch range
Dual Fuel model with M Touch.



EAN: 4002516486756 / Material number: 11791550 / Old Material Number: 25192481USA


| | |
|---|--------------------|
| Actual temperature display | • |
| Default temperature | • |
| Favorites | • |
| Individual settings | • |
| Door | |
| CleanGlass door | • |
| Door contact switch | • |
| SoftClose oven door/ SoftOpen | • |
| Cavity | |
| Oven cavity volume in cu. ft. (l) | 4.59 (130) ft³ (l) |
| Number of oven shelf levels | 6 |
| No. of halogen lamps | 2 |
| TwinPower hot air fans | • |
| Efficiency and sustainability | |
| Residual heat utilization | • |
| Energy-saving lighting circuit | • |
| Rapid PreHeat | • |
| Cleaning convenience | |
| Stainless-steel front with partial Clean Touch Steel finish | • |
| Oven with self-cleaning program | • |
| AirClean catalyzer | • |
| ComfortClean dishwasher-safe grates | • |
| Cooktop surface | Black enamel |
| Safety | |
| Appliance cooling system and cool touch front | • |
| Safety cut-out | • |
| System lock | • |
| Door contact switch | • |
| Door lock during self cleaning | • |
| Technical data | |
| Appliance height min in in.(mm) | 37 1/8 (942) |
| Dimensions (depth) in in. (mm) with bullnose | 27 3/4 (702) |
| Appliance height max in in.(mm) | 38 5/8 (980) |
| Fresh water connection for Moisture Plus | • |
| Fresh water connection for Moisture Plus | 1.5 |
| Appliance width in in. (mm) | 30 (762) |
| Power Rating in V | 120 |
| Voltage in V | 240/208 |
| Number of phases | 1 |
| Fuse rating in A | 30 |
| Accessories supplied | |
| Anti-splash insert | 1 |
| Self Clean ready baking and roasting rack | 2 |
| Self clean ready baking and roasting racks with rail system | 1 |
| Side racks self clean ready | 1 |

HR 1924-3 G DF 30 inch range Dual Fuel model with M Touch.

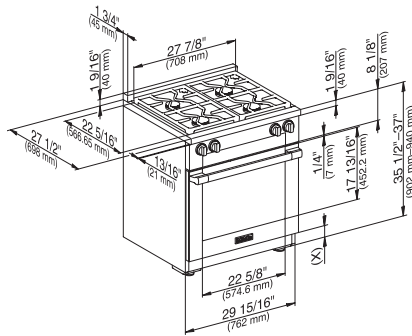


HR1924, HR1924-2, HR1924-3 (installation drawing)

(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)

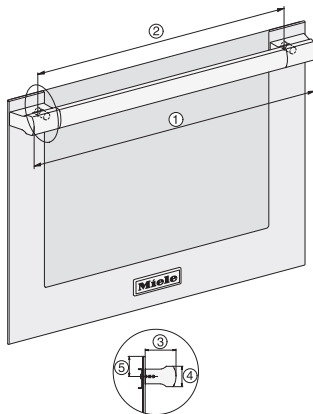


H1xxx installation drawings

1 29 11/16" / 754 mm, 2 23 3/4" / 603,6 mm, 3 2 5/8" / 66,5 mm, 4 1 11/16" / 43 mm, 5 1 11/16" / 42,5 mm

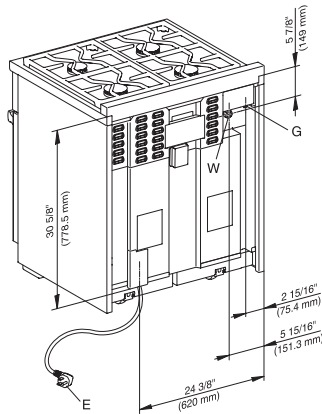


HR1924 (installation drawing)

E = Electric Connection, W = Water connection, G = Gas connection

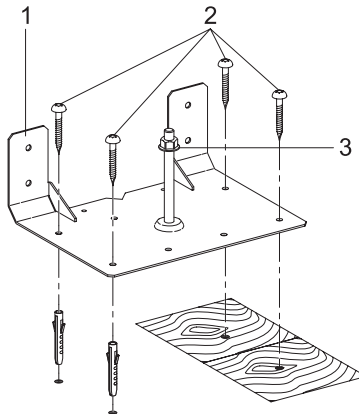


HR11xx, HR19xx, HR 17xx – Installation drawing

1 Anti-tip device, 2 Screws, 3 Locking nut

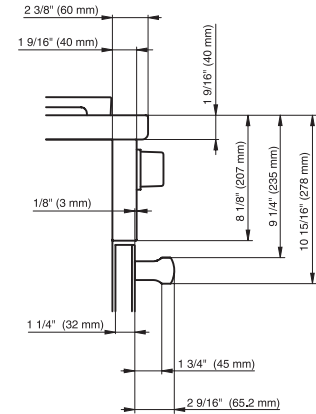

HR19xx, HR193x, HR195x (installation drawing)


(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)

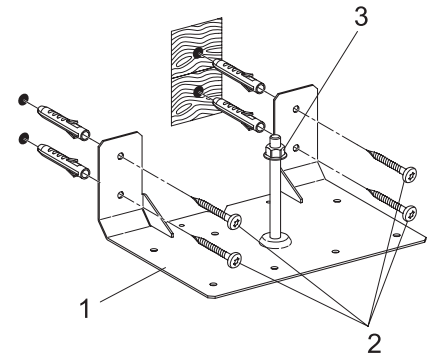

HR11xx, HR19xx – Installation drawing


1 Anti-tip device, 2 Screws, 3 Locking nut

HR 1924-3 G DF
30 inch range
Dual Fuel model with M Touch.

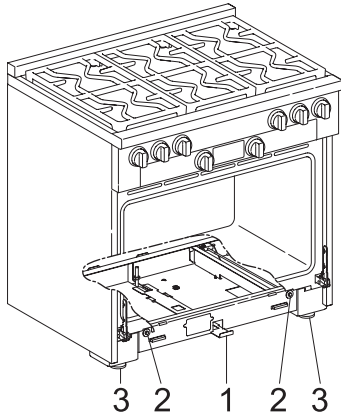


HR11xx, HR19xx, HR17xx – Installation drawing

1 Anti-tip device , 2 Screws, 3 Locking nut

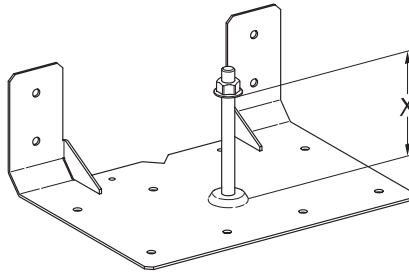


HR11xx, HR19xx, HR17xx – Installation drawing

X 3 13/16" (97 mm): HR1124, HR1134, HR1135, HR1136, HR1724, HR1924, HR1934, HR1935, HR1936, HR1954, HR1955, HR1956, , X 3 1/4" (82 mm): HR1134-2, HR1134-3, HR1135-2, HR1135-3, HR1136-2, HR1136-3, HR1924-2, HR1924-3, HR1934-2, HR1934-3, HR1935-2, HR1935-3, HR1936-2, HR1936-3, HR1954-2, HR1954-3, HR1955-2, HR1955-3, HR1956-2, HR1956-3

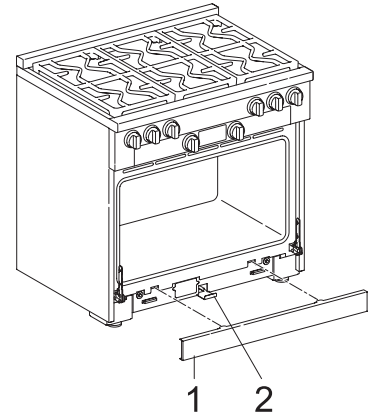


HR11xx, HR19xx, HR17xx – Installation drawing

1 Toe kick cover , 2 Locking clamp

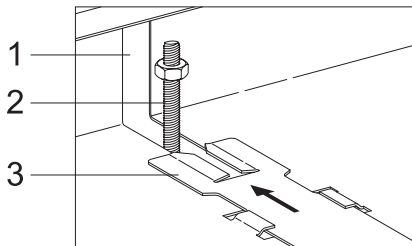


HR11xx, HR19xx, HR17xx – Installation drawing

1 Opening in the range housing , 2 Bolt of the anti-tip device , 3 Locking clamp with slot



HR19xx – Installation drawing


Maximum depth of top cabinet , Minimum distance to bottom edge of top cabinet , Distance from the floor to cooktop surface , Minimum distance to combustible surfaces , , E = Electric connection, W = Water connection, G = Gas connection , , (A) Width of cabinet opening, (B) Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface. Minimum distance to a protected combustible surface or when a Miele Ventilation Hood is installed. For all other Hoods please consult the manufacturer's specifications for required distances., (C) Maximum connection width right and left , (D) Maximum connection height , (E) Maximum connection depth

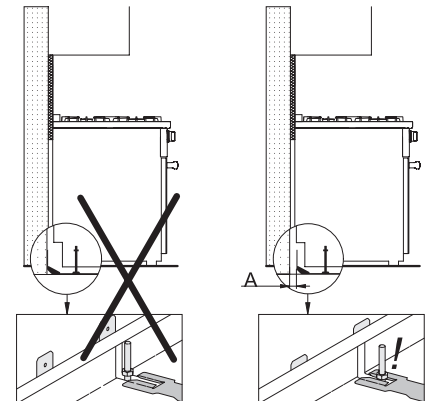

HR11xx, HR19xx, HR17xx – Installation drawing

A = Distance between the rear of the range to the supporting wall

HR 1924-3 G DF
30 inch range
Dual Fuel model with M Touch.

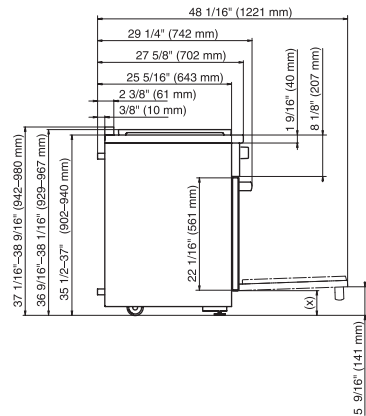

HR1924-3, HR1934-3, HR1935-3, HR1936-3, Side view, installation drawing

(x) = Toe-kick height adjustment 5" – 6 1/2" (127 mm – 165.1 mm)