

30" Overhead Range Hood

Ventilation

Available Products: FHC3040MS

Available Colors: Stainless Steel

Version: 08/22



Product Specifications

Ventilation System

Exhaust Fan Speeds	3
Maximum Air Flow Capacity	300 CFM
Maximum Sones Rating	7.7 sone
Charcoal Filter Included	Yes

Surface Light System

Lighting Type	Halogen
Number of Lights	2

Electrical Specifications

Voltage Rating	120 V
----------------	-------

Certifications and Approvals

ADA Compliant	No
---------------	----

Controls

Control Type	Push Button
--------------	-------------

Dimensions and Volume

Height	5"
Width	30"
Depth	18 5/8"


General Specifications

Prop 65 Label	Yes
Sound Level	68.2 dBA
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals

CSA Listed	No
UL Listed	Yes
ETL Listed	No

Installation Diagram

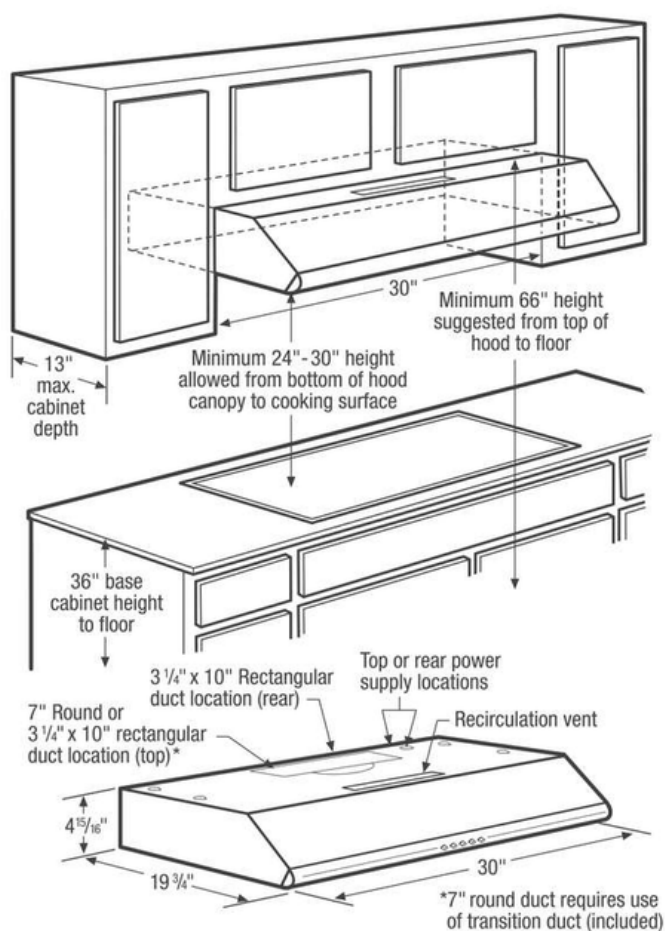


Exhaust Options


Vent hood can be vertically or horizontally ducted outside using round or rectangular duct; or recirculated inside with no ducting required.

For detailed duct preparation and installation specifications, refer to installation instructions on web.


**Outside Vertical – 7" Round Duct
Cabinet Bottom**

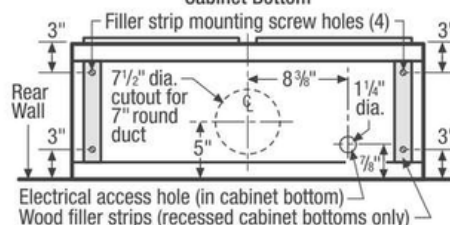

Outside Vertical – 3 1/4" x 10" Rectangular Duct Cabinet Bottom

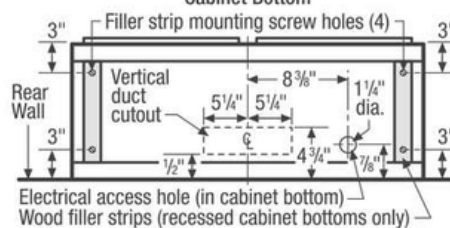

Outside Horizontal – 3 1/4" x 10" Rectangular Duct Cabinet Front

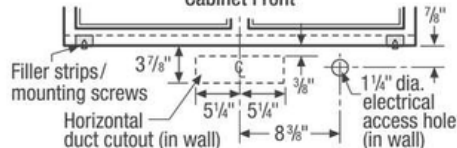

For planning purposes only. We reserve the right to change specifications or discontinue models without notice. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca