



# 120-Volt Electric Compact Dryer


## PRODUCT MODEL NUMBERS

LDR3822P

**Electrical:** 120-volt, 60-Hz, AC-only, 15- or 20-amp. electrical supply. A time-delay fuse or circuit breaker is recommended. Use a separate electrical circuit.

**Exhaust venting:** Exhaust your dryer to the outside. Four-inch diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust outlet hood must be at least 12 inches from the ground or any object that may be in the path of the exhaust.

## OVERALL DIMENSIONS

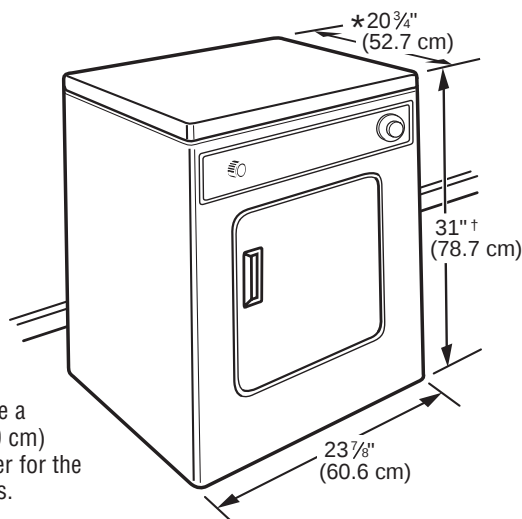


\*Most installations require a minimum 5-1/2 in. (14.0 cm) clearance behind the dryer for the exhaust vent with elbows.

†Height with caster is 32 1/2" (82.6 cm)

## RECESSED AREA AND CLOSET INSTALLATION

### Recessed or closet installation - Dryer only

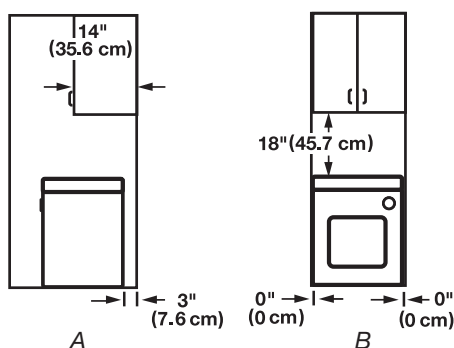


A. Side view - closet or confined area  
B. Recessed area

### Closet confined area


For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent air openings are acceptable.

### Recessed or closet installation - Stacked

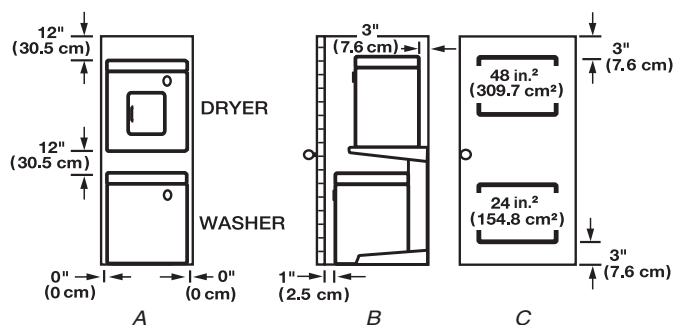

A. Recessed area  
B. Side view - closet or confined area  
C. Closet door with vents

## EXHAUST VENTING

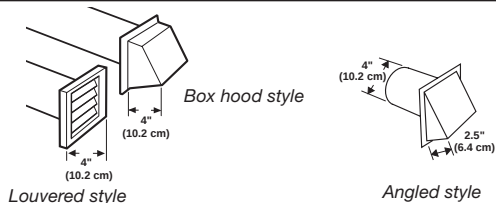

1. Select the route that will provide the straightest and most direct path outdoors. Plan the installation to use the fewest number of elbows and turns. When using elbows or making turns, allow as much room as possible. Bend vent gradually to avoid kinking. Avoid 90° turns when possible.

2. Determine vent length.

The maximum length of the exhaust system depends upon:

- The type of vent (rigid metal or flexible metal).
- The number of elbows used.
- Type of hood.

See the exhaust vent length chart that matches your hood type for the maximum vent lengths you can use.

3. Determine the number of elbows you will need.

**IMPORTANT:** Do not use vent runs longer than specified in the Vent Length Chart. In the column listing the type of metal vent you are using (rigid metal or flexible metal), find the maximum length of metal vent on the same line as the number of elbows.

| Number of 90° turns or elbows | Type of vent   | Box or louvered hoods | Angled hoods  |
|-------------------------------|----------------|-----------------------|---------------|
| 0                             | Rigid metal    | 36 ft (11 m)          | 26 ft (7.9 m) |
|                               | Flexible metal | 28 ft (8.5 m)         | 22 ft (6.7 m) |
| 1                             | Rigid metal    | 26 ft (7.9 m)         | 16 ft (4.9 m) |
|                               | Flexible metal | 18 ft (5.5 m)         | 12 ft (3.7 m) |
| 2                             | Rigid metal    | 16 ft (4.9 m)         | 6 ft (1.8 m)  |
|                               | Flexible metal | 8 ft (2.8 m)          | 2 ft (0.6 m)  |