

Designed with simplicity in mind, the BUF4 range hood models are made to exacting standards and offer the most for the money.

SIZE	WHITE	BLACK	STAINLESS FINISH	STAINLESS	GREASE FILTER (replacement)	NON-DUCT CHARCOAL FILTER
30 in.	BUF403WW	BUF403BL	BUF403SF	BUF403SS	BP29	41F

## FEATURES

Max. Blower CFM†	230
Control type	2-speed rocker switch
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
Lighting	1-level intensity Designed for LED bulb (not included) A19, E26 base. If using incandescent bulb, 75 Watts max, purchase optional light guard #S99110437.
Grease Filter	Aluminum (Qty. 1)
ENERGY STAR®	no
Recirculation	Charcoal filter sold separately
ADA Compatible	yes
Duct Direction	Vertical (7 in. round - damper sold separately) Vertical/Horizontal (3-1/4 in. x 10 in. - damper included)

## AC INPUT

120 V, 60 Hz - 2.5 AMPS

## OPTIONAL ACCESSORIES

3¼ in. x 10 in. to 6-in. Round Duct Transition	411
7-in. Round Damper	BP87Q
7-in. Round Adapter Plate	SR680508
Electrical Cord Kit	HCK44
ADA Wiring Kit	HAWSK3


## MOUNTING HEIGHT

18 in. to 24 in. from cooktop to bottom of hood

## LIMITED WARRANTY


1-year  
(See installation manual for full warranty text.)

## FOR INDOOR USE ONLY

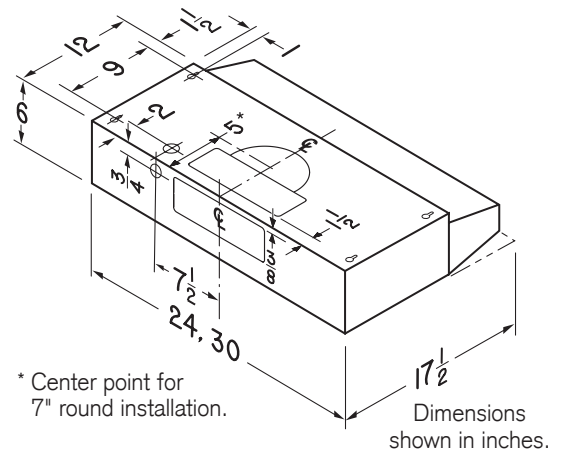

† Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified.

HVI PERFORMANCE						
Duct Orientation	Size	Damper	Sones		CFM	
			Normal	High	Normal	High 0.1 in. w.g.
Vertical - Rectangular	3¼ in. x 10 in.	Included	4.0	7.5	110	160
Horizontal - Rectangular	3¼ in. x 10 in.	Included	4.5	7.0	100	160
Vertical - Round	7 in.	Sold separately	3.5	6.5	140	190

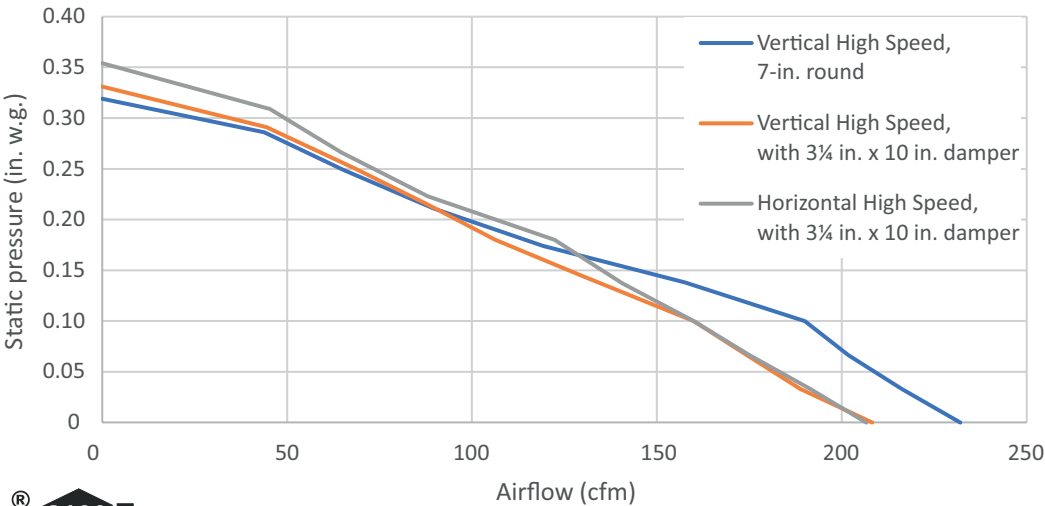

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.