

# FISHER & PAYKEL

## DATA SHEET 36" Professional ActiveSmart™ Fridge – French Door

Model no:  
**RF201ACUSX1**  
(refer page 2 for metric measurements)

| Product Dimensions                                                        | in        |
|---------------------------------------------------------------------------|-----------|
| Ⓐ Overall height* of fridge                                               | 70 11/16" |
| Ⓑ Overall width of fridge                                                 | 35 7/16"  |
| Ⓒ Depth of fridge door and gasket (excludes handle)                       | 2 3/4"    |
| Ⓓ Depth of fridge door and chassis (excludes handle)                      | 27 3/8"   |
| Ⓔ Depth of fridge chassis (does not include fridge door)                  | 24 19/32" |
| Ⓕ Height from bottom datum to top of fridge door                          | 69 3/4"   |
| Ⓖ Height of feet (adjustable)                                             | 15/16"    |
| Ⓗ Height from bottom datum to top of top handle                           | 55 25/32" |
| Ⓘ Height from bottom datum to bottom of top handle                        | 27 1/32"  |
| Ⓢ Height from bottom datum to bottom of top door                          | 25 1/16"  |
| Ⓚ Height from bottom datum to top of bottom door                          | 24 1/2"   |
| Ⓛ Height from bottom datum to centre of bottom handle                     | 22"       |
| Ⓜ Handle thickness (not including standoffs)                              | 1"        |
| Ⓝ Height from bottom datum to bottom of bottom door                       | 21/32"    |
| Ⓟ Depth of handle (measured from front of door)                           | 2 5/16"   |
| Ⓡ Depth of door (open at 90°) (measured from front of door)               | 15 15/16" |
| Ⓣ Depth of drawer (open) (measured from front of drawer) excluding handle | 14 3/4"   |
| Ⓤ Rotation of door (open) (measured from front of door)                   | 138°      |


\* Includes mounted feet

| Minimum Clearances                                                      | in      |
|-------------------------------------------------------------------------|---------|
| Minimum height of cavity                                                | 71 1/4" |
| Minimum side clearance installed flush with chassis                     | 25/32"  |
| Side clearance (hinge side) – installed flush with door – full rotation | 5 5/16" |
| Rear clearance (including evaporator tray)                              | 1 3/16" |

INDICATES PRODUCT DATUM .....  
INDICATES CLEARANCES .....

DATE: 20.02.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

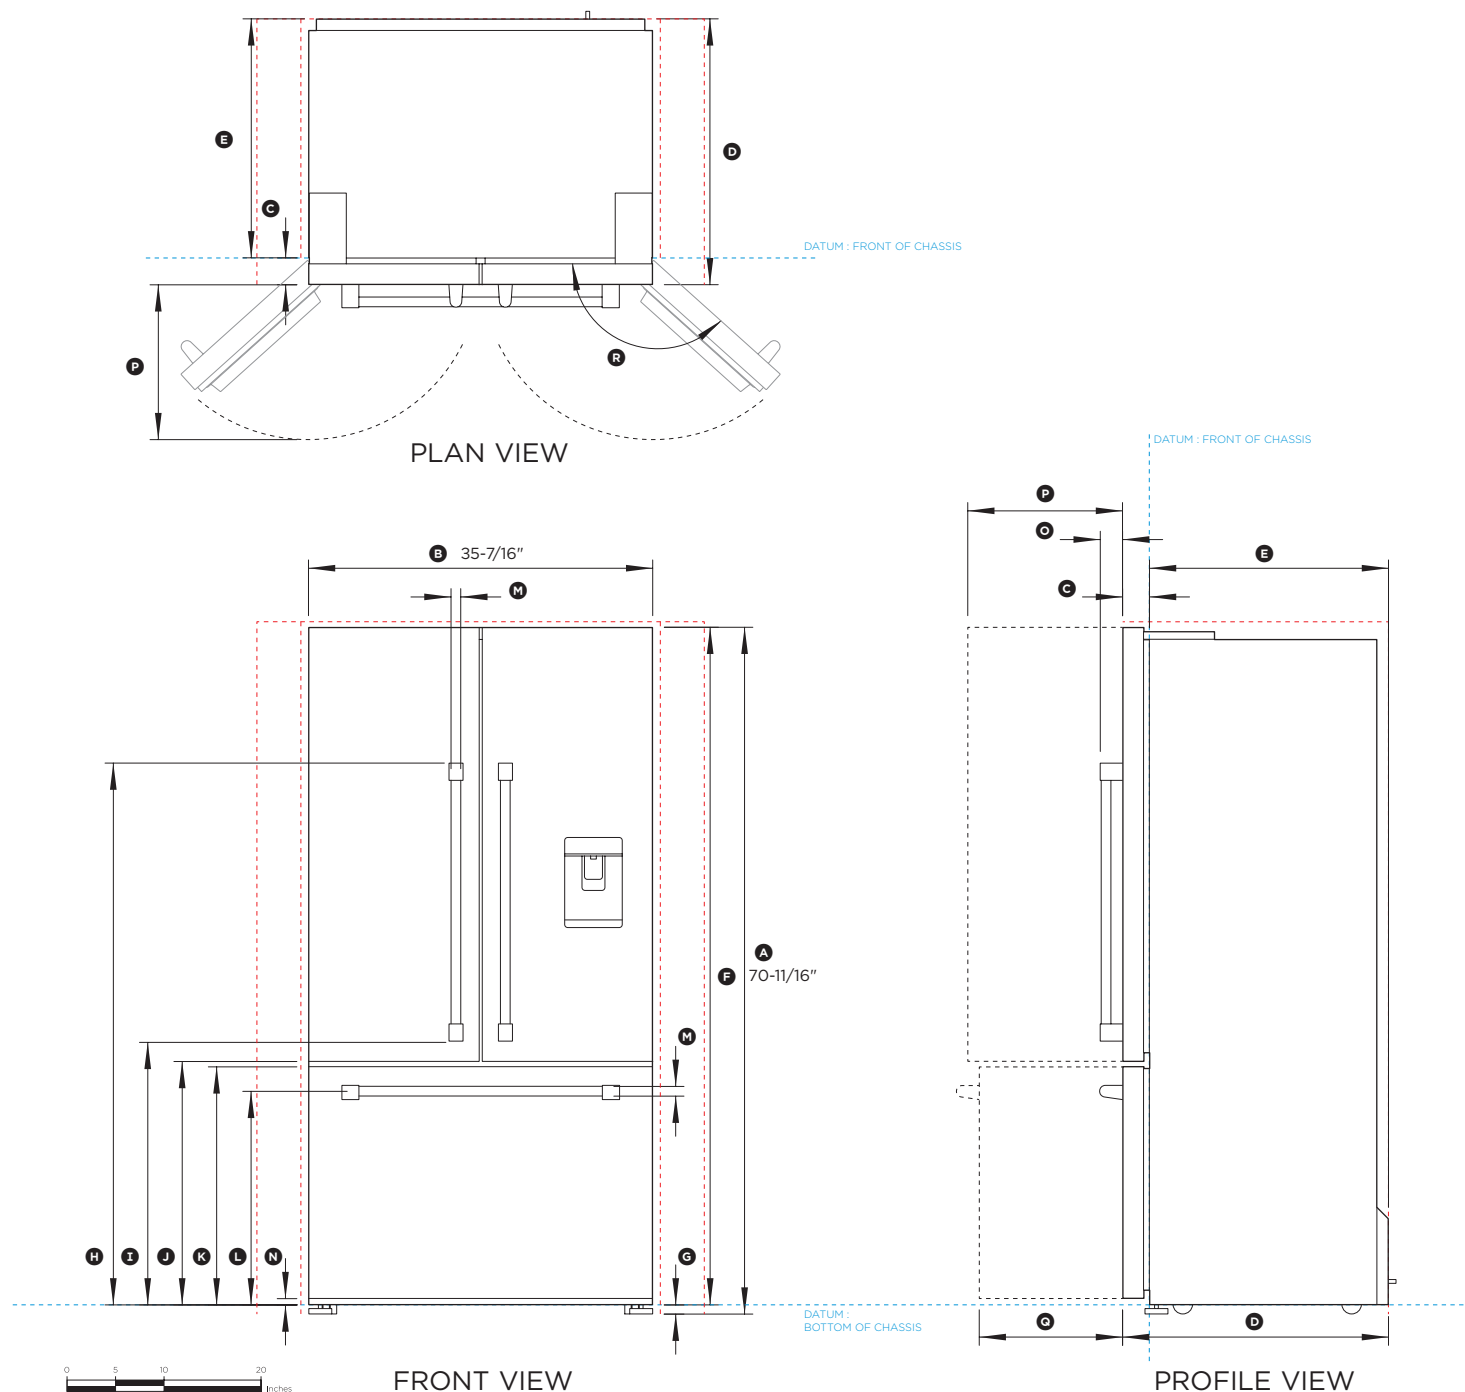

# FISHER & PAYKEL

## DATA SHEET 36" Professional ActiveSmart™ Fridge – French Door

Model no:

**RF201ACUSX1**

(refer page 1 for imperial measurements)

| Product Dimensions                                                        | mm   |
|---------------------------------------------------------------------------|------|
| Ⓐ Overall height* of fridge                                               | 1795 |
| Ⓑ Overall width of fridge                                                 | 900  |
| Ⓒ Depth of fridge door and gasket (excludes handle)                       | 70   |
| Ⓓ Depth of fridge door and chassis (excludes handle)                      | 695  |
| Ⓔ Depth of fridge chassis (does not include fridge door)                  | 625  |
| Ⓕ Height from bottom datum to top of fridge door                          | 1771 |
| Ⓖ Height of feet (adjustable)                                             | 24   |
| Ⓗ Height from bottom datum to top of top handle                           | 1416 |
| Ⓘ Height from bottom datum to bottom of top handle                        | 686  |
| Ⓢ Height from bottom datum to bottom of top door                          | 636  |
| Ⓚ Height from bottom datum to top of bottom door                          | 622  |
| Ⓛ Height from bottom datum to centre of bottom handle                     | 558  |
| Ⓜ Handle thickness (not including standoffs)                              | 25   |
| Ⓝ Height from bottom datum to bottom of bottom door                       | 17   |
| Ⓟ Depth of handle (measured from front of door)                           | 58   |
| Ⓡ Depth of door (open at 90°) (measured from front of door)               | 405  |
| Ⓣ Depth of drawer (open) (measured from front of drawer) excluding handle | 375  |
| Ⓡ Rotation of door (open) (measured from front of door)                   | 138° |

\* Includes mounted feet

| Minimum Clearances                                                      | mm   |
|-------------------------------------------------------------------------|------|
| Minimum height of cavity                                                | 1810 |
| Minimum side clearance installed flush with chassis                     | 20   |
| Side clearance (hinge side) – installed flush with door – full rotation | 135  |
| Rear clearance (including evaporator tray)                              | 30   |

INDICATES PRODUCT DATUM

INDICATES CLEARANCES

DATE: 20.02.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

