

Potenza


Wallmount hood

Specification sheet



Learn
more

MEASUREMENTS

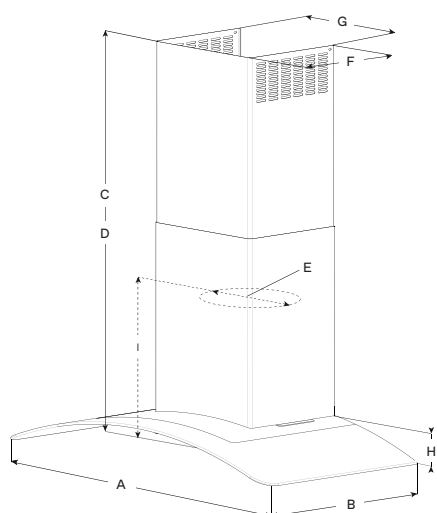

	EPT430S3	EPT436S3
A	30" (76.2 cm)	36" (91.4 cm)
B	19 1/16" (50 cm)	
C*	Min: 24" (61cm) Max: 36 5/8" (93 cm)	
D**	Min: 20 3/8" (51.7 cm) Max: 32 9/16" (82.7 cm)	
E	6" (15.2 cm)	
F	10 3/4" (27.3 cm)	
G	13 1/16" (33.2 cm)	
H	3 3/4" (9.4 cm)	
I	14 1/2" (36.8 cm)	15 7/16" (39.1 cm)

*Ductless (recirculating)

** Ducted version

DESCRIPTION

Potenza combines curved glass and stainless steel to create a light and airy environment, which is perfect for any contemporary kitchen. The flowing designs of 30" or 36" widths come with a powerful 400 CFM blower that can support the cooking demands of most kitchens. Stainless steel look, multiple backlight color touch controls illuminate in elegant white, green, blue, or red, and manage multiple functions including LED lighting and 4-speed blower. Multiple clicking sound options are also available.

Potenza also features a telescopic chimney for up to 8'5" ceilings. Designed for standard ducted installation, Potenza can also be installed as a recirculating system using the kit available as an accessory.



FEATURES



3x layer mesh



Led light



CFM reduction system



GENERAL PROPERTIES

Width	30"	36"
Model	EPT430S3	EPT436S3
Dimensions	30"W x 19 11/16"D x min:20 3/8" max:36 5/8"H	36"W x 19 11/16"D x min:20 3/8" max:36 5/8"H
Blower Type ¹ (Internal)	400 CFM (4-speed)	
Noise (Min-max sones) ¹	0.4-5.0 Sones	
Electrical	120V-60Hz, 301W	
Illumination	2 LED, 2.1W, 3000K, 235 Lumen	
Finish	Stainless Steel	
Controls	Electronic touch controls with adjustable color backlight	
Filters	Dishwasher-safe, anodized aluminum mesh filter	
Installation type	Ducted or recirculating wit kit (sold separately)	
Duct transition	6" round with backdraft damper (top only)	

KITS

Recirculating kit	KIT0102875 (contans 6" deflector, 3 flat carbon filters & clips)
Chimney extension	KIT0100315 (Reaches ceiling heights 8'5"-12'1"(ducted), 9'1"-12'5"(recirculating)) KIT01609/1 (Reaches ceiling heights 7'5"-10'3"(ducted), 8'2"-10'11"(recirculating))
Upgrade filter	GF04YB (contains 1 Stainless Steel Microhole filter)

WARRANTY:² Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on elica.com



The product images shown are for illustration purposes only and may not be an exact representation of the product.
¹ CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

² For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.