

## 36" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS SOLID DOOR

### TR-36RBF-R/L-SS-A

TR-36RBF-R-SS-A (Right hinged)

TR-36RBF-L-SS-A (Left hinged)

#### FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.
- Balanced refrigeration system with cascade airflow that enables even temperature throughout to keep food fresh.
- Built-in Ice Maker produces up to 3lbs./day of prism shaped ice with 5 lbs. storage capacity.
- Dual evaporator and dual compressor enable dedicated cooling systems for each zone.

#### ORGANIZATION

##### Refrigerator

- 4 adjustable/removable stainless steel encapsulated glass half-shelves.
- 2 adjustable/removable door bins that allow for additional storage/organization.
- 1 adjustable/ removable stainless steel encapsulated glass full-width shelf.
- 1 fixed stainless steel encapsulated full-width glass shelf.
- 1 full-extension/full-width drawer with 2 removable dividers.
- 2 half-width, deep drawers with 2 removable dividers, ideal for produce storage.

##### Freezer

- 2 tiered drawers with nested pull-out drawer and top shelf.
- Built-in Ice Maker.

#### BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at [true-residential.com](http://true-residential.com).

CUSTOMIZATION



#### SPECIFICATIONS

Dimensions\* (w x h x d) 36" x 84" x 24"

Cutout Dimensions (w x h x d)

Flush Opening 36¼" x 84¼" x 26"

Standard Opening 35½" x 83¾" x 24"

Total Capacity (cu. ft.) 22.1

Capacity (cu. ft.) – Refrigerator 17

Capacity (cu. ft.) – Freezer 5.1

Temperature Range – Refrigerator 33°F – 42 °F

Temperature Range – Freezer -4°F – 4°F

Water Supply ¼" O.D. braided stainless steel or PEX tubing (¼" O.D. lines and fittings not included). **Note:** Copper line is not recommended.

Flow Rate (gpm/lpm) 0.5 / 1.89

Operating Pressure psi (kPa) 30 (207) – 100 (689)

Incoming Water Temperature 33 – 100°F (0.6 – 38°C)

Weight (lbs.) 720

Voltage 115/60/1  115/60/1 NEMA-5-15R

Amps 1.8

Annual Energy Consumption (kwh) 568

Refrigerant Type r600a


Power Cord Length (ft.) 9

Energy Star Rated Yes

\*Dimensions may vary +/- 1/8"

# 36" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS SOLID DOOR

## TR-36RBF-R/L-SS-A

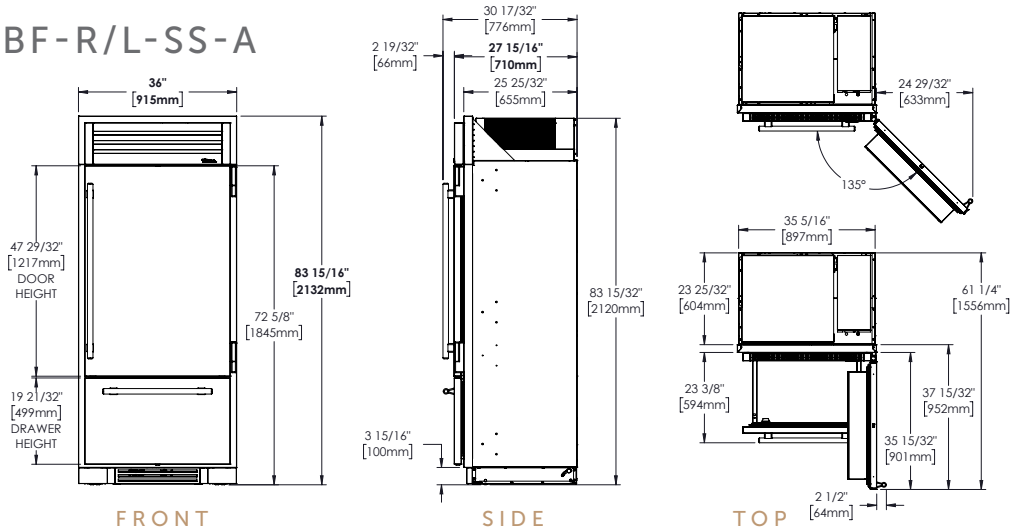

## OPENING DIMENSIONS


### FLUSH OPENING

WIDTH	HEIGHT	DEPTH
36 1/4"	84 1/4"	26"

### STANDARD OPENING\*

WIDTH	HEIGHT	DEPTH
35 1/2"	83 3/4"	24"

\*Standard Opening dimensions apply to models produced after April 2024. Please consult factory for clarification / questions.

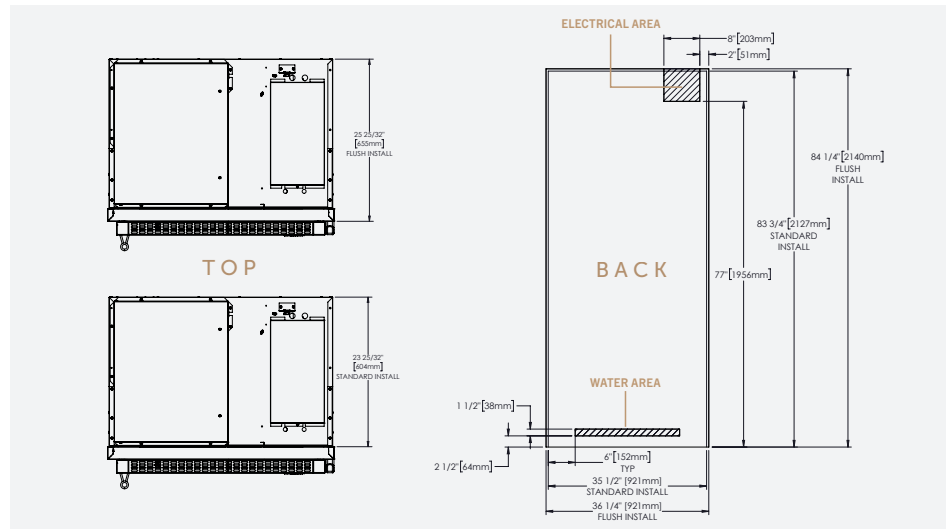

## MODEL OPTIONS

MODEL	FINISH
TR-36RBF-R-SS-A	Stainless solid door right-hinged
TR-36RBF-L-SS-A	Stainless solid door left-hinged

## ACCESSORIES (OPTIONAL)

- Joining kit
- Side panel(s)
- 90° door stop
- Full size anti-condensation pad

## WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7-12 year (parts only – sealed system on registered products)

