

# Asti


## Insert hood

Specification sheet



Learn  
more

### MEASUREMENTS

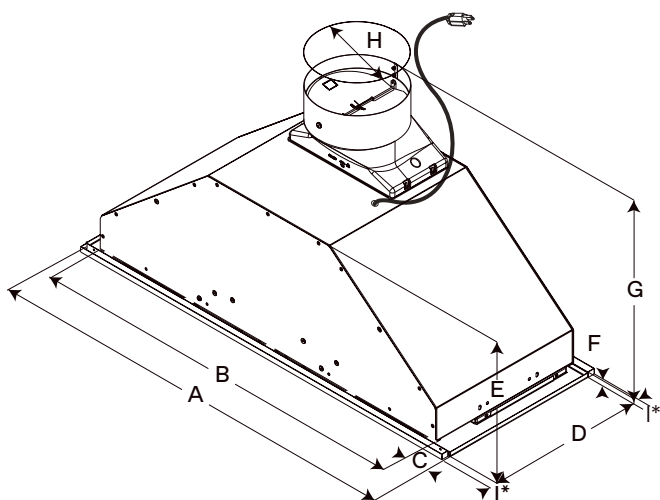

|    | EAS422SS            | EAS428S1          |
|----|---------------------|-------------------|
| A  | 22 1/2" (57.1 cm)   | 28 1/4" (71.8 cm) |
| B  | 19 11/16" (50.8 cm) | 26" (66 cm)       |
| C  | 1 3/8" (3.5 cm)     | 1 1/8" (2.8 cm)   |
| D  | 10 3/4" (27.2 cm)   |                   |
| E  | 9 1/2" (24.2 cm)    |                   |
| F  | 5/16" (.85 cm)      |                   |
| G  | 14 9/16" (37 cm)    |                   |
| H  | 6" (15 cm)          |                   |
| I* | 1/2" (1.2 cm)       |                   |

I\*- Stainless steel spacers must be installed and used when cabinet depth is greater than 12"

### DESCRIPTION

Asti is designed for discreet mounting inside cabinetry, fits perfectly into 12" deep cabinetry, and is ideal for kitchens where space is limited or the range hood needs to be out of sight.

Asti comes equipped with a powerful 400 CFM blower that can handle most cooking needs. Convenient Backlit Electronic Push Button Controls operate the 3-speed blower and LED lighting, while dishwasher-safe anodized aluminum mesh filters offer easy maintenance. Asti is designed for standard ducted or recirculating installation.



### FEATURES

 3x layer mesh

 Led light



#### GENERAL PROPERTIES

|                                        |                                                    |                                                  |
|----------------------------------------|----------------------------------------------------|--------------------------------------------------|
| Width                                  | 22"                                                | 28"                                              |
| Model                                  | EAS422SS                                           | EAS428S1                                         |
| Dimensions                             | 22 1/2"W x 10 3/4"D x 9 1/2"H                      | 28 1/4"W x 10 3/4"D x 9 1/2"H                    |
| Blower Type <sup>1</sup><br>(Internal) | 400 CFM (3-speed)                                  |                                                  |
| Noise<br>(Min-max sones) <sup>1</sup>  | 0.4-5.0 Sones                                      |                                                  |
| Electrical                             | 120V-60Hz, 289W                                    |                                                  |
| Illumination                           | 2 LED, 2.1W, 4000K, 235 Lumen                      |                                                  |
| Finish                                 | Stainless Steel                                    |                                                  |
| Controls                               | Backlit electronic push buttons                    |                                                  |
| Grease filters                         | 1 Dishwasher-Safe, Anodized aluminum mesh filter   | 2 Dishwasher-Safe, Anodized aluminum mesh filter |
| Installation type                      | Ducted or recirculating with kit (sold separately) |                                                  |
| Duct transition                        | 6" round with backdraft damper (top only)          |                                                  |

#### KITS

|                   |                                      |                                     |
|-------------------|--------------------------------------|-------------------------------------|
| Recirculating kit | KIT02770 (contains 2 carbon filters) |                                     |
| CFM reduction     | KIT0175561 (achieves <300 CFM)       |                                     |
| 30" hood liner    | Not Available                        | KIT02773 (29"W x 17 1/2"-20 1/2" D) |
| 35" hood liner    | Not Available                        | KIT02774 (35"W x 17 1/2"-20 1/2" D) |

#### WARRANTY:<sup>2</sup>

**Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on [elica.com](http://elica.com)**



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.