


1.9 Cu. Ft. Over-The-Range Microwave with Sensor Cook

Over-The-Range Microwave

Version: 10/25



Product Specifications Cooking Controls Microwave Cooking Clock Yes Beverage Yes Defrost Time Melt / Soften Yes Yes Defrost Weight Yes Popcorn Yes Potato Yes Reheat Yes **Ventilation System** Exhaust Fan Speeds Sensor Cooking Yes Yes Veggies Maximum Air Flow Capacity 400 CFM Minimum Air Flow Capacity 105 CFM Grease Filter Included **Microwave Control Features** + 10 Seconds Grease Filter Quantity Yes - One Touch 2 Grease Filter Dishwasher Safe Yes + 30 Seconds Yes - One Touch Removable Grease Filter Quick Start Yes - One Touch Yes Charcoal Filter Included Yes Ducted Vent Yes **Display Ductless Vent** Yes Control Location Bottom Display Interface Color White **Additional Settings** Display Type Capacitive Touch Child Lock Yes Clock Display On / Off Yes **Internal Specifications** Clock Settings Yes Interior Color White Demo On / Off Yes Interior Light Quantity 1 Setting Turntable On / Off Yes Interior Light Type LED Setting Weight Lb / Kg Yes Interior Light Wattage 1.2 Watts Surface Cooking Light Yes Turntable Diameter 13 3/5" Timer On / Off Yes Turntable Material Glass Vent Fan Yes **Dimensions and Volume** Exterior Height 15 5/8" Side-Swing Door Width 29 7/8" Zero Clearance Door Opening Yes 15 3/4" Depth With Door 90° Open 44 3/8" **Surface Light System** Microwave Interior Height 10 9/16" Lighting Type LED Microwave Interior Width 21 3/32" Microwave Interior Depth Number of Lights 2 14 9/16" Number of Light Settings 3 Microwave Capacity 1.9 Cu. Ft. **Electrical Specifications** Installation Amps @ 120 Volts Power Supply Connection Location Top Center 13.5 Amps Connected Load @ 120V 1.55 kW Voltage Rating 120 V

1000 Watts

Watts @ 120 Volts

1.9 Cu. Ft. Over-The-Range Microwave with Sensor Cook 5560

Version: 10/25

General Specifications


Right to Repair Details

General Speemeations		
Prop 65 Label	Yes	
Warranty - Labor	1 Year	
Warranty - Parts	1 Year	

Right to Repair

Partially Available - Visit frigidaire.ca/right-torepair for more information Version: 10/25

Installation Diagram

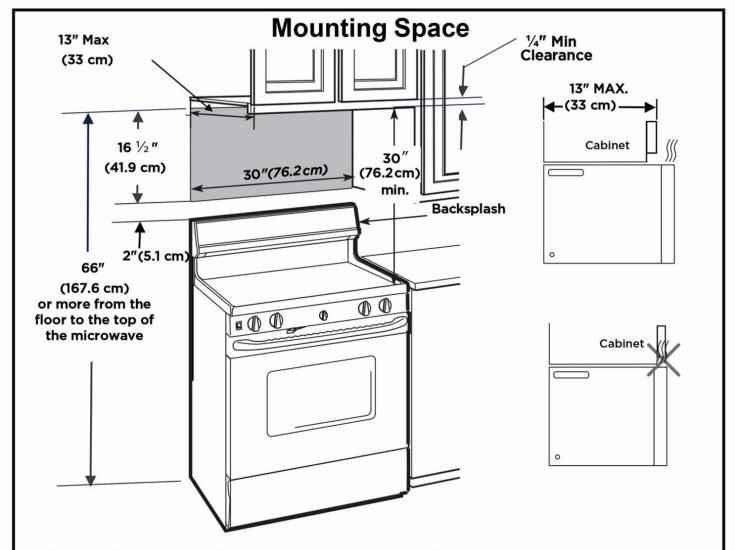

- The space between the cabinets must be 30" (76.2 cm) wide and free of obstructions.
- If you are going to vent your microwave oven to the outside, see Hood Exhaust Section for exhaust duct preparation
- When installing the microwave oven beneath smooth, flat cabinets, be careful to follow the instructions on the top cabinet template for power cord clearance.
- · As a guide to installation, see page 26 for Mounting Template Information.
- If the cabinet depth, including the cabinet doors, is more than 13", then the unit must be spaced out from wall using adequate materials supporting 150 lbs to allow proper top vent air exhaust/ intake.