



30" Induction Cooktop

Induction Cooktop

Available Products: PCCI3080AF

Available Colors: Stainless Steel

Version: 10/25

Product Specifications

Cooktop		Cooktop Performance				
Cooking Surface Type	Smooth	Right Front Element Burner Size	11"			
Element On Indicator Light	Yes	Left Front Element Burner Size	7"			
Hot-Surface Indicator Light	Yes	Left Rear Element Burner Size	7"			
		Center Rear Element Burner Size	6"			
Controls		D'ALE (EL LD	3,600 / 5,200 Watts			
Sabbath Mode	No	Right Front Element Burner	(Boost)			
		Left Front Element Burner	1,800 / 2,600 Watts			
Exterior		Left Front Element Burner	(Boost)			
Backlit Knobs	Yes	Left Rear Element Burner	1,800 / 2,600 Watts			
Dacklit Kilous	165	Left Real Element Durner	(Boost)			
Electrical Specifications		Center Element Burner	1,450 / 2,000 Watts			
Electrical Specifications	20.4	Genter Element Burner	(Boost)			
Amps @ 240 Volts	30 Amps					
Voltage Rating	240 V	——— Display				
Watts @ 120 Volts	7.5 Watts	— Control Location	Front			
		Display Type	Mechanical			
General Specifications						
Frigidaire Fit Promise	Yes	— Dimensions and Volume				
ranty - Labor 1 Year		——— Height	2 7/8"			
Warranty - Parts	1 Year	Width	30 5/8"			
		Depth	21 3/8"			
Safety Certifications and Approvals		Cutout Height	3 5/8"			
UL Listed	Yes	Minimum Cutout Width	28 1/2"			
		Minimum Cutout Depth	19 5/8"			
		Maximum Cutout Width	29 7/8"			
		Maximum Cutout Depth	20 1/2"			
		Installation				
		Installed Over a Wall Oven	Yes			
		ilistalieu Ovel a Wali Oveli	165			
		Certifications and Approvals				
			V			
		ADA Compliant	Yes			
		Dile Dine				
		Right to Repair Details				

Right to Repair

Available - Visit frigidaire.ca/right-to-


repair for more information

30" Induction Cooktop 5528

Available Products: PCCI3080AF Available Colors: Stainless Steel

Version: 10/25

Installation Diagram

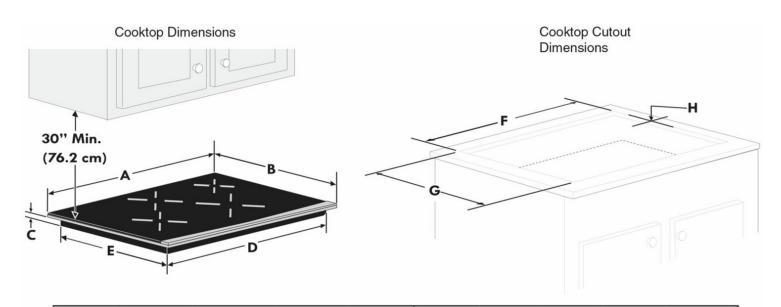

COOKTOP DIMENSIONS				CUTOUT DIMENSIONS					
A. WIDTH	B. DEPTH	C. HEIGHT	D. WIDTH	E. DEPTH	F. WIDTH		G. DEPTH		H. HEIGHT
ec .					Min.	Max.	Min.	Max.	
305/8 (77.8)	213/8 (54.4)	27/8 (7.3)	281/4 (71.8)	193/8 (49.2)	281/2 (72.4)	297/8 (75.9)	195/8 (49.9)	201/2 (52.1)	35/8 (9.2)