

FISHER & PAYKEL

DATA SHEET Integrated Rangehood

Model no:

HPB3011-4, HPB3011-6

(refer page 2 for metric measurements)

Product Dimensions	inches
Ⓐ Overall height of rangehood including duct adapter	16 1/4
Ⓑ Overall width of rangehood	28 3/4
Ⓒ Overall depth of rangehood	11
Ⓓ Thickness of flange	3/32
Ⓔ Corner radius of flange	1/8
Ⓕ Overall height of chassis excluding duct adapter	15
Ⓖ Height of chassis at side	4 1/4
Ⓜ Overall width of chassis	27 9/16
Ⓣ Width of chassis blower housing	13
Ⓛ Depth of chassis including mounting brackets	10 5/16
Ⓚ Depth of chassis excluding mounting brackets	9 15/16
Ⓛ Outside diameter of duct adapter	8 1/4
Ⓜ Offset of duct outlet forward from centre	3/8
Ⓜ Distance from front of flange to LED strip	13/16
Ⓞ Depth of LED strip	1 1/4
Ⓞ Width from centreline to powercord	7 5/16
Ⓞ Depth from centreline to powercord	3 11/16

Cutout Dimensions	inches
Width of cutout (centred to product)	27 3/4
Depth of cutout (centred to product)	10 1/16
Thickness of cabinetry surface	5/8 - 1 1/2


Height from base of product to cooking surface	inches
Minimum - refer to cooktop/range specifications	
Maximum recommended	42

Electrical Requirements	
Supply	120V 60Hz
Service	15 amp circuit
LED color temperature	3000K
Unit Weight	46lb


INDICATES PRODUCT DATUM -----
CUTOUT DIMENSIONS -----
INDICATES CABINTRY CLEARANCES -----

DATE: 18.05.2021


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

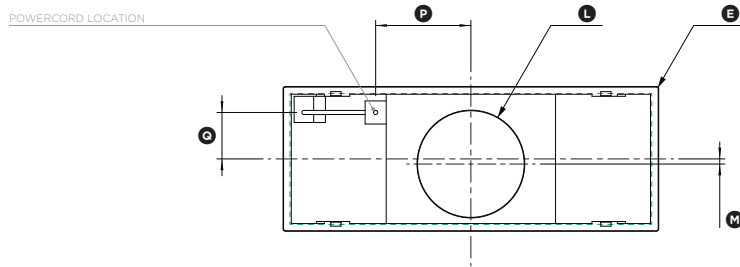


PLAN VIEW

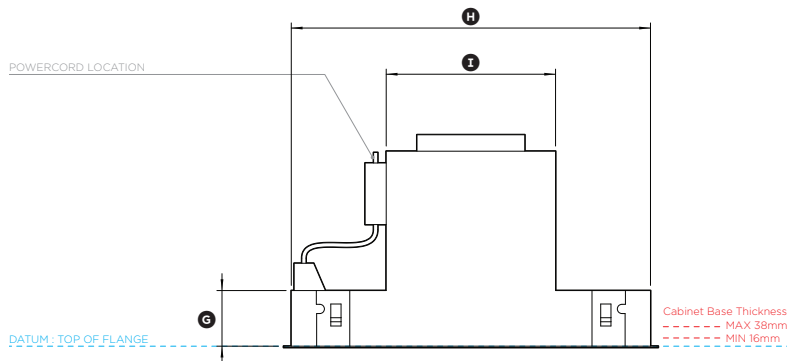


FRONT VIEW

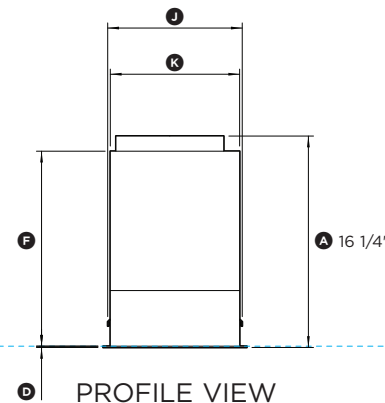

PROFILE VIEW

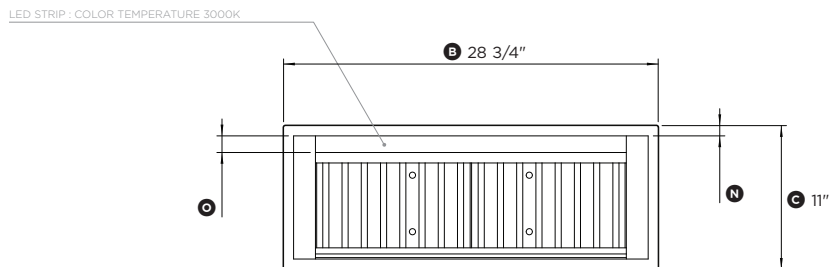

BOTTOM VIEW



FISHER & PAYKEL

DATA SHEET Integrated Rangehood

Model no:

HPB3011-4, HPB3011-6

(refer page 1 for imperial measurements)

Product Dimensions	mm
Ⓐ Overall height of rangehood including duct adapter	412
Ⓑ Overall width of rangehood	730
Ⓒ Overall depth of rangehood	280
Ⓓ Thickness of flange	2.5
Ⓔ Corner radius of flange	3.5
Ⓕ Overall height of chassis excluding duct adapter	380
Ⓖ Height of chassis at side	108
Ⓜ Overall width of chassis	700
Ⓣ Width of chassis blower housing	330
Ⓛ Depth of chassis including mounting brackets	262
Ⓚ Depth of chassis excluding mounting brackets	252
Ⓛ Outside diameter of duct adapter	210
Ⓜ Offset of duct outlet forward from centre	10
Ⓜ Distance from front of flange to LED strip	20
Ⓢ Depth of LED strip	32
Ⓢ Width from centreline to powercord	186
Ⓢ Depth from centreline to powercord	93

Cutout Dimensions	mm
Width of cutout (centred to product)	705
Depth of cutout (centred to product)	255
Thickness of cabinetry surface	16-38


Height from base of product to cooking surface	mm
Minimum - refer to cooktop/range specifications	
Maximum recommended	1067

Electrical Requirements	
Supply	120V 60Hz
Service	15 amp circuit
LED color temperature	3000K
Unit Weight	17kg


INDICATES PRODUCT DATUM -----
CUTOUT DIMENSIONS -----
INDICATES CABINETY CLEARANCES -----

DATE: 18.05.2021


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

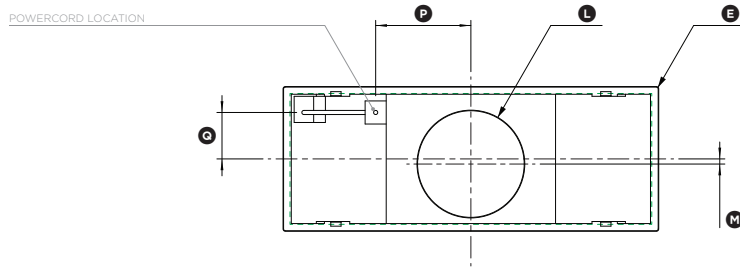


PLAN VIEW

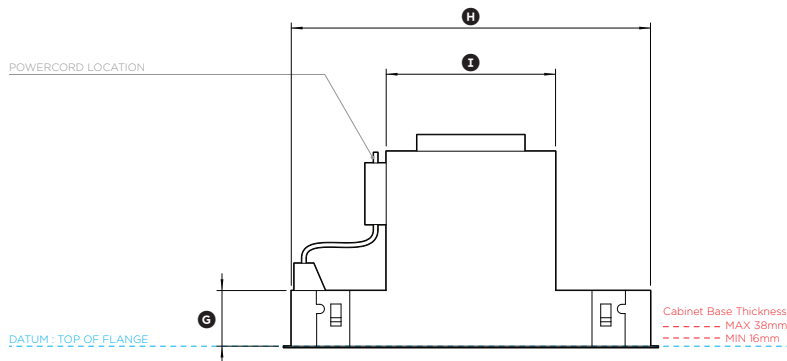

FRONT VIEW

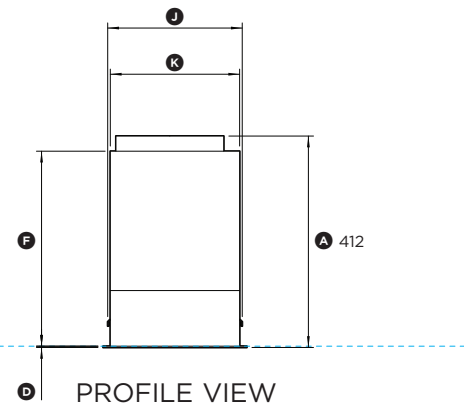

PROFILE VIEW

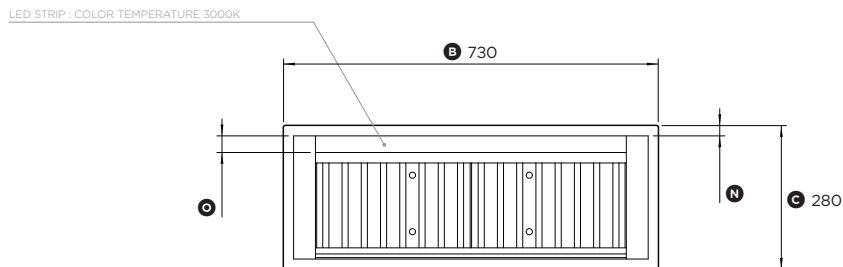

BOTTOM VIEW

