

# FISHER & PAYKEL

## DATA SHEET 36" Pro Induction Cooktop

Model no:

**CI365PTX4**

(refer page 2 for metric measurements)

| Product Dimensions                                     | in      |
|--|---------|
| Ⓐ Overall height of cooktop including conduit junction | 3 7/16" |
| Ⓑ Overall width of cooktop                             | 36"     |
| Ⓒ Overall depth of cooktop                             | 21"     |
| Ⓓ Height of chassis including conduit junction         | 2 7/8"  |
| Ⓔ Width of chassis                                     | 33 3/4" |
| Ⓕ Depth of chassis                                     | 19 1/8" |
| Ⓖ Height from benchtop to top of cooktop               | 9/16"   |
| Ⓗ Distance from front edge of cooktop to chassis       | 7/8"    |
| Ⓘ Distance from rear edge of cooktop to chassis        | 1"      |
| Ⓢ Distance from side edges of cooktop to chassis       | 1 1/8"  |

| Cutout Dimensions                                 | in       |
|---|----------|
| Cutout width*                                     | 34 1/4"  |
| Cutout depth                                      | 19 7/16" |
| Distance from front of cutout to front of cooktop | 11/16"   |

\*NOTE: Cutout position is centered to the cooktop width


| Minimum Clearances   | in      |
|--|---------|
| Minimum clearance from side edges of cutout to nearest combustible surface   | 1 3/16" |
| Minimum clearance from rear edge of cutout to nearest combustible surface  | 1 3/8"  |
| Minimum distance from front edge of cutout to front edge of countertop   | 1 3/8"  |
| Minimum clearance from top of countertop to top of any appliance, companion product or obstruction below cooktop** | 3"      |
| Minimum clearance from glass surface to:   |         |
| - overhead cabinet centered above cooktop (unprotected)  | 30"     |
| - overhead cabinet centered above cooktop (protected)  | 24"     |
| - rangehood  | 25 5/8" |
| Minimum clearance from benchtop to overhead cabinet not directly above the cooktop                                 | 17 3/4" |
| Minimum ventilation gap between bottom of bench and top of cabinetry fronts (not illustrated)                      | 3/16"   |

\*\*NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.


INDICATES CUTOUT -----  
INDICATES CABINETRY / PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

DATE: **08.12.2021**



IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

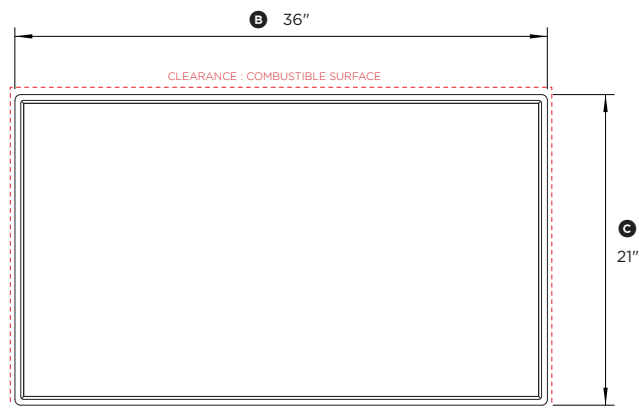

PLAN VIEW

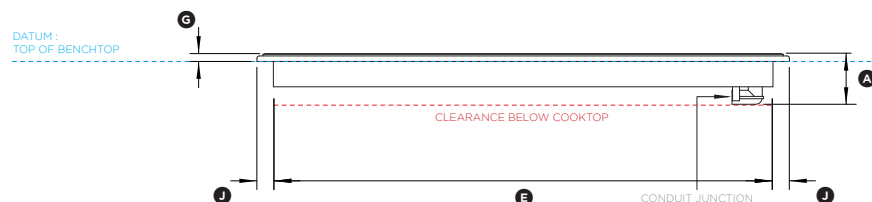

FRONT VIEW

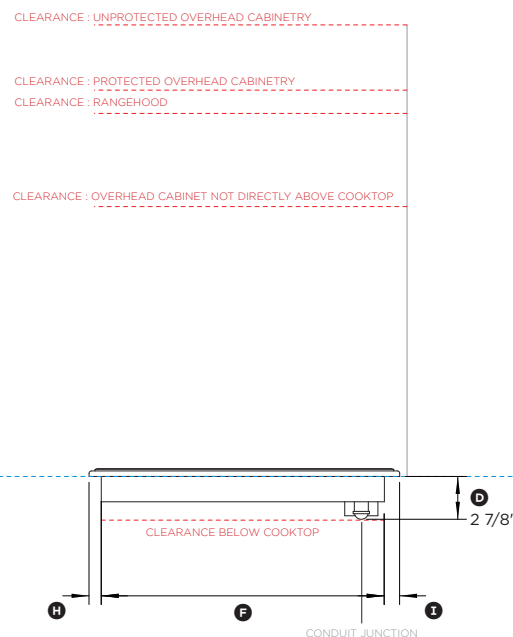

PROFILE VIEW

# FISHER & PAYKEL

## DATA SHEET 36" Pro Induction Cooktop

Model no:

**CI365PTX4**

(refer page 1 for imperial measurements)

| Product Dimensions                                     | mm  |
|--|-----|
| Ⓐ Overall height of cooktop including conduit junction | 87  |
| Ⓑ Overall width of cooktop                             | 914 |
| Ⓒ Overall depth of cooktop                             | 533 |
| Ⓓ Height of chassis including conduit junction         | 73  |
| Ⓔ Width of chassis                                     | 858 |
| Ⓕ Depth of chassis                                     | 486 |
| Ⓖ Height from benchtop to top of cooktop               | 14  |
| Ⓜ Distance from front edge of cooktop to chassis       | 21  |
| Ⓨ Distance from rear edge of cooktop to chassis        | 26  |
| Ⓦ Distance from side edges of cooktop to chassis       | 29  |

| Cutout Dimensions                                       | mm  |
|---|-----|
| Cutout width*   | 870 |
| Cutout depth  | 494 |
| Distance from front of cutout to front of cooktop       | 17  |
| *NOTE: Cutout position is centered to the cooktop width |     |


| Minimum Clearances   | mm  |
|--|-----|
| Minimum clearance from side edges of cutout to nearest combustible surface   | 30  |
| Minimum clearance from rear edge of cutout to nearest combustible surface  | 35  |
| Minimum distance from front edge of cutout to front edge of countertop   | 35  |
| Minimum clearance from top of countertop to top of any appliance, companion product or obstruction below cooktop** | 75  |
| Minimum clearance from glass surface to:   |     |
| - overhead cabinet centered above cooktop (unprotected)  | 762 |
| - overhead cabinet centered above cooktop (protected)  | 610 |
| - rangehood  | 650 |
| Minimum clearance from benchtop to overhead cabinet not directly above the cooktop                                 | 450 |
| Minimum ventilation gap between bottom of bench and top of cabinetry fronts (not illustrated)                      | 4   |

\*\*NOTE: The oven installed below the cooktop MUST have a cooling fan. It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.


INDICATES CUTOUT -----  
INDICATES CABINETRY / PRODUCT DATUM -----  
INDICATES CABINETRY CLEARANCES -----

DATE: **08.12.2021**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

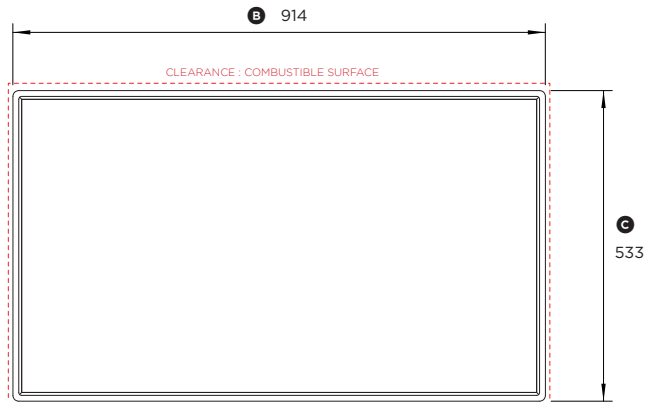


PLAN VIEW

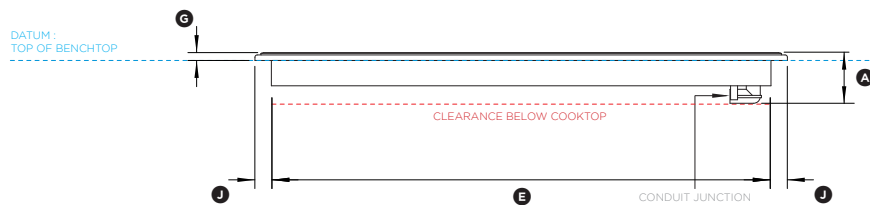

FRONT VIEW

CLEARANCE : UNPROTECTED OVERHEAD CABINETRY  
CLEARANCE : PROTECTED OVERHEAD CABINETRY  
CLEARANCE : RANGEHOOD  
CLEARANCE : OVERHEAD CABINET NOT DIRECTLY ABOVE COOKTOP

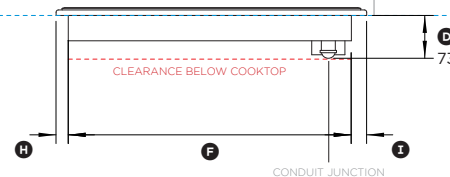

PROFILE VIEW

