



48"/36" CUSTOM HOOD LINERS

UXL6048YSS – 47⁷/₈" x 11¹/₂" x 22"UXL6036YSS – 35⁷/₈" x 11¹/₂" x 22"


PRODUCT DIMENSIONS

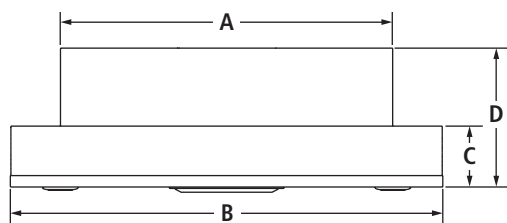

FRONT VIEW



SIDE VIEW

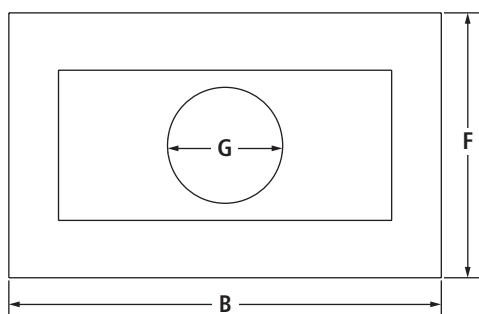


TOP VIEW

MODEL #		UXL6048YSS		UXL6036YSS	
		in	cm	in	cm
A	Width of upper portion of hood liner	27 ⁵ / ₈	70.1	27 ⁵ / ₈	70.1
B	Overall width	47 ⁷ / ₈	121.6	35 ⁷ / ₈	91.1
C	Height from hood liner to hood support	5 ¹ / ₈	12.8	5 ¹ / ₈	12.8
D	Overall height	11 ¹ / ₂	29.2	11 ¹ / ₂	29.2
E	Depth of upper portion of hood liner	12 ³ / ₈	31.4	12 ³ / ₈	31.4
F	Overall depth	22	55.9	22	55.9
G	Vent collar diameter	10	25.4	10	25.4


48"/36" CUSTOM HOOD LINERS

UXL6048YSS – 47⁷/₈" x 11¹/₂" x 22"UXL6036YSS – 35⁷/₈" x 11¹/₂" x 22"

OPENING/CLEARANCE DIMENSIONS

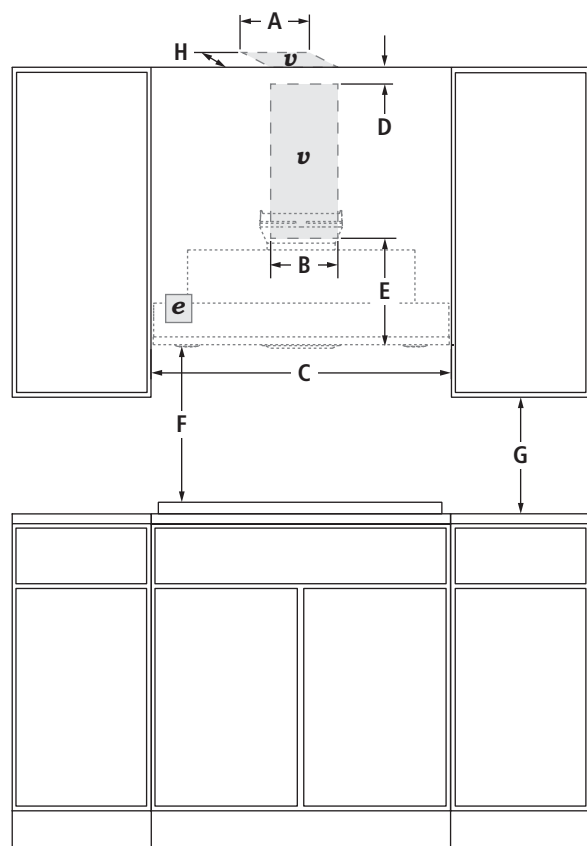

FRONT VIEW

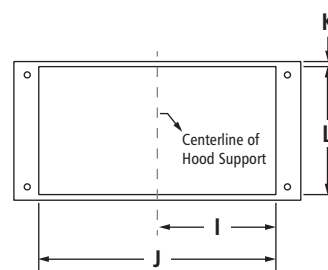

CUTOUT VIEW

ELECTRICAL REQUIREMENTS

120 volt, 60 Hz, AC only, 15-amp fused, electrical circuit is required.

VENTING REQUIREMENTS

An internal or in-line (external) blower motor system is required.
The hood is factory set for venting through the roof or wall.
Do not terminate the vent in an attic or other enclosed area.

LOCATION REQUIREMENTS

Custom built enclosure with hood liner support. Hood support must be able to support 75 lb (34.0 kg).

MODEL #		UXL6048YSS		UXL6036YSS	
		in	cm	in	cm
A	Width of vent entry location – ceiling option (min.-max.)	12-14	30.5-35.6	12-14	30.5-35.6
B	Width of vent entry location – wall option (min.-max.)	12-14	30.5-35.6	12-14	30.5-35.6
C	Width of cabinet opening (min.)	48	121.9	36	91.4
D	Height from vent entry location to ceiling – wall option (min.)	2	5.1	2	5.1
E	Height from hood to vent entry location – wall option (min.)	18	45.7	18	45.7
F	Suggested distance from hood to electric cooking surface (min.-max.)	24-36	61.0-91.4	24-36	61.0-91.4
	Suggested distance from hood to gas cooking surface (min.-max.)	30-36	76.2-91.4	30-36	76.2-91.4
G	Height from upper cabinet to countertop (min.)	18	45.7	18	45.7
H	Depth of vent entry location – ceiling option	17	43.2	17	43.2
I	Distance from centerline to cutout for hood liner	14	35.6	14	35.6
J	Width of cutout for hood liner	28	71.1	28	71.1
K	Depth from cutout to wall	4 ¹ / ₂	11.4	4 ¹ / ₂	11.4
L	Depth of cutout for hood liner	13	33.0	13	33.0
e	Terminal box location				
v	Recommended vent entry location				

JENN-AIR® DETAILED PLANNING DIMENSIONS

3 of 4

VENTILATION SELECTION CHART – COOKTOPS

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS		CUSTOM HOOD LINERS	OVER-THE-RANGE MICROWAVE OVENS
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS	JXD7030YS	UXL6048YSSA UXL6036YSSA	JMV9186W JMV8208W
INDUCTION COOKTOPS																	
36-INCH																	
JIC4536X – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
30-INCH																	
JIC4430X – 4 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
CONVENTIONAL GAS COOKTOPS																	
36-INCH (less than 60,000 BTU total)																	
JGC9536BD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	★	—	★	—	★	■
JGC1536AD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
JGC8536BD – 5 Burners	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
30-INCH (less than 60,000 BTU total)																	
JGC9430BD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	★	★	★	■
JGC1430AD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
JGC8430CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
CONVENTIONAL ELECTRIC COOKTOPS																	
36-INCH																	
JEC4536Y – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
JEC9536BD – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	★	—	★	—	★	■
JEC8536BD – 5 Elements	■	■	—	★	★	★	—	★	★	—	★	■	—	★	—	★	■
30-INCH																	
JEC4530Y – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■
JEC9530BD – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	★	★	★	★	★	■
JEC8430BD – 4 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	★	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections as actual product dimensions may vary.



JRC120072A 07/2012

JENN-AIR® DETAILED PLANNING DIMENSIONS

4 of 4

VENTILATION SELECTION CHART – RANGETOPS AND RANGES

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESOPING DOWNDRAFT SYSTEMS	CUSTOM HOOD LINERS		OVER-THE-RANGE MICROWAVE OVENS
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS JXD7030YS	UXL6048YSS UXL6036YSS 1200 or 600 CFMA	600 CFMB	JMV9186W JMV8208W
PRO-STYLE® RANGETOPS																	
48-INCH (more than 60,000 BTU total)																	
JGCP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
36-INCH (less than 60,000 BTU total)																	
JGCP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—
36-INCH (more than 60,000 BTU total)																	
JGCP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
30-INCH (less than 60,000 BTU total)																	
JGCP430WP – 4 Burners	■	★	★	■	■	■	■	■	■	■	■	■	■	—	★	★	—
48-INCH (less than 60,000 BTU total)																	
JGD8348CDP – 4 Burners & Grill Assembly	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
PRO-STYLE® DUAL-FUEL AND GAS RANGES																	
48-INCH (more than 60,000 BTU total)																	
JDRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
JGRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
36-INCH (less than 60,000 BTU total)																	
JDRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—
JGRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	★	★	—
36-INCH (more than 60,000 BTU total)																	
JDRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
JGRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
30-INCH (less than 60,000 BTU total)																	
JDRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—
JGRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	★	★	—
SLIDE-IN RANGES																	
Dual-Fuel and Gas Conventional (less than 60,000 BTU total)																	
JDS8860BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	■	■	—	★	★	■
JDS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8860BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	—	★	★	■
ELECTRIC CONVENTIONAL																	
JES8850CA – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	■	■	—	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.

B. Blower motor UXB0600DYS is rated for up to 65,000 BTUs and can be used with the rangetops and ranges indicated.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

Product dimension, cutout and installation specifications are provided for planning purposes only. Before installing any product, be sure to verify cutout dimensions and electrical/gas connections as actual product dimensions may vary.



JRC120072A 07/2012