





Stainless Solid

Key Features

- Converts to a refrigerator with the touch of a button
- Convection cooling system provides a quick cool down and consistent temperature
- Digital touch pad control with blue LED display
- Stainless steel cabinet, toe-kick, and full-wrap door
- Volume of 4.8 cu ft
- Freezer temperature range: -5°F to 5°F
- Refrigerator temperature range: 33°F to 70°F

- Bright white LED lighting
- Three full-extension chrome plated slide-out baskets
- Stainless steel handle (1/8" diameter)
- Field reversible door is shipped right-hand hinged
- Built-in or freestanding
- Four adjustable leveling legs


Model Details


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UOFZ124-SS01B	115 / 60	Field Reversible	Stainless Solid	125 lb


Accessories

Model	Description	Finish	Shipping Weight
ULAFREESTANDS	Freestanding Kit	Stainless	3 lb

Front Side Top






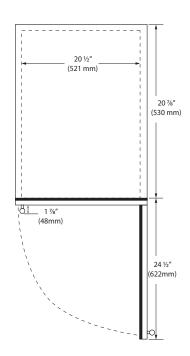


Specifications

Model	OFZ124	
Amps: Running	2.5	
Capacity: Bottle (12 oz)	N/A	
Capacity: Can (12 oz)	N/A	
Capacity: Volume (cu ft)	4.8	
Capacity: Wine Bottle (750 ml)	N/A	
Dimensions: Product Depth	22 ½" / 572 mm	
Dimensions: Product Height	34 ½" / 867 mm	
Dimensions: Product Width	23 ¹⁵ / ₁₆ " / 608 mm	
Energy Consumption: Avg. Per Year	390 kWh	
ENERGY STAR	Tier 1	
Product Weight: Max	125 lb	
Refrigerant Type:	R600a (1.23 oz)	
Sabbath (Star K Certified)	Yes	
Temperature Range (freezer)	-5°F - 5°F	
Temperature Range (refrigerator)	33°F - 70°F	

Back



Cabinet Cut-Out



Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



Installation Notes

- 24" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow









