





The Next Necessity™



Dimensions

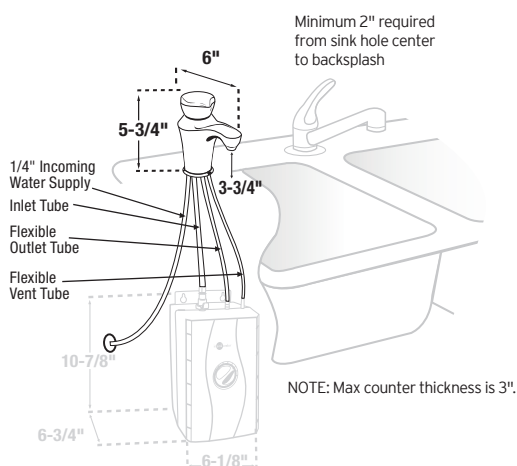

Job Specifications



Instant Hot Water Dispensers



H-Classic-SS

Easy-grip handle to dispense instant near-boiling 200°F water effortlessly

Submittal Sheet

- **Hot Only** - Dispenses near-boiling 200°F water
- Includes 2/3-gallon hot water tank
- Easy to adjust temperature control
- Tool-free tank connections and dry start protection to ease installation
- Provides 60 cups/hr of near-boiling water
- **We Come To You®** 3-Year In-Home Limited Warranty*
- 115 volts, 750 watts, 6.5 amps
- Available in chrome
- Unit not for commercial/industrial use

Specifications

Capacity	2/3-gallon hot water tank dispenses 60 cups of 200°F water per hour
Electrical	115 volts A.C., 750 watts, 6.5 amp heating element with grounded three (3) prong plug
Thermostat	Snap-action, adjustable from 160°F to 210°F (factory pre-set at 200°F)
Insulation	Meets U.L. 94HF-1 flammability specification
Valve	Instant, self-closing
Recommended Supply Pressure	30-80 psi
Shipping Weight	Approximately 7.4 lbs.
Required Hole Diameter	1-3/8" standard sink hole

Water Filtration System Available

Sample Specification

Instant hot water dispenser(s) shall be InSinkErator Model H-Classic-SS with 2/3-gallon hot water tank, adjustable temperature from 160°F to 210°F and instant, self-closing hot valve.

Warranty:
3-year parts and in-home service.

* The complete InSinkErator warranty is included in the Care & Use booklet packed with each unit.

US Patent Pending (tank enclosure)



USA
1-800-558-5700
www.insinkerator.com

Canada
1-800-558-5700
www.insinkerator.ca

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.