


The slim and refined lines of Sahale bring a refreshing change to today's kitchens. Bright ENERGY STAR® certified LED lighting complements your cooking experience and three fan speeds make cooking more enjoyable. The LED modules included with this hood are the latest in LED cooktop illumination technology specially designed to operate in the elevated temperatures of cooking - offering bright lighting and lasting up to 25 times as long as a standard bulb and greater reliability than typical replacement LED bulbs.


| SIZE   | BLACK      | STAINLESS  | WHITE      | GREASE FILTERS<br>(replacement) | NON-DUCTED<br>FILTERS |
|--------|------------|------------|------------|---------------------------------|-----------------------|
| 30 in. | BKDEG130BL | BKDEG130SS | BKDEG130WW | HPFA3A30 (Type "C3")            | HPF30 (Type "Xc")     |

| FEATURES                                                                                 |                                     |
|------------------------------------------------------------------------------------------|-------------------------------------|
| Max. Blower CFM †                                                                        | 375                                 |
| Control type                                                                             | 3-speed Capacitive Touch            |
| Delay off                                                                                | no                                  |
| Filter Clean Reminder                                                                    | yes                                 |
| Heat Sentry™                                                                             | no                                  |
| ADA Capable                                                                              | yes                                 |
| Lighting                                                                                 | 2-level ENERGY STAR® LED (included) |
| Grease Filters                                                                           | Deluxe Micro Mesh (Qty. 2)          |
| Installation Hardware                                                                    | EZ1 brackets                        |
| ENERGY STAR®                                                                             | yes (no if installed non-ducted)    |
| Recirculation                                                                            | Non-ducted filters sold separately  |
| AC INPUT                                                                                 |                                     |
| 120 V, 60 Hz - 0.65 AMPS                                                                 |                                     |
| OPTIONAL ACCESSORIES                                                                     |                                     |
| 7-in. Round Damper                                                                       | BP87Q                               |
| ADA Wiring Kit                                                                           | HAWRK3                              |
| Make-up Air Dampers                                                                      | MD6TU, MD8TU and MD10TU             |
| MOUNTING HEIGHT                                                                          |                                     |
| 18 in. to 24 in. from cooktop to bottom of hood                                          |                                     |
| LIMITED WARRANTY                                                                         |                                     |
| 1-year<br>3-year (LED modules only)<br>(See installation manual for full warranty text.) |                                     |
| FOR INDOOR USE ONLY                                                                      |                                     |

† Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified.

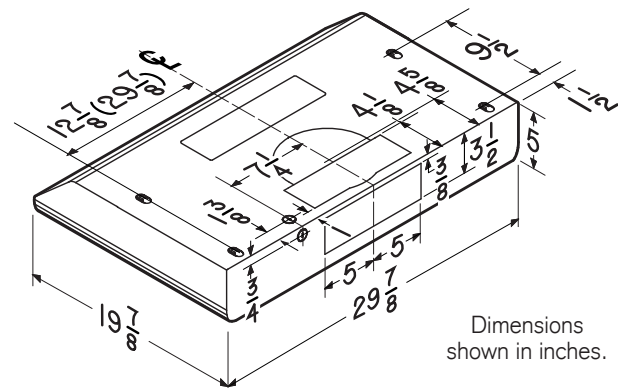

| HVI PERFORMANCE          |                 |                 |        |         |      |        |         |                    |                   |
|--------------------------|-----------------|-----------------|--------|---------|------|--------|---------|--------------------|-------------------|
| Duct Orientation         | Size            | Damper          | Sones  |         |      | CFM    |         |                    |                   |
|                          |                 |                 | Normal | Medium* | High | Normal | Medium* | High 0.25 in. w.g. | High 0.1 in. w.g. |
| Vertical - Rectangular   | 3¼ in. x 10 in. | Included        | 1.5    | 3.0     | 6.0  | 120    | 160     | 140                | 230               |
| Horizontal - Rectangular | 3¼ in. x 10 in. | Included        | 1.5    | 3.0     | 6.5  | 110    | 160     | 150                | 230               |
| Round - Vertical         | 7 in.           | Sold Separately | 1.5    | 3.0     | 5.5  | 130    | 180     | 115                | 260               |

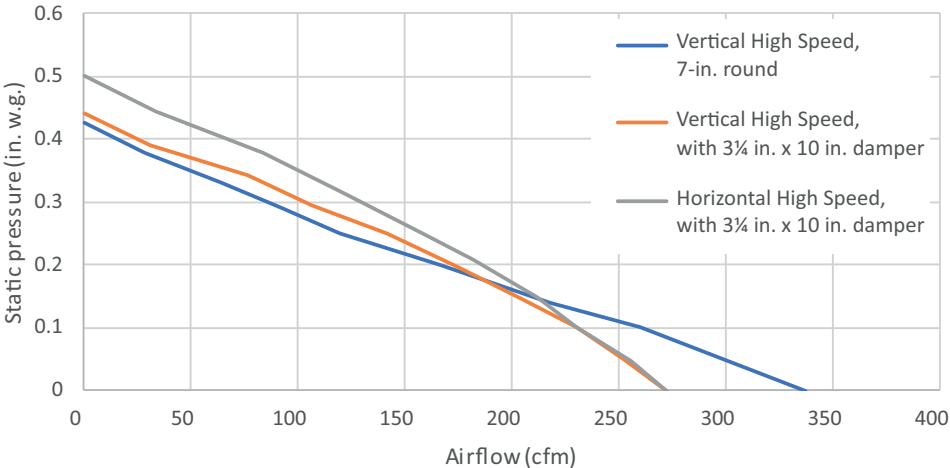

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

\* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.