


1.2 Cu. Ft. Low-Profile Over-the-Range Microwave

Over-The-Range Microwave

Version: 10/25



## **Product Specifications Cooking Controls Microwave Cooking** Clock Yes Beverage Yes 950 Watts Melt / Soften Cooking Power Yes Defrost Weight Yes Popcorn Yes Number of Power Levels 10 Potato Yes Reheat Yes **Ventilation System** Sensor Cooking Yes Veggies Yes Exhaust Fan Speeds Maximum Air Flow Capacity 400 CFM Minimum Air Flow Capacity 105 CFM **Microwave Control Features** + 10 Seconds Grease Filter Included Yes Yes Grease Filter Quantity + 30 Seconds Yes Grease Filter Dishwasher Safe Yes Quick Start Yes - One Touch Removable Grease Filter Yes Charcoal Filter Included Yes **Display Ducted Vent** Yes Control Location Bottom **Ductless Vent** Yes Display Interface Color White Display Type Capacitive Touch **Additional Settings** Child Lock Yes **Internal Specifications** Clock Display On / Off Yes Interior Color White Clock Settings Yes Interior Light Quantity 1 Demo On / Off Yes Interior Light Type LED Setting Turntable On / Off Yes Interior Light Wattage 1.2 Watts Setting Weight Lb / Kg Yes Turntable Diameter 12 2/5" Surface Cooking Light Yes Turntable Material Glass Vent Fan Yes **Dimensions and Volume** Exterior Height 10 5/16" Door Swing Side-Swing Door Width 29 7/8" Zero Clearance Door Opening Yes 18 5/8" Depth With Door 90° Open 47" **Surface Light System** Microwave Interior Height 7 3/8" Lighting Type LED Microwave Interior Width 21 7/8" Microwave Interior Depth Number of Lights 2 12 3/16" Number of Light Settings 3 Microwave Capacity 1.2 Cu. Ft. **Electrical Specifications General Specifications** Amps @ 120 Volts Prop 65 Label Yes 13.5 Amps

Warranty - Labor

Warranty - Parts

1 Year

1 Year

1.55 kW

120 V

Connected Load @ 120V

Voltage Rating

1.2 Cu. Ft. Low-Profile Over-the-Range Microwave

5560


Version: 10/25

## **Right to Repair Details**

Right to Repair

Partially Available - Visit frigidaire.ca/right-torepair for more information Version: 10/25

## **Installation Diagram**

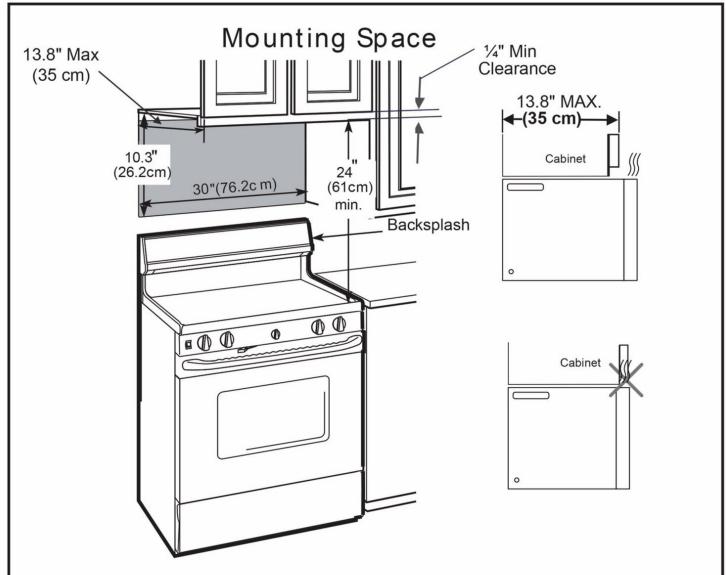

- The space between the cabinets must be 30" (76.2 cm) wide and free of obstructions.
- If you are going to vent your microwave oven to the outside, see Hood Exhaust Section for exhaust duct preparation
- When installing the microwave oven beneath smooth, flat cabinets, be careful to follow the instructions on the top cabinet template for power cord clearance.
- As a guide to installation, see page 26 for Mounting Template Information.
- If the cabinet depth, including the cabinet doors, is more than 13.8", then the unit must be spaced out from wall using adequate materials supporting 150 lbs to allow proper top vent air exhaust/intake.