


1.9 Cu. Ft. Over-The-Range Microwave

Over-The-Range Microwave

Version: 10/25



Product Specifications


Cooking Controls		Microwave Cooking	
Clock	Yes	Auto Cook	Yes
Cooking Power	1000 Watts	Melt / Soften	Yes
Defrost Time	Yes	Popcorn	Yes
Defrost Weight	Yes	Potato	Yes
Number of Power Levels	10	Reheat	Yes
		Sensor Cooking	Yes
Ventilation System		Veggies	Yes
Exhaust Fan Speeds	3		
Maximum Air Flow Capacity	400 CFM	Microwave Control Features	
Minimum Air Flow Capacity	105 CFM	+ 10 Seconds	Yes
Grease Filter Included	Yes	+ 30 Seconds	Yes
Grease Filter Quantity	2	Quick Start	Yes
Grease Filter Dishwasher Safe	Yes	Quick Start	103
Removable Grease Filter	Yes	Display	
Charcoal Filter Included	Yes	Control Location	Dight
Ducted Vent	Yes	Display Interface Color	Right White
Ductless Vent	Yes	Display Type Display Type	Capacitive Touch
Ductiess vent	103	Display Type	Capacitive foucii
Additional Settings		Internal Specifications	
Child Lock	Yes	Internal Specifications Interior Color	7.71 ·.
Clock Display On / Off	Yes		White
Clock Settings	Yes	Interior Light Quantity	1 LED C: :
Demo On / Off	Yes	Interior Light Type	LED Strip
Setting Turntable On / Off	Yes	Interior Light Wattage	1.2 Watts
Setting Weight Lb / Kg	Yes	Turntable Diameter	13 5/8"
Surface Cooking Light	Yes	Turntable Material	Glass
Timer On / Off	Yes		
Vent Fan	Yes	— Dimensions and Volume	
vent ran	ies	— Height	16 3/8"
		Width	29 7/8"
Exterior		Depth	15 3/4"
Door Swing	Side-Swing Door	Depth With Door 90° Open	44 3/8"
Zero Clearance Door Opening	Yes	Microwave Interior Height	9 1/8"
		Microwave Interior Width	19 13/16"
Surface Light System		Microwave Interior Depth	13 3/4"
Lighting Type	LED Strip	Microwave Capacity	1.9 Cu. Ft.
Number of Lights	2		
Number of Light Settings	2	General Specifications	
		Prop 65 Label	Yes
Electrical Specifications		Warranty - Labor	1 Year
Amps @ 120 Volts	13.5 Amps	Warranty - Parts	1 Year
Connected Load @ 120V	1.55 kW		
Voltage Rating	120 V		

1.9 Cu. Ft. Over-The-Range Microwave	5560
Version: 10/25	

Safety Certifications and Approvals		Right to Repair Details		
cUL Listed	Yes	Right to Repair	Partially Available - Visit	
UL Listed	Yes		frigidaire.ca/right-to-	
			repair for more	
			information	

Version: 10/25

Installation Diagram

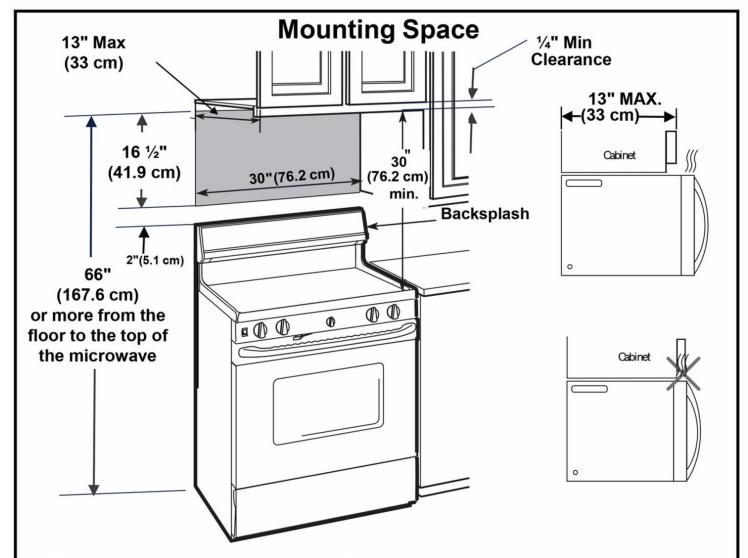

- The space between the cabinets must be 30" (76.2 cm) wide and free of obstructions.
- If you are going to vent your microwave oven to the outside, see Hood Exhaust Section for exhaust duct preparation
- When installing the microwave oven beneath smooth, flat cabinets, be careful to follow the instructions on the top cabinet template for power cord clearance.
- As a guide to installation, see page 26 for Mounting Template Information.
- If the cabinet depth, including the cabinet doors, is more than 13", then the unit must be spaced out from wall using adequate materials supporting 150 lbs to allow proper top vent air exhaust/intake.