

WINE CABINET & BEVERAGE CENTER

PLANNING GUIDE

INTEGRATED WINE CABINET - RS2435V2RT1, RS2435V2R1

INTEGRATED BEVERAGE CENTRE - RS2435SBLT1, RS2435SBL1

FISHER & PAYKEL

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Design Choices		Data Sheets		Services	
Wine Cabinet & Beverage Center	4	Wine Cabinet & Beverage Center + 30 3/8" Stainless Steel Door Panel	12	Power and Water Connections	25
Specification Guide		Wine Cabinet & Beverage Center + 29 7/8" Stainless Steel Door Panel	13	Handle Data Sheets	
Integrated Wine Cabinet	6	Wine Cabinet & Beverage Center + Custom Door Panel	14	Professional Handle	27
Integrated Beverage Center	8			Fine Aluminium Handle	28
Multiple Installation	10	Planning Considerations		Fine Round Handle	29
		Door Panel Accessories	16	Classic Handle	30
		Undercounter + Tall Dishwasher Alignment	17		
		Custom Toe Kick Details	18		
		Custom Panel Preparation – Solid Door	19		
		Custom Panel Preparation – Glass Door	20		
		Hinge Articulation	21		
		Door Opening Clearance	22		


SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.

designsupport@fisherpaykel.com

DESIGN CHOICES

DESIGN CHOICES | WINE CABINET & BEVERAGE CENTER

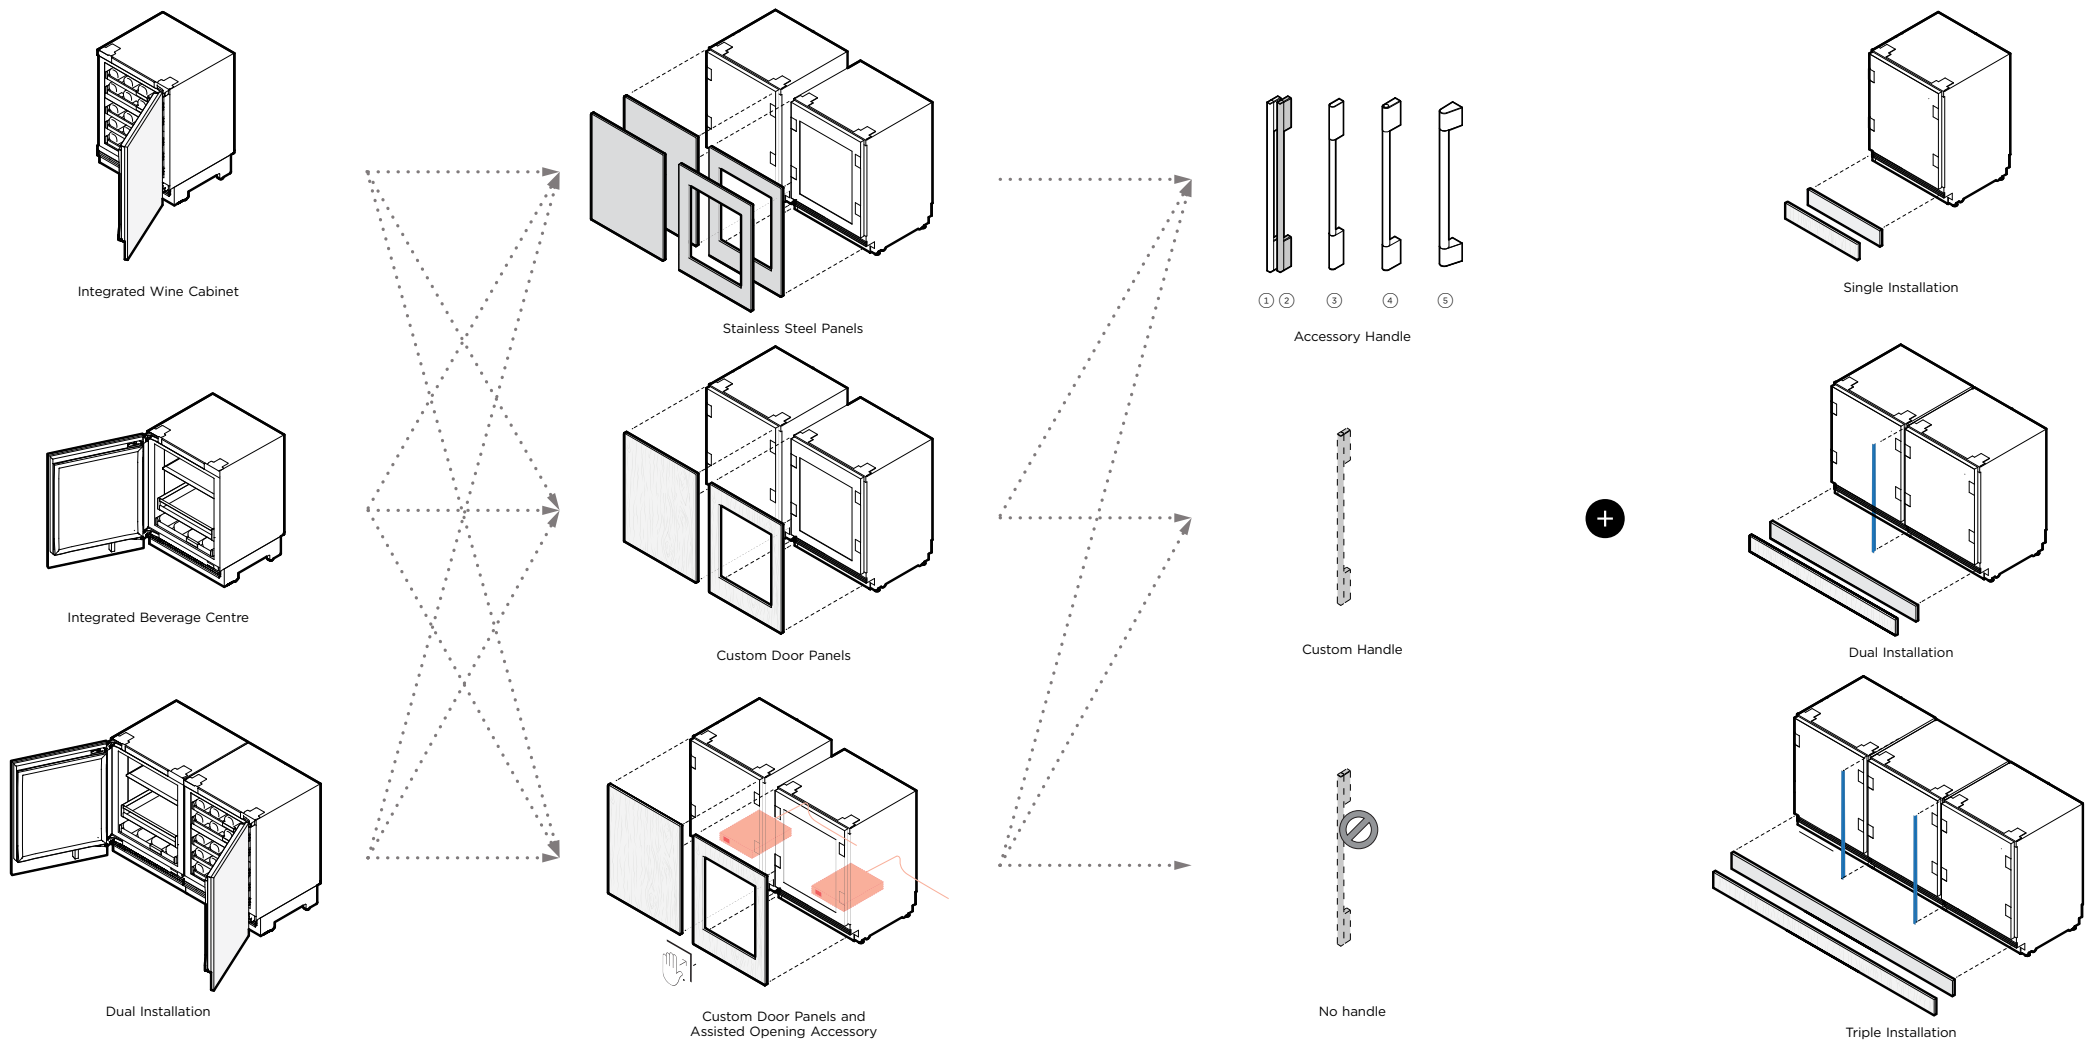

MODELS		
	Left Hinge	Right Hinge
Integrated Wine Cabinet - Glass door		RS2435V2RT1
Integrated Wine Cabinet - Solid door		RS2435V2R1
Integrated Beverage Center - Glass door	RS2435SBLT1	
Integrated Beverage Center - Solid door	RS2435SBL1	

Note: All models can achieve opposite hinge location using the supplied parts

DOOR PANELS		
	Left Hinge	Right Hinge
30 3/8" Solid Stainless Steel Door Panel	RD2435L	RD2435R
30 3/8" Glass Stainless Steel Door Panel	RD2435VL	RD2435VR
29 7/8" Solid Stainless Steel Door Panel	RD2434L	RD2434R
29 7/8" Glass Stainless Steel Door Panel	RD2434VL	RD2434VR
Assisted Opening Accessory	OPIN1	

Note: The 29 7/8" stainless steel door panel is to aligned with integrated tall dishwashers.
Note: Custom Door Panels to be manufactured and fitted by cabinet maker

HANDLES		
① Fine Aluminium Handle		AHD5RD35
② Fine Black Aluminium Handle		AHD5RD35B
③ Fine Round Handle		AHSRD35
④ Classic Handle		AHCLRD35
⑤ Professional Handle		AHP3RD35

Note: Custom handles to be fitted by cabinet maker

STAINLESS STEEL TOE KICK AND JOINER KIT		
	Toe Kick	Joiner Kit
Single Installation	AKRS2304	Not required
Dual Installation	AKRS4704	AJRS35LR (1x)
Triple Installation	AKRS7104	AJRS35LR (2x)

Note: Custom Toe Kick to be manufactured and fitted by cabinet maker

SPECIFICATION GUIDE



RS2435V2R1 – Solid door with Custom Panel



RS2435V2RT1 – Glass door with Custom Panel

OVERVIEW

Designed for wine lovers, this under-counter wine cabinet seamlessly fits in any space of the evolving home. Boasting premium oak slide-out shelves and a UV-tempered glass door, it elegantly showcases up to 35 bottles. Featuring dual temperature zones and specialised modes for Red, White, Sparkling, and Cellar wines, this versatile cabinet provides the perfect environment for all wine varieties.

FEATURES

- ① Integrates into any setting within the home, from the bar to the master suite – the choices are endless
- ② Four specialised wine modes for Red, White, Sparkling, and Cellar wines
- ③ Designed to fit flush, with 3/16" gaps and no visible hinges or grilles
- ④ Premium oak slide-out shelves for convenient access and storage
- ⑤ Accommodates up to 35 bottles, providing ample space for a diverse collection
- ⑥ Features two independent temperature zones to cater for different wine varieties
- ⑦ UV-tempered glass door elegantly displays and protects wine
- ⑧ Intuitive interface for easy temperature control and mode selection
- ⑨ Internal LED lighting provides beautiful illumination, showcasing the collection
- ⑩ Wi-Fi enabled for remote temperature control from the SmartHQ™ app

PRODUCTS

RS2435V2RT1 Integrated Wine Cabinet

Glass Door, Panel Ready or Stainless Steel Panel, Right Hinge
(All models can achieve opposite hinge location using the supplied parts)

RS2435V2R1 Integrated Wine Cabinet

Solid Door, Panel Ready or Stainless Steel Panel, Right Hinge
(All models can achieve opposite hinge location using the supplied parts)




RS2435SBL1 & RS2435V2R1 Side by Side

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SPECIFICATIONS

Model No.	RS2435V2RT1, RS2435V2R1
Product Dimensions	H 34 - 35 7/16" W 23 5/16" D 22 13/16
Electrical	
Supply	115 V, 60 Hz
Service	10 A
Connection	Plug with flex cord
Weights	
Packaged	Wine Cabinet, Glass Door - 174lb (79kg) Wine Cabinet, Solid Door - 170lb (77kg)
Unpackaged	Wine Cabinet, Glass Door - 141lb (64kg) Wine Cabinet, Solid Door - 137lb (62kg)


PRODUCT DIMENSIONS

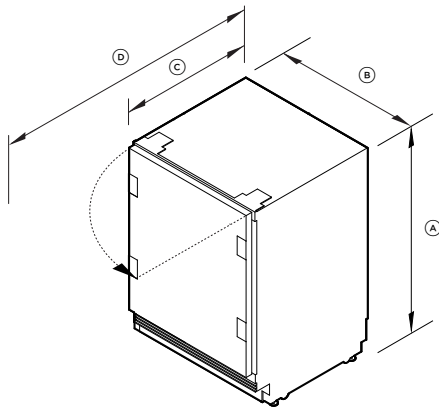

	inch	mm
Ⓐ Overall height	34 - 35 7/16	864 - 900
Ⓑ Overall width	23 5/16	592
Ⓒ Overall depth*	22 13/16	579
Ⓓ Overall depth with the door open*	47 1/4	1200
Height from floor to bottom of custom door panel (visual toe kick)**	9/16 - 5 3/8	15 - 136
Depth of toe kick (excl. front door and toe kick panels)**	2 - 3 15/16	50 - 100
Splitline heights achievable (height from floor to top of custom door panel)	min 33 7/8	min 861

*Excluding door panel and handle.
**Applies to custom door panels.
Note: Maximum custom door panel thickness of 3/4" (19mm).

CAVITY DIMENSIONS: STANDARD INSTALLATION

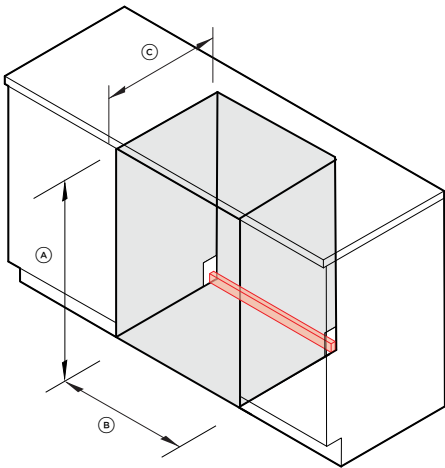

	inch	mm
Ⓐ Height	34 - 35 7/16	864 - 900
Ⓑ Width	23 5/8	600
Ⓒ Minimum overall cavity depth with service to the side*	23 10/16	600
Minimum overall cavity depth with service behind*	25 9/16	650
Service area		
H 1 7/16" x W 23 5/8" x D 13/16 (H 37mm x W 600mm x D 20mm)		

*Including max custom door panel thickness 3/4" (19mm).

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com



RS2435SBL1 – Solid door with Custom Panel



RS2435SBLT1 – Glass door with Custom Panel



RS2435SBL1 & RS2435V2R1 Side by Side

OVERVIEW

Experience the luxury of the Integrated Beverage Center. Seamlessly blending into any home setting, its adjustable shelves and full-depth wine shelf elegantly house your favourite beverages. With a UV-resistant glass door and soft LED lighting, this Beverage Center is a blend of style and functionality, offering optimal conditions for all drinks.

PRODUCTS

RS2435SBLT1 Integrated Beverage Center
Glass Door, Panel Ready or Stainless Steel Panel, Left Hinge
(All models can achieve opposite hinge location using the supplied parts)

RS2435SBL1 Integrated Beverage Center
Solid Door, Panel Ready or Stainless Steel Panel, Left Hinge
(All models can achieve opposite hinge location using the supplied parts)

FEATURES


- ① Integrates into any setting within the home, from the bar to the master suite – the choices are endless
- ② Designed to fit flush, with 3/16" gaps and no visible hinges or grilles
- ③ Adjustable temperature control helps to keep drinks at the ideal temperature
- ④ Customisable beverage shelf with adjustable gates ensures contents remain upright and neatly organised
- ⑤ Spacious 4.6 cu ft capacity, with full-depth wine shelf that can accommodate up to seven bottles
- ⑥ Wi-Fi enabled for remote temperature control from the SmartHQ™ app
- ⑦ Internal LED lighting provides beautiful illumination, showcasing the collection
- ⑧ UV-tempered glass door elegantly displays and protects beverages
- ⑨ Intuitive interface for easy temperature control and mode selection

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SPECIFICATIONS

Model No.	RS2435SBLT1, RS2435SBL1
Product Dimensions	H 34 - 35 7/16" W 23 5/16" D 22 13/16
Electrical	
Supply	115 V, 60 Hz
Service	10 A
Connection	Plug with flex cord
Weights	
Packaged	Beverage Center, Glass Door - 159lb (72kg) Beverage Center, Solid Door - 154lb (70kg)
Unpackaged	Beverage Center, Glass Door - 132lb (60kg) Beverage Center, Solid Door - 128lb (58kg)


PRODUCT DIMENSIONS

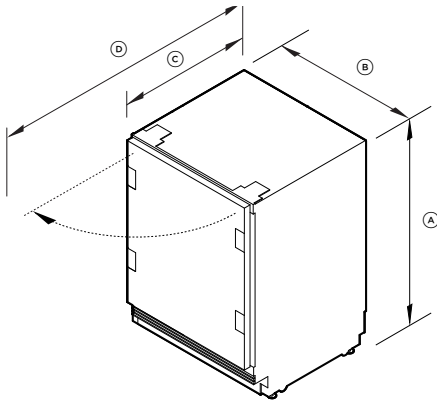

	inch	mm
Ⓐ Overall height	34 - 35 7/16	864 - 900
Ⓑ Overall width	23 5/16	592
Ⓒ Overall depth*	22 13/16	579
Ⓓ Overall depth with the door open*	47 1/4	1200
Height from floor to bottom of custom door panel (visual toe kick)**	9/16 - 5 3/8	15 - 136
Depth of toe kick (excl. front door and toe kick panels)**	2 - 3 15/16	50 - 100
Splitline heights achievable (height from floor to top of custom door panel)	min 33 7/8	min 861

*Excluding door panel and handle.
**Applies to custom door panels.
Note: Maximum custom door panel thickness of 3/4" (19mm).

CAVITY DIMENSIONS: STANDARD INSTALLATION

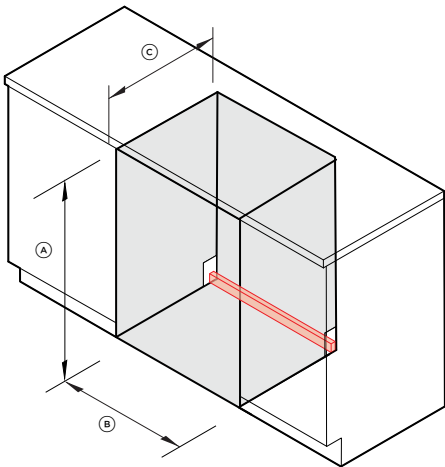

	inch	mm
Ⓐ Height	34 - 35 7/16	864 - 900
Ⓑ Width	23 5/8	600
Ⓒ Minimum overall cavity depth with service to the side*	23 10/16	600
Minimum overall cavity depth with service behind*	25 9/16	650
Service area		
H 1 7/16" x W 23 5/8" x D 13/16 (H 37mm x W 600mm x D 20mm)		


*Including max custom door panel thickness 3/4" (19mm).

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SPECIFICATIONS

Model No.	RS2435V2RT1, RS2435V2R1, RS2435SBLT1, RS2435SBL1
Product Dimensions	H 34 - 35 7/16" W 23 5/16" D 22 13/16
Electrical	
Supply	115 V, 60 Hz
Service	10 A
Connection	Plug with flex cord


PRODUCT DIMENSIONS

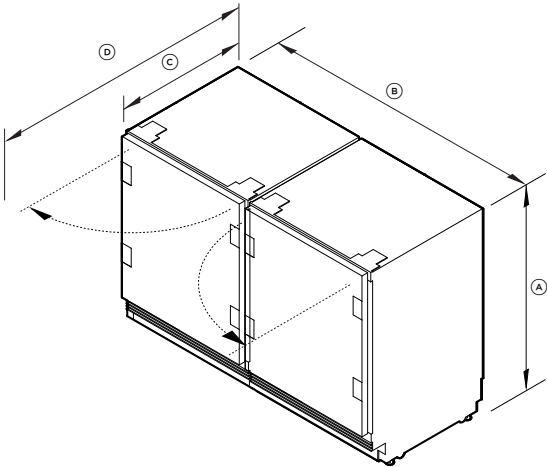

	inch	mm
Ⓐ Overall height	34 - 35 7/16	864 - 900
Ⓑ Overall width dual installation*	46 7/8	1190
Overall width triple installation*	69 15/16	1776
Ⓒ Overall depth**	22 13/16	579
Ⓓ Overall depth with the door open**	47 1/4	1200
Height from floor to bottom of custom door panel (visual toe kick)***	9/16 - 5 3/8	15 - 136
Depth of toe kick (excl. front door and toe kick panels)***	2 - 3 15/16	50 - 100
Splitline heights achievable (height from floor to top of custom door panel)	min 33 7/8	min 861

*Including joiner kit.
**Excluding door panel and handle.
***Applies to custom door panels.
Note: Maximum custom door panel thickness of 3/4" (19mm).

CAVITY DIMENSIONS: STANDARD INSTALLATION

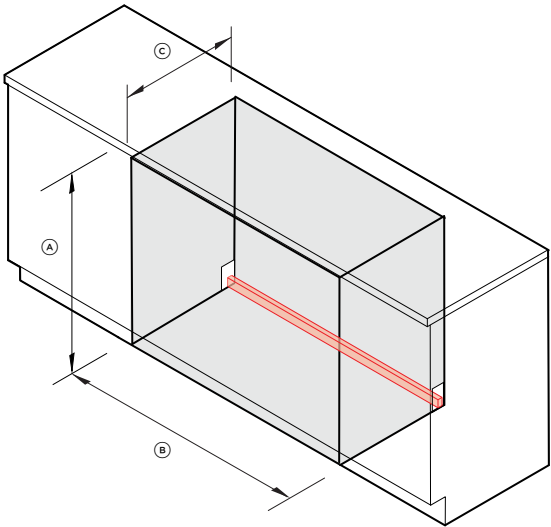


	inch	mm
Ⓐ Height	34 - 35 7/16	864 - 900
Ⓑ Width dual installation	47 1/4	1200
Width triple installation	70 7/8	1800
Ⓒ Minimum overall cavity depth with service to the side*	23 10/16	600
Minimum overall cavity depth with service behind*	25 9/16	650
Service area dual installation H 1 7/16" x W 47 1/4" x D 13/16 (H 37mm x W 1200mm x D 20mm)		
Service area triple installation H 1 7/16" x W 70 7/8" x D 13/16" (H 37mm x W 1800mm x D 20mm)		

*Including max custom door panel thickness 3/4" (19mm).

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

DATA SHEETS

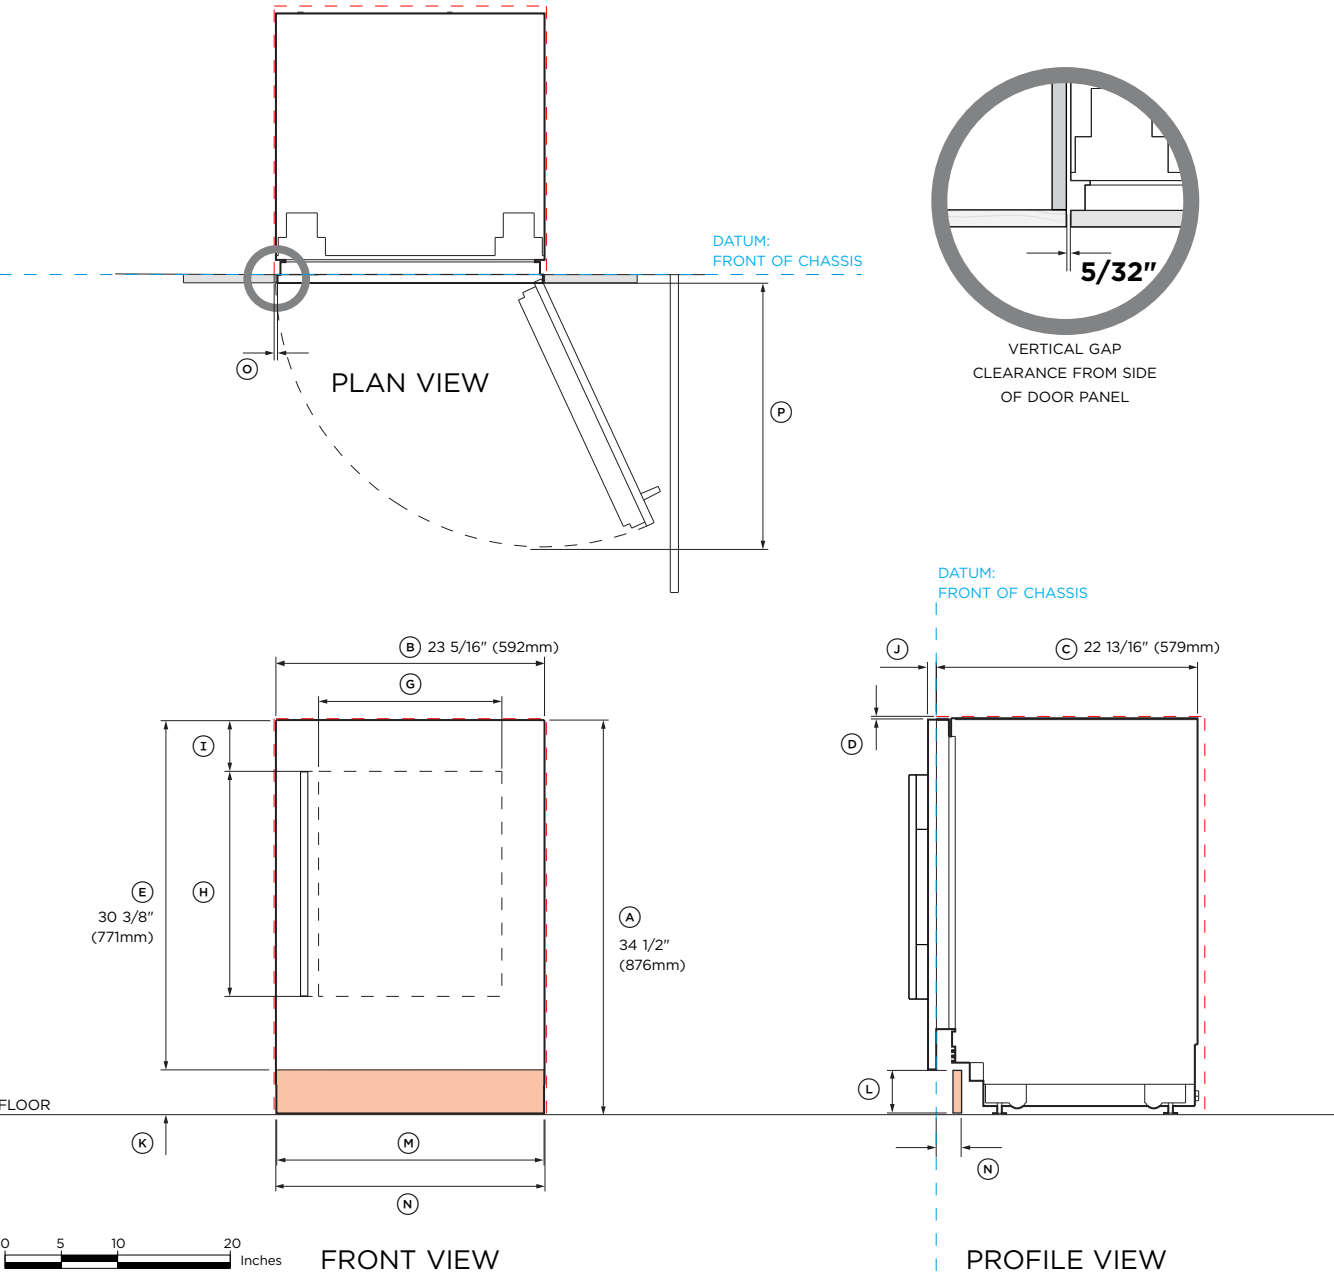

Integrated Wine Cabinets & Beverage Centers with Stainless Steel Door Panels

Model No:

Wine Cabinet, Glass Door - **RS2435V2RT1** (right hinge)

Wine Cabinet, Solid Door - **RS2435V2R1** (right hinge)

Beverage Center, Glass Door - **RS2435BLT1** (left hinge)

Beverage Center, Solid Door - **RS2435BL1** (left hinge)

Note: Right hinge is shown in drawing. All models can achieve opposite hinge location using the supplied parts.

30 3/8" Stainless Steel Door Panel:

Glass Door Panel - **RD2435VR** (right hinge) or **RD2435VL** (left hinge)

Solid Door Panel - **RD2435R** (right hinge) or **RD2435L** (left hinge)

Shown With:

Handle Kit - **AHD5RD35(B)**

Stainless Steel Toe Kick Panel - **AKRS2304**

Product Dimensions		Inch	mm
A	Overall height of product*	34 1/2	876
B	Overall width of product	23 5/16	592
C	Overall depth of product (excl. front door panels)	22 13/16	579
D	Height from top of door panel to chassis	1/8	3
E	Height of stainless steel door panel	30 3/8	771
F	Width of stainless steel door panel	23 5/16	592
G	Width glass window	15 15/16	404
H	Height glass window	19 9/16	496
I	Top of door panel to top of cut-out/window	4 7/16	113
J	Thickness of stainless steel door panel	11/16	18
K	Visual toe kick height*	4	102
L	Height of stainless steel toe kick panel	3 15/16	100
M	Width of stainless steel toe kick panel	23 1/2	596
N	Depth of toe kick (excl. front door and toe kick panels)	2-3 15/16	50-100
O	Minimum cabinetry clearance from side of door panel	5/32	4
P	Depth of door (90° open, measured from front of cabinetry)	23 10/16	600

*Overall height to achieve a 4" (102mm) visual toe kick.

Note: Head to 'Toe Kick Details' section of this planning guide to find out more about visual toe kicks.


Cavity Dimensions		inch	mm
Overall height of cavity		34 1/2	876
Overall width of cavity		23 10/16	600
Minimum overall depth of cavity: (including front panel)			
When services are located outside of cavity (shallow)*		23 10/16	600
When services are located in the neighbouring cavities		24	610
When services are located at rear of cavity (deep)		25 10/16	650
*Multiple product installation cavity depth is 24" (610mm), this to allow space for the joiner kit bracket			
Minimum clearance from top of door panel to the underside of the benchtop		1/8	3

Notes: Product shown installed on the floor. Slide into cabinetry position. Alternatively can be installed on a plinth. Adjust your cavity height accordingly.

INDICATES PRODUCT DATUM

INDICATES CABINERY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

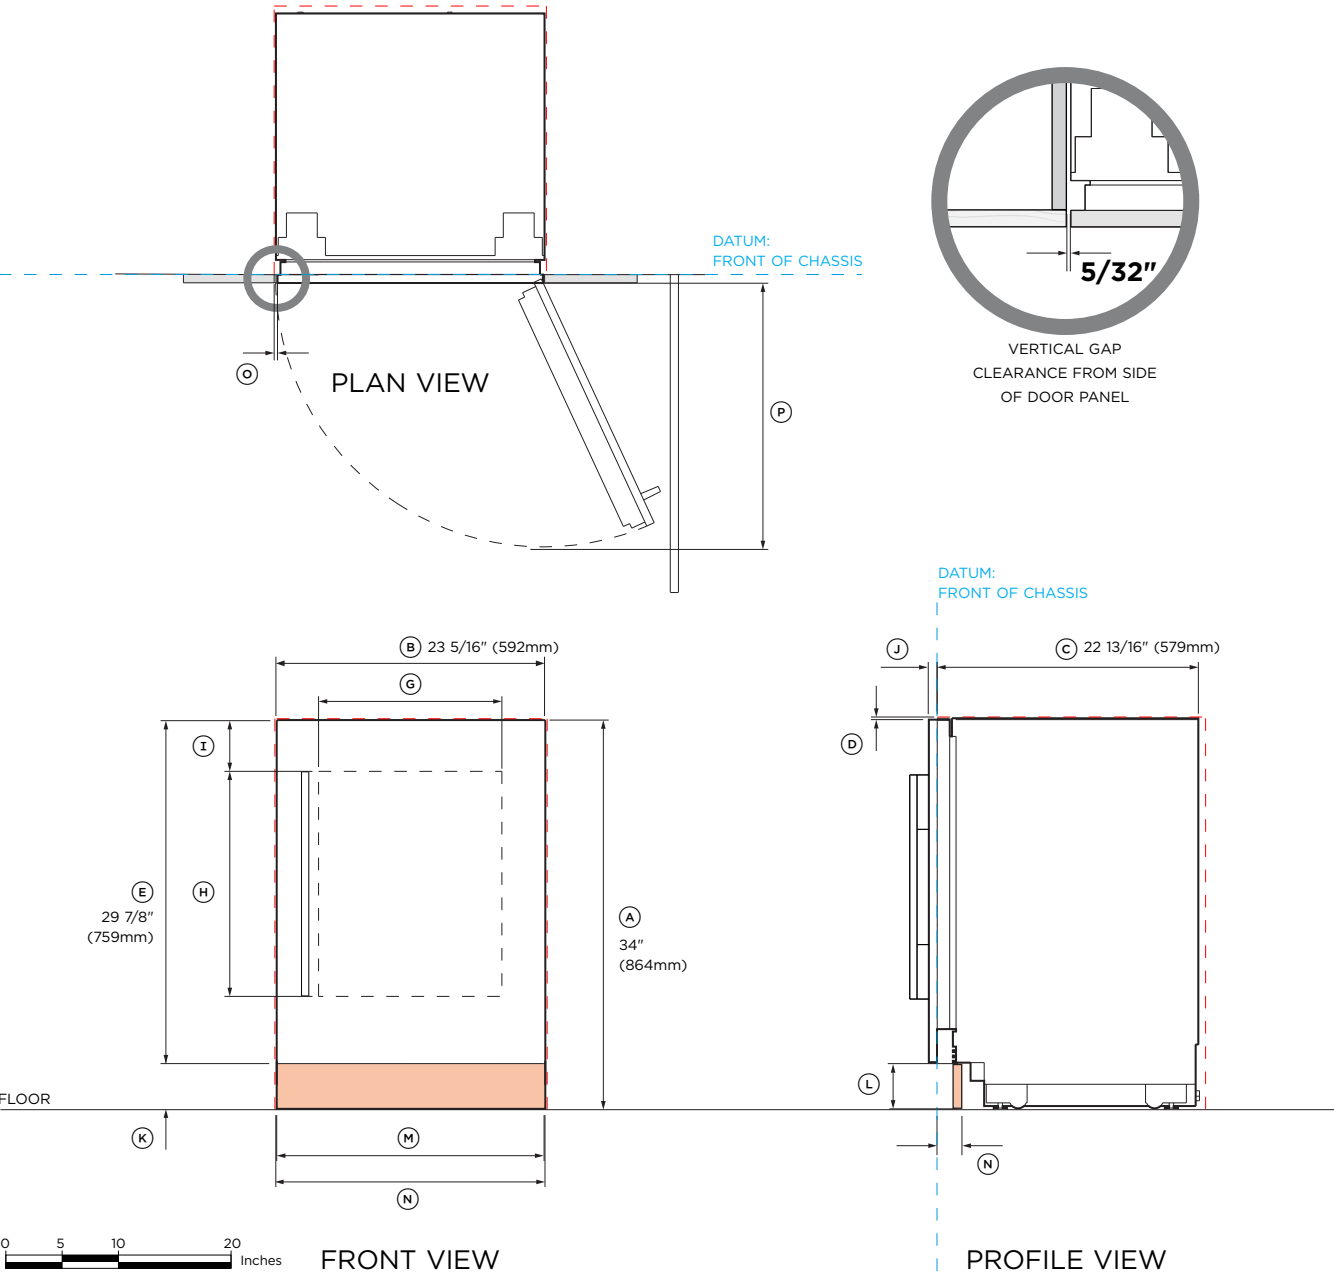

Integrated Wine Cabinets & Beverage Centers with Stainless Steel Door Panels

Model No:
Wine Cabinet, Glass Door - **RS2435V2RT1** (right hinge)
Wine Cabinet, Solid Door - **RS2435V2R1** (right hinge)
Beverage Center, Glass Door - **RS2435BLT1** (left hinge)
Beverage Center, Solid Door - **RS2435BL1** (left hinge)
Note: Right hinge is shown in drawing. All models can achieve opposite hinge location using the supplied parts.

29 7/8" Stainless Steel Door Panel:
Glass Door Panel - **RD2434VR** (right hinge) or **RD2434VL** (left hinge)
Solid Door Panel - **RD2434R** (right hinge) or **RD2434L** (left hinge)
Note:The 29 7/8" stainless steel door panel is to be aligned with Integrated Tall Dishwashers.

Shown With:
Handle Kit - **AHD5RD35(B)**
Stainless Steel Toe Kick Panel - **AKRS2304**

Product Dimensions	Inch	mm
A Overall height of product*	34	864
B Overall width of product	23 5/16	592
C Overall depth of product (excl. front door panels)	22 13/16	579
D Height from top of door panel to chassis	1/8	3
E Height of stainless steel door panel	29 7/8	759
F Width of stainless steel door panel	23 5/16	592
G Width glass window	15 15/16	404
H Height glass window	19 9/16	496
I Top of door panel to top of cut-out/window	4 7/16	113
J Thickness of stainless steel door panel	11/16	18
K Visual toe kick height*	4	102
L Height of stainless steel toe kick panel	3 15/16	100
M Width of stainless steel toe kick panel	23 1/2	596
N Depth of toe kick (excl. front door and toe kick panels)	2-3 15/16	50-100
O Minimum cabinetry clearance from side of door panel	5/32	4
P Depth of door (90° open, measured from front of cabinetry)	23 10/16	600


*Overall height to achieve a 4" (102mm) visual toe kick.
Note: Head to 'Toe Kick Details' section of this planning guide to find out more about visual toe kicks.

Cavity Dimensions	Inch	mm
Overall height of cavity	34	864
Overall width of cavity	23 10/16	600
Minimum overall depth of cavity: (including front panel)		
When services are located outside of cavity (shallow)*	23 10/16	600
When services are located in the neighbouring cavities	24	610
When services are located at rear of cavity (deep)	25 10/16	650
*Multiple product installation cavity depth is 24" (610mm), this to allow space for the joiner kit bracket		
Minimum clearance from top of door panel to the underside of the benchtop	1/8	3

Notes: Product shown installed on the floor. Slide into cabinetry position. Alternatively can be installed on a plinth. Adjust your cavity height accordingly.

INDICATES PRODUCT DATUM
INDICATES CABINETY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

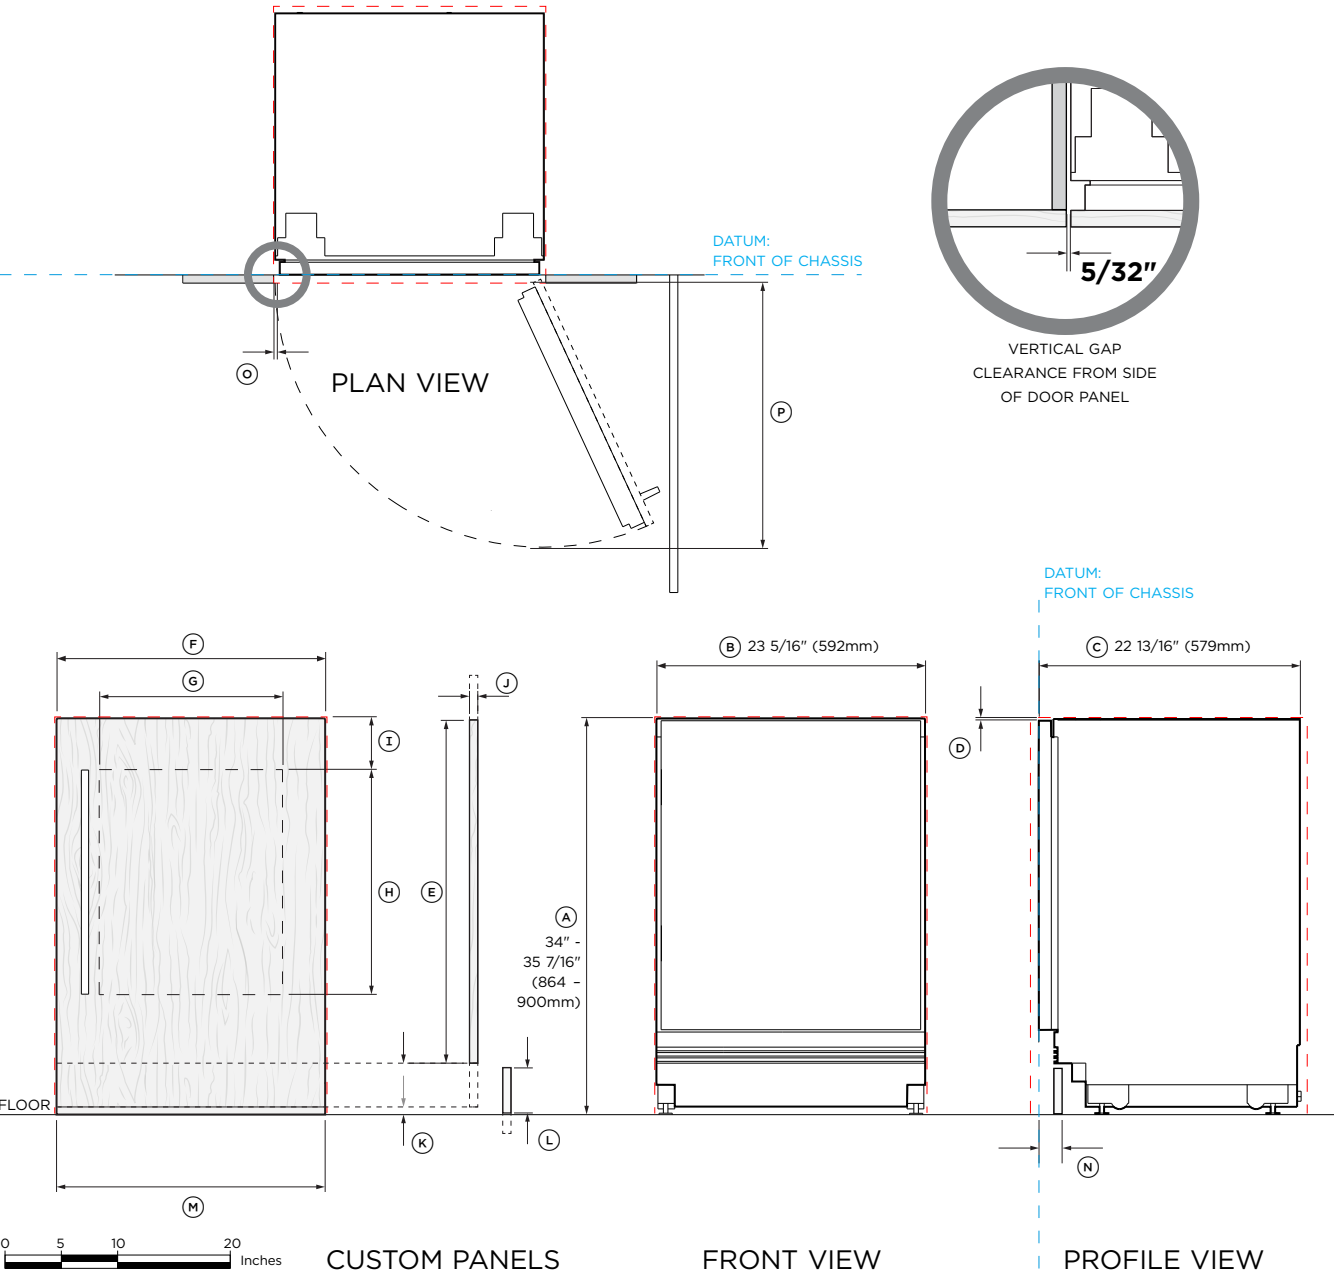

Integrated Wine Cabinets & Beverage Centers with Custom Door Panels

Model No:

Wine Cabinet, Glass Door - RS2435V2RT1 (right hinge)
Wine Cabinet, Solid Door - RS2435V2R1 (right hinge)
Beverage Center, Glass Door - RS2435BLT1 (left hinge)
Beverage Center, Solid Door - RS2435BL1 (left hinge)

Note: Right hinge is shown in drawing. All models can achieve opposite hinge location using the supplied parts.

Product Dimensions	Inch	mm
A Overall height of product	34-35 7/16	864 - 900
B Overall width of product	23 5/16	592
C Overall depth of product (excl. front door panels)	22 13/16	579
D Minimum height from top of custom door panel to chassis	1/8	3
E Minimum height of custom door panel	30	761
F Width of custom door panel		
- Single install	23 5/16	592
- Dual install	23 3/8	594
- Triple install	23 7/16	594.5
G Width of glass window	15 15/16	404
H Height of glass window	19 9/16	496
I Top edge of glass to top of chassis	4 9/16	116
J Thickness of custom door panel	5/8-3/4	16 - 19
K Visual toe kick height*	9/16 - 5 3/8	15 - 136
L Height of custom toe kick panel	min 3 15/16 max 5 1/8	min 100 max 131
M Width of custom toe kick panel	23 1/2	596
N Depth of toe kick (excl. front door and toe kick panels)	2 - 3 15/16	50 - 100
O Minimum cabinetry clearance from side of door panel	5/32	4
P Depth of door (90° open, measured from front of cabinetry)	23 10/16	600

*Head to 'Custom Toe Kick Details' section of this planning guide to find out more about visual toe kicks.

Note: The custom door panel can be extended upwards. Ensure that the minimum clearances are maintained and that the glass window dimensions are adjusted accordingly.


Cavity Dimensions	Inch	mm
Overall height of cavity	34-35 7/16	864 - 900
Overall width of cavity	23 10/16	600
Minimum overall depth of cavity: (incl. custom front panel)		
When services are located outside of cavity (shallow)*	23 10/16	600
When services are located in the cabinet above the cavity	24	610
When services are located at rear of cavity (deep)	25 10/16	650
*Multiple product installation cavity depth is 24" (610mm), this to allow space for the joiner kit bracket		
Minimum clearance from top of custom door panel to the underside of the benchtop	1/8	3

Notes: Product shown installed on the floor. Slide into cabinetry position. Alternatively can be installed on a plinth. Adjust your cavity height accordingly.

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

PLANNING CONSIDERATIONS

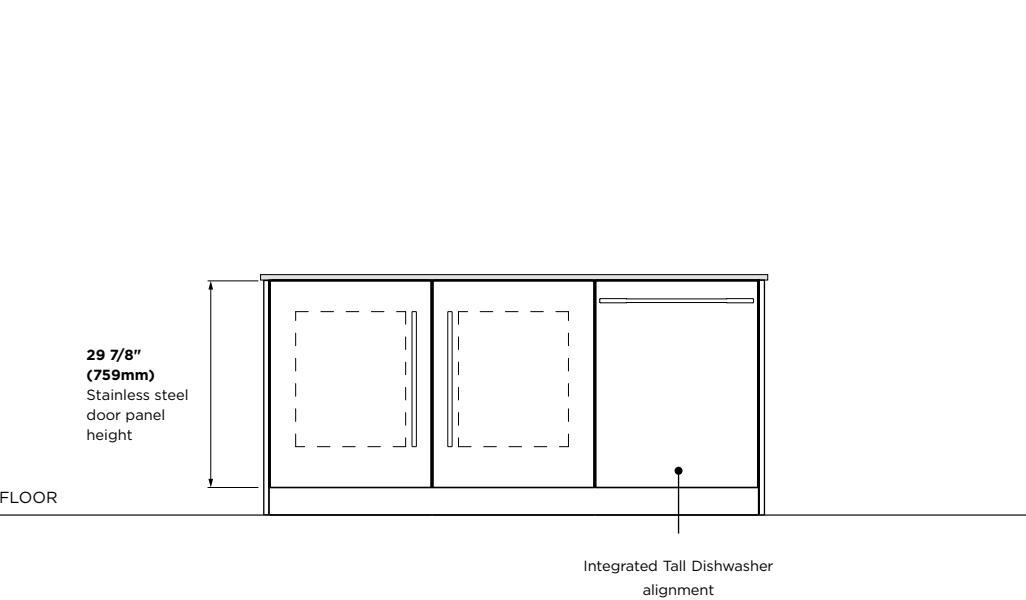

29 7/8" STAINLESS STEEL DOOR PANEL


Stainless Steel Panel - Solid door
Left hinge - RD2434L
Right hinge - RD2434R

Stainless Steel Panel - Glass door
Left hinge - RD2434VL
Right hinge - RD2434VR

INTEGRATED TALL DISHWASHERS

The 29 7/8" stainless steel door panel is to aligned with these Integrated Tall Dishwashers.

Series 9 Integrated Tall Dishwasher - DW24UT4I2
Series 7 Integrated Tall Dishwasher - DW24UT2I3
Stainless Steel Door Panel For Integrated Dishwasher, Tall - ADDW24TPX

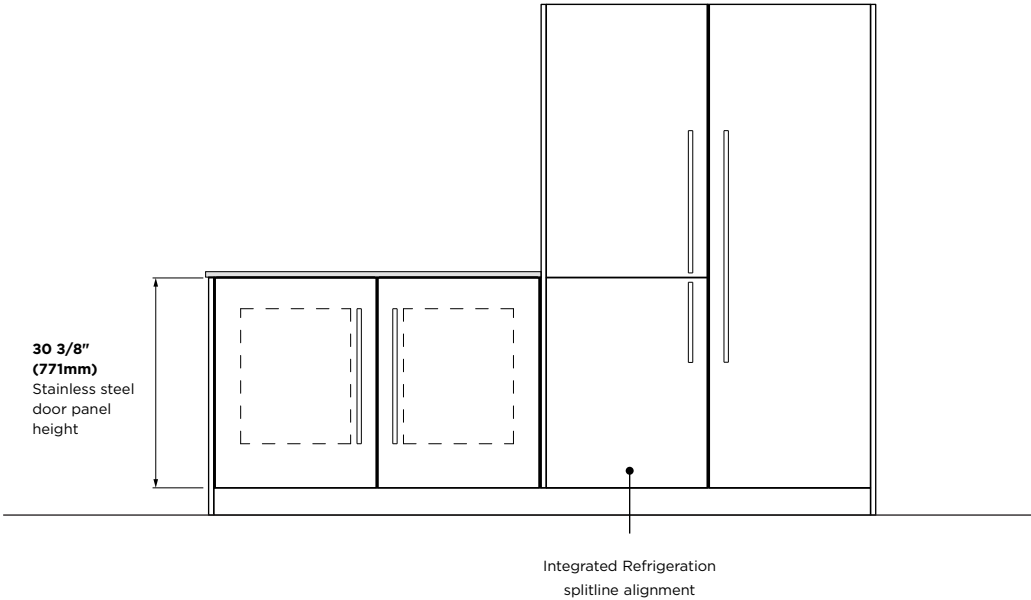

30 3/8" STAINLESS STEEL DOOR PANEL

Stainless Steel Panel - Solid door
Left hinge - RD2435L
Right hinge - RD2435R


Stainless Steel Panel - Glass door
Left hinge - RD2435VL
Right hinge - RD2435VR

INTEGRATED REFRIGERATION

The 30 3/8" stainless steel door panel is to aligned with these Integrated Refrigerator.

24" Series 9 Integrated Refrigerator Freezer - RS2474BRU1
24" Series 9 Integrated Triple Zone Refrigerator - RS2474S3RH1
24" Series 9 Integrated Triple Zone Freezer - RS2474F3LJ1
Stainless Steel Door Panels - RD2474BL, RD2474BR or RD2474

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

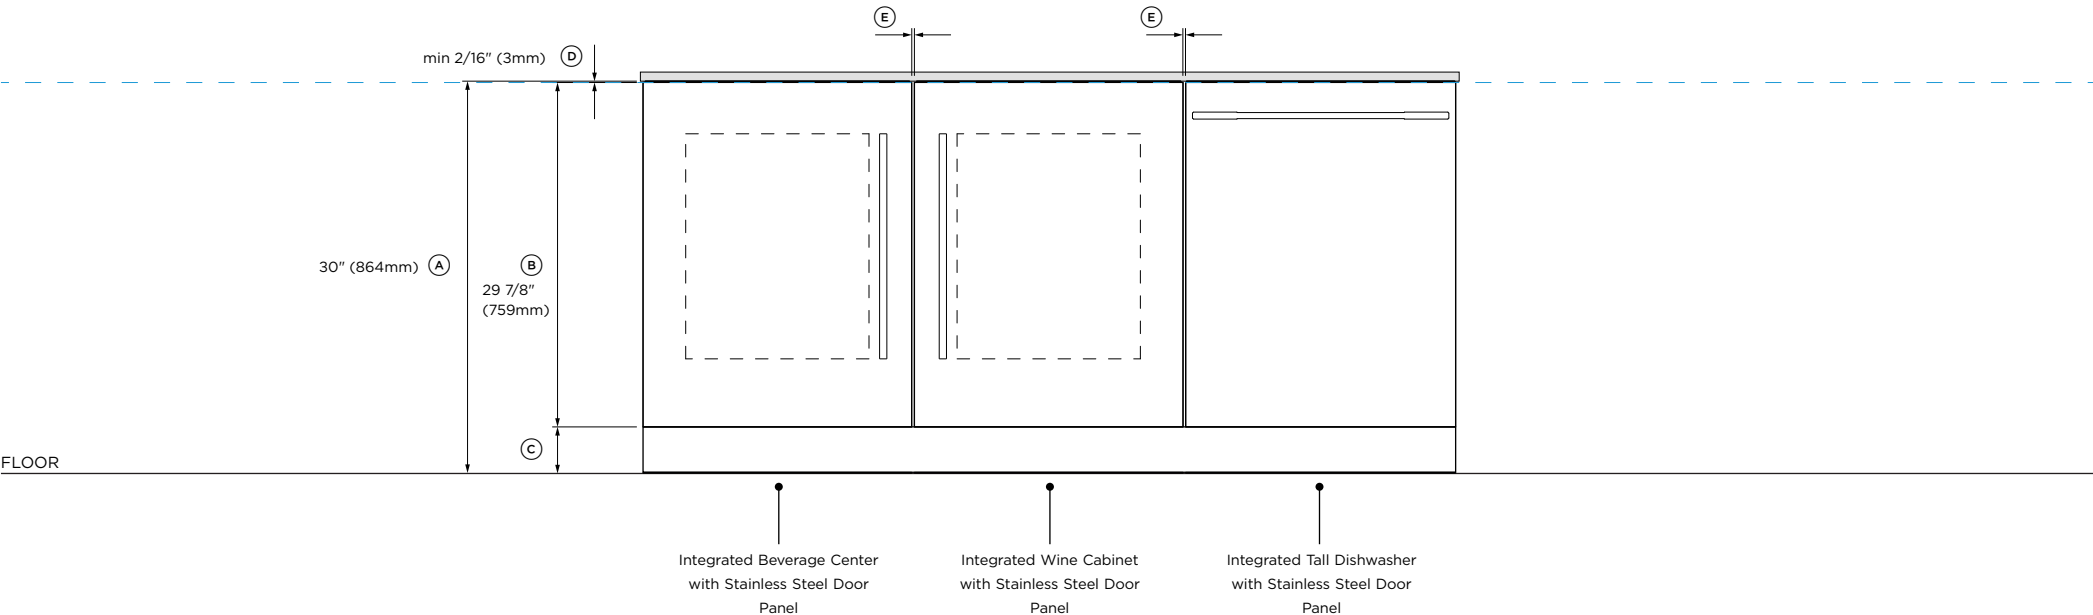

INTEGRATED BEVERAGE CENTER AND WINE CABINET 29 7/8" STAINLESS STEEL DOOR PANEL

- Stainless Steel Panel - Solid door
 - Left hinge - RD2434L
 - Right hinge - RD2434R
- Stainless Steel Panel - Glass door
 - Left hinge - RD2434VL
 - Right hinge - RD2434VR

Note: Handles are sold separately.

UNDERCOUNTER + TALL DISHWASHER ALIGNMENT

Product Dimensions		inch	mm
A	Cavity height*	34	864
B	Door panel height	29 7/8	759
C	Visual toe kick height	4	102
D	Gap between top of stainless steel door panel and the underside of the benchtop	min 1/8	min 3
E	Gap between stainless steel door panels (gaps equalized during installation)		
	- Dual installation	3/16	5
	- Triple installation	1/4	6

*Overall height to achieve a 4" (102mm) visual toe kick.
Note: Refer to the individual product Planning Guides for more information on stainless steel toe kicks.

INTEGRATED TALL DISHWASHERS

The 29 7/8" stainless steel door panel is to aligned with these integrated tall dishwashers.

- Series 9 Integrated Tall Dishwasher - DW24UT4I2
- Series 7 Integrated Tall Dishwasher - DW24UT2I3
- Door panel for Integrated Dishwasher, Tall - ADDW24TPX

Note: Handles are sold separately.



ALIGNMENT

Use the adjustable feet to align the product's stainless steel front door panel.


DATUM TOP OF DOOR PANEL

Ensure a minimum 1/8" (3mm) gap between the top of the stainless steel door panel and the underside of the benchtop.


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

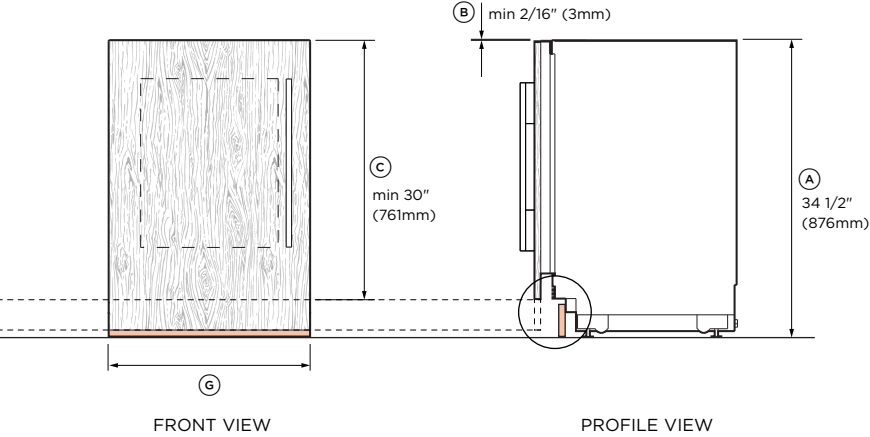

GRILLE AND TOE KICK
PROFILE VIEW



VIUSAL TOE KICK
PROFILE VIEW



TOE KICK DEPTH
PROFILE VIEW

Dimensions	inch	mm
Ⓐ Overall product height*	34 - 35 7/16	864 - 900
Ⓑ Height from top of door panel to under benchtop	1/8	3
Ⓒ Minimum custom door panel height	min 30	min 761
Ⓓ Custom toe kick panel height	min 3 15/16 max 5 1/8	min 100 max 131
Ⓔ Visual toe kick height	min 9/16 max 5 3/8	min 15 max 136
Ⓕ Depth of toe kick (excl. front door panel and toe kick panel)	2 - 3 15/16	50 - 100
Ⓖ Custom toe kick panel width		
- Single installation	23 5/16	592
- Dual installation	23 3/8	594
- Triple installation	23 7/16	594.5

*Drawing shows an overall product height of 34 1/2" (876mm).
Custom door panels and toe kick panel to be manufactured and fitted by cabinet maker.

GRILLE - CUSTOM DOOR PANEL

The grille is hidden at minimum custom door panel height.

VISUAL TOE KICK - CUSTOM DOOR PANEL

Custom door panel can be longer or shorter to achieve a smaller or bigger visual toe kick.

Head to 'Custom Panels Preparation' section of this planning guide to find out more about custom door panel heights.

TOE KICK DEPTH


The toe kick mounting bracket extends out to 2" (50mm).

To ensure proper alignment with the front of the grille, use a toe kick panel that is minimum of 5/8" (16mm) thick.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

Ø 1/16" (2.5mm) pilot holes,
all holes 5/8" (15mm) deep.
Do not penetrate front face.

All Fisher & Paykel handle holes Ø 4/16" (6mm).
Do not place handle holes in bracket hole locations.



PROFILE VIEW

Ensure a minimum 1/8" (3mm) gap between the top of the custom door panel and the underside of the benchtop.

Minimum custom door panel height 30" (761mm). Assistant Opening Accessory will be hidden at this height.

Height to match stainless steel door panel
height 30 3/8" (771mm).

Max product height of 35 7/16" (900mm), with a visual toe kick of 9/16" (15mm), requires a custom panel height of 34 3/4" (882mm).

Maximum custom solid door panel weight is 12.4lbs (5.6kg).

Technical drawing of a bracket showing front and side views with dimensions in inches and millimeters.

Front View Dimensions:

- Overall width: 23 5/16" (592mm)
- Overall height: 18 1/8" (460mm)
- Top flange width: 4 12/16" (121mm)
- Top flange height: 3 3/8" (85mm)
- Top flange thickness: 1 5/16" (33mm)
- Top flange mounting holes: 2 1/8" (54mm) and 4 3/4" (121mm) from centerline.
- Bottom flange width: 4 3/4" (121mm)
- Bottom flange height: 3 3/8" (85mm)
- Bottom flange mounting holes: 2 1/8" (54mm) and 4 3/4" (121mm) from centerline.
- Bracket body height: 30 3/8" (771mm)
- Bracket body width: 34 3/4" (882mm)
- Minimum height: 30" (761mm)


Side View Dimensions:

- Overall width: 23 5/16" (592mm)
- Overall height: 18 1/8" (460mm)
- Top flange width: 4 12/16" (121mm)
- Top flange height: 3 3/8" (85mm)
- Top flange thickness: 1 5/16" (33mm)
- Top flange mounting holes: 2 1/8" (54mm) and 4 3/4" (121mm) from centerline.
- Bottom flange width: 4 3/4" (121mm)
- Bottom flange height: 3 3/8" (85mm)
- Bottom flange mounting holes: 2 1/8" (54mm) and 4 3/4" (121mm) from centerline.
- Bracket body height: 30 3/8" (771mm)
- Bracket body width: 34 3/4" (882mm)
- Minimum height: 30" (761mm)

Notes:

- Do not place handle holes in bracket hole locations.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

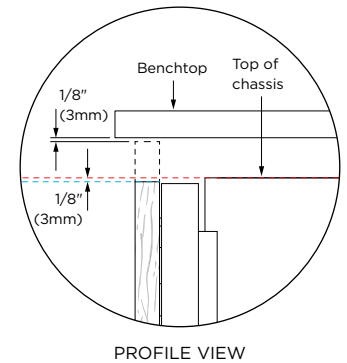

Ensure a minimum 1/8" (3mm) gap between the top of the custom door panel and the underside of the benchtop.


Minimum custom door panel height 30"
(761mm). Assistant Opening Accessory will be
hidden at this height.

Height to match stainless steel door panel height 30 3/8" (771mm).

Max product height of 35 7/16" (900mm), with a visual toe kick of 9/16" (15mm), requires a custom panel height of 34 3/4" (882mm).

Maximum custom glass door panel weight is
8.2lbs (3.7kg).

PAGE 20

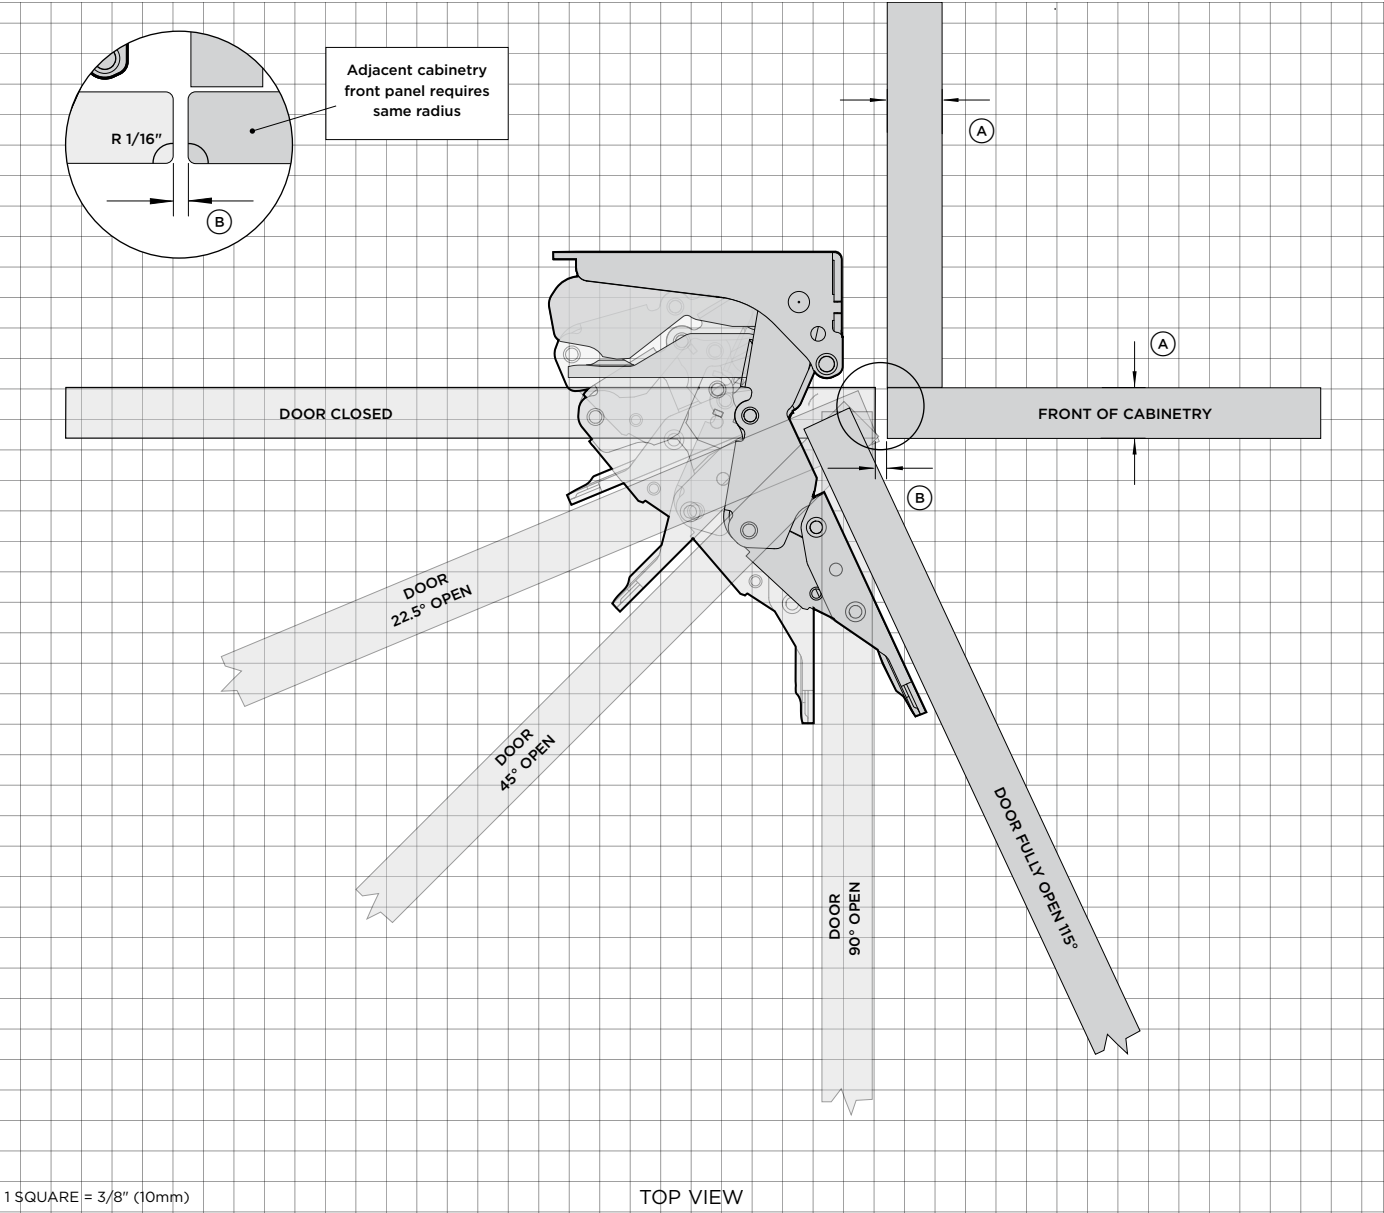

DOOR HINGE - HETTICH K08

Left hand hinge models are a mirrored version of shown.

CUSTOM FRONT PANEL

A Front panel thickness: 5/8"-3/4" (16mm-19mm).

Drawing shown with 11/16" (18mm) panels.

B Gap between custom panel and adjacent cabinetry: Min 5/32" (4mm)

RADIUS REQUIREMENTS

Gap: Minimum 5/32" (4mm)

Panel thickness 5/8"-3/4" (16mm-19mm): Requires minimum R1/16" (R2mm)

Panel thickness 25/32" (20mm): Requires minimum R3/16" (R5mm)

Minimum radius prevents clashes with adjacent cabinetry. Panels thicker than 25/32" (20mm) need a larger gap and radius, which might expose internal components.

WEIGHT LIMIT

Custom solid door panel: Max 12.4lbs (5.6kg)

Custom window door panel: Max 8.2lbs (3.7kg)


Note: Door weight's includes weight of handle.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.

designsupport@fisherpaykel.com

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

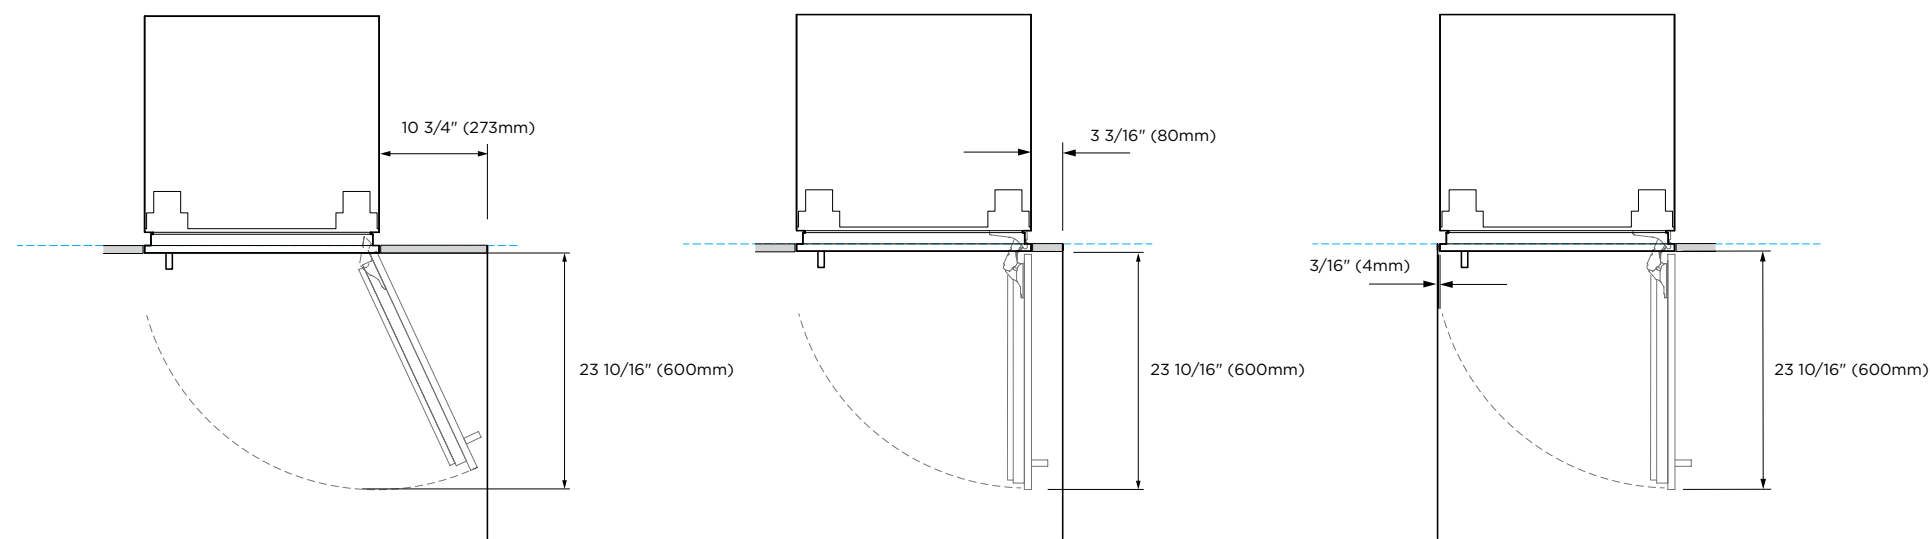

FULL INTERNAL ACCESS

115° door opening – full internal access

Minimum dimensions shown are for the contemporary handle kit AHD5RD35(B). Custom door panel and handle details need to be taken into account

REDUCED INTERNAL ACCESS

Use hinge limiting pin to restrict door opening to 90° where necessary

Minimum dimensions shown are for the contemporary handle kit AHD5RD35(B). Custom door panel and handle details need to be taken into account

REDUCED INTERNAL ACCESS

Use hinge limiting pin to restrict door opening to 90° where necessary



Minimum dimensions shown are for the contemporary handle kit AHD5RD35(B). Custom door panel and handle details need to be taken into account

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

HINGE TO HINGE

- Ⓐ Both doors open at the same time – requires space between models
- Ⓑ Only allows a single door open at a time

Minimum dimensions shown are for the contemporary handle kit AHD5RD35(B). Custom door panel and handle details need to be taken into account

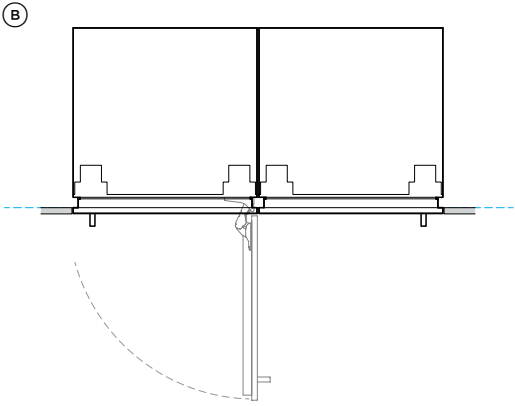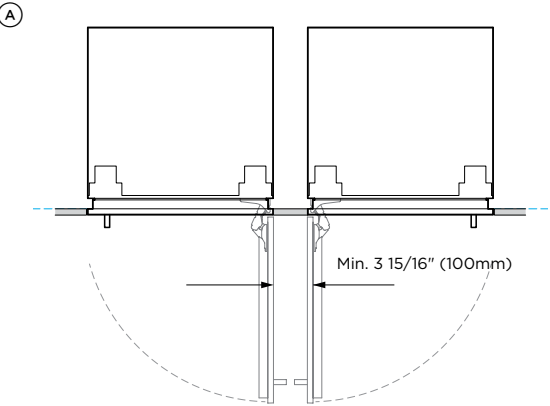



ADDITIONAL NOTES

Use hinge limiting pin to restrict door opening to 90° where necessary.

Minimum dimensions shown are for the contemporary handle kit AHD5RD35(B). Custom door panel and handle details need to be taken into account.



DUAL INSTALLATION

- Ⓒ Stainless steel door panels (gaps equalized during installation) – 3/16" (5mm)
- Ⓒ Custom door panels (width of custom door panel increased to maintain 4mm gap across multiple products) – 5/32" (4mm)

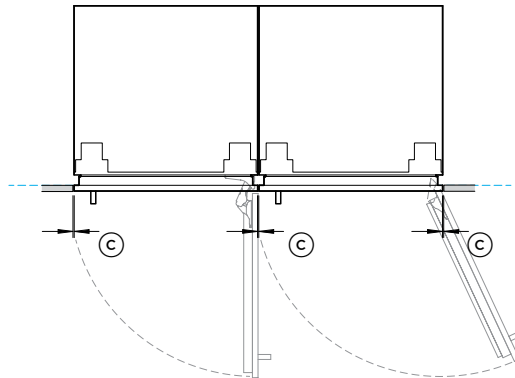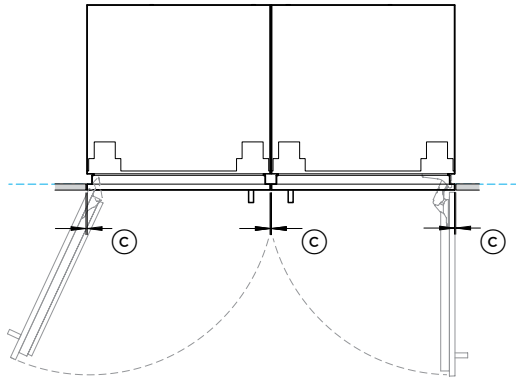


TRIPLE INSTALLATION

- Ⓓ Stainless steel door panels (gaps equalized during installation) – 1/4" (6mm)
- Ⓓ Custom door panels (width of custom door panel increased to maintain 4mm gap across multiple products) – 5/32" (4mm)

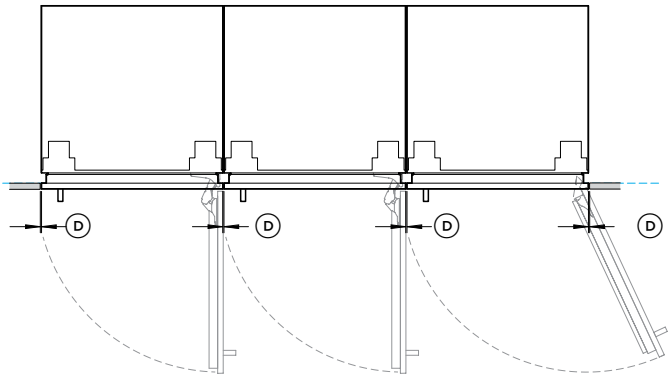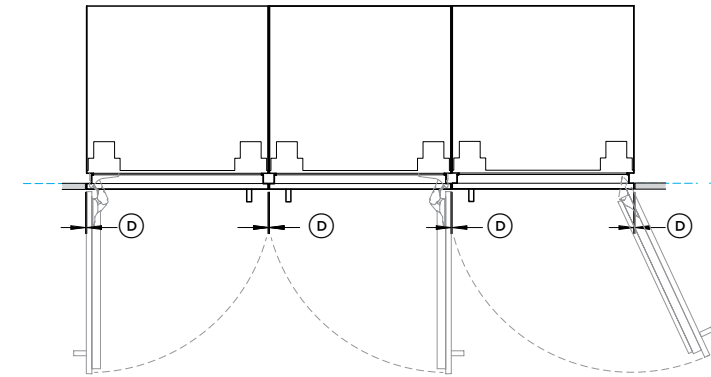

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available soon on our website fisherpaykel.com

SERVICES

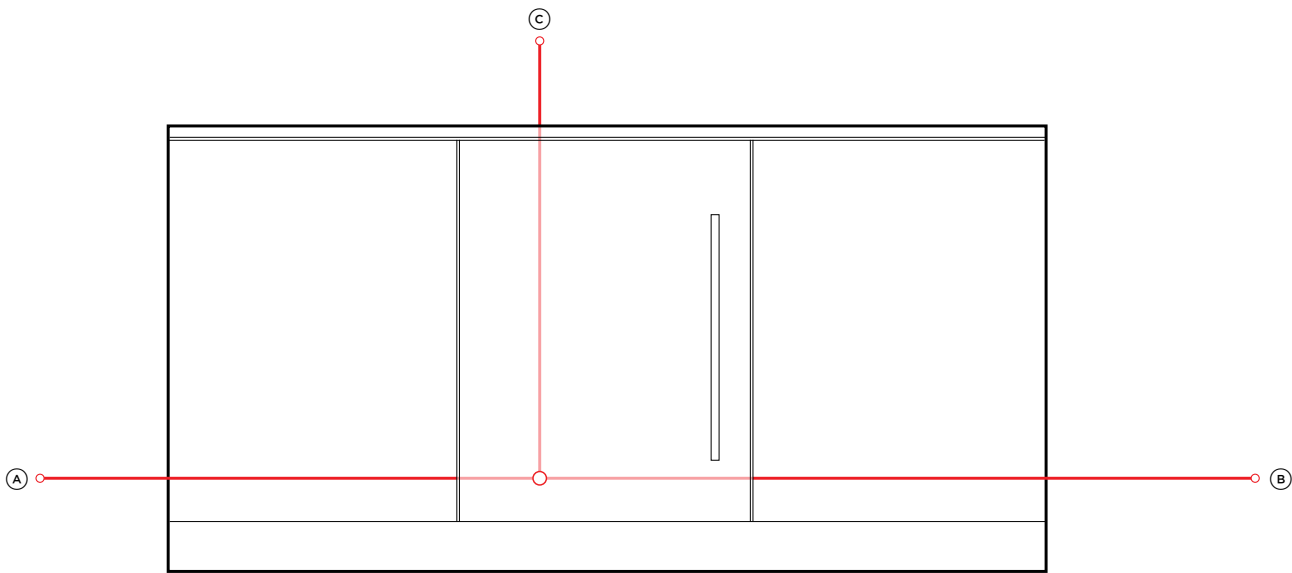

POWER AND WATER CONNECTIONS
Integrated Wine Cabinets & Integrated Beverage Centres

For Models:
Integrated Wine Cabinets - **RS2435V2RT1, RS2435V2R1**
Integrated Beverage Centers - **RS2435SBLT1, RS2435SBL1**

All models can achieve opposite hinge location using the supplied parts.
Please refer to Installation Guide for details.

Electrical Specifications	
Supply	115 V, 60 Hz
Service	10 A
Connection	Plug with flex cord

NOTE: Recommended that services are routed to the adjacent cabinet.

Cord Lengths Electrical	inch	mm
Ⓐ Power cord length (from the left edge of the product)*	70 14/16	1800
Ⓑ Power cord length (from the right edge of the product)*	78 12/16	2000
Ⓒ Power cord length (from the top of the product)*	55 2/16	1400


* Excluding plug.

Recommended that services are located in neighbouring cabinets

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES



IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

HANDLE DATA SHEETS

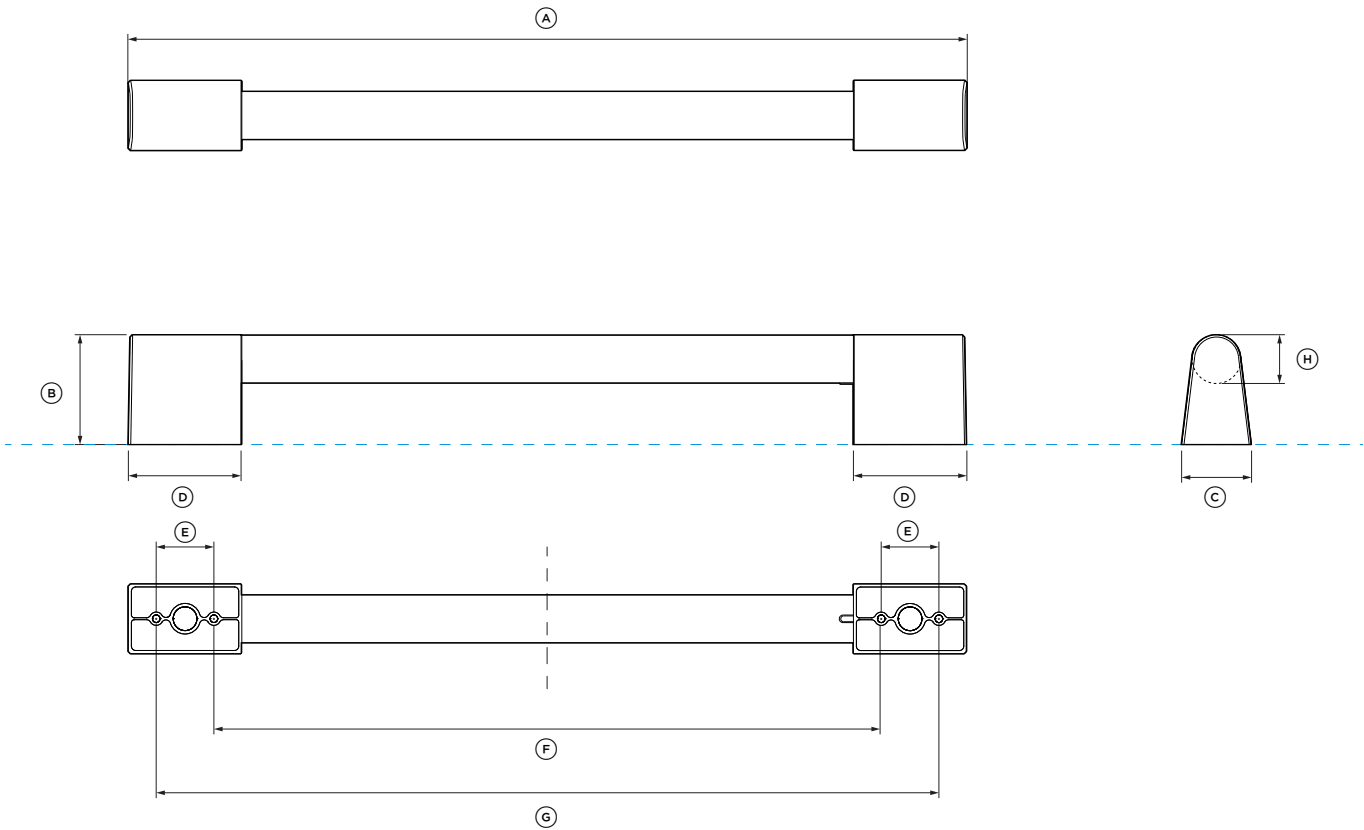

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 3/4 inch panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet & Integrated Beverage Center models


Model No:
Professional Handle AHP3RD35

For Models:
Integrated Wine Cabinets - **RS2435V2RT1, RS2435V2R1**
Integrated Beverage Centers - **RS2435SBLT1, RS2435SBL1**

Handle Dimensions	Inch	mm
A Overall length of handle	17 7/16	442
B Overall height of handle	2 5/16	58
C Overall width of handle	1 7/16	37
D Length of off-stand	2 6/16	60
E Distance between attachment holes	1 3/16	30
F Distance between inner attachment holes	13 15/16	353
G Distance between outer attachment holes	16 4/16	413
H Thickness of handle rail	1	25



INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

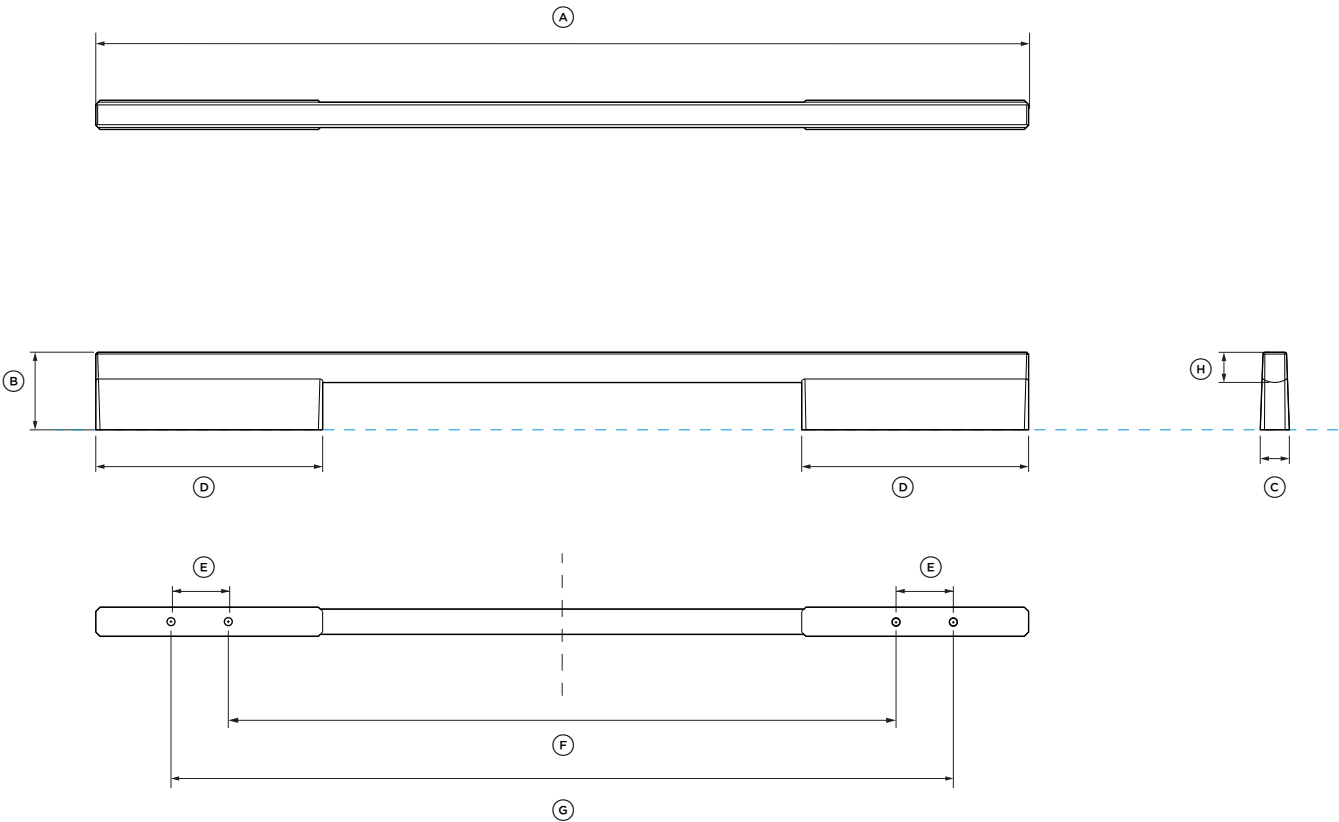

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 3/4 inch panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet & Integrated Beverage Center models


Model No:
Fine Aluminium Handle AHD5RD35

For Models:
Integrated Wine Cabinets - **RS2435V2RT1, RS2435V2R1**
Integrated Beverage Centers - **RS2435SBLT1, RS2435SBL1**

Handle Dimensions	Inch	mm
A Overall length of handle	19 7/16	493
B Overall height of handle	1 10/16	41
C Overall width of handle	10/16	15
D Length of off-stand	4 12/16	120
E Distance between attachment holes	1 3/16	30
F Distance between inner attachment holes	13 15/16	353
G Distance between outer attachment holes	16 4/16	413
H Thickness of handle rail	10/16	16



INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit [fisherpaykel.com](https://www.fisherpaykel.com)

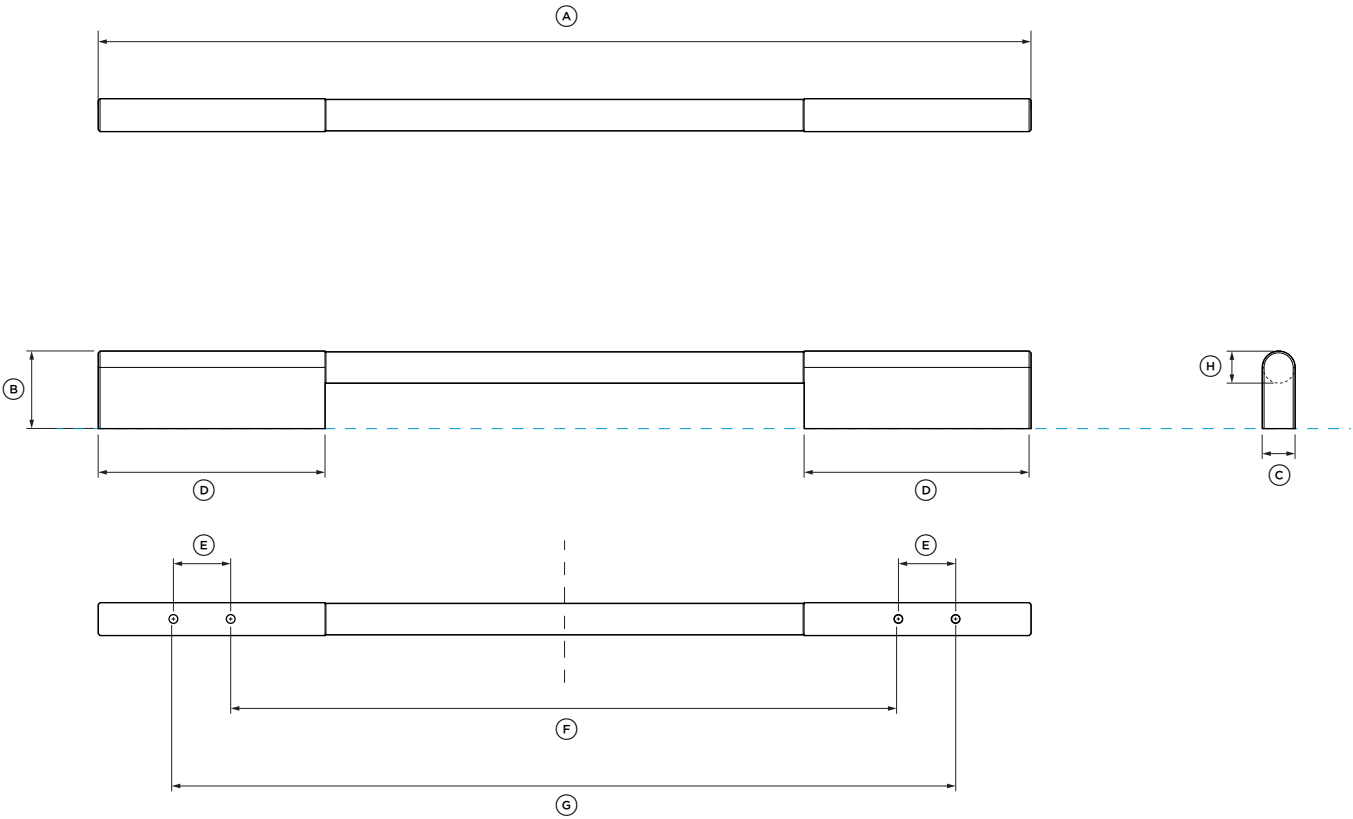

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 3/4 inch panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet & Integrated Beverage Center models


Model No:
Fine Round Handle AHSRD35

For Models:
Integrated Wine Cabinets - **RS2435V2RT1, RS2435V2R1**
Integrated Beverage Centers - **RS2435SBLT1, RS2435SBL1**

Handle Dimensions	Inch	mm
A Overall length of handle	19 7/16	493
B Overall height of handle	1 10/16	41
C Overall width of handle	11/16	17
D Length of off-stand	4 12/16	120
E Distance between attachment holes	1 3/16	30
F Distance between inner attachment holes	13 15/16	353
G Distance between outer attachment holes	16 4/16	413
H Thickness of handle rail	11/16	17



INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

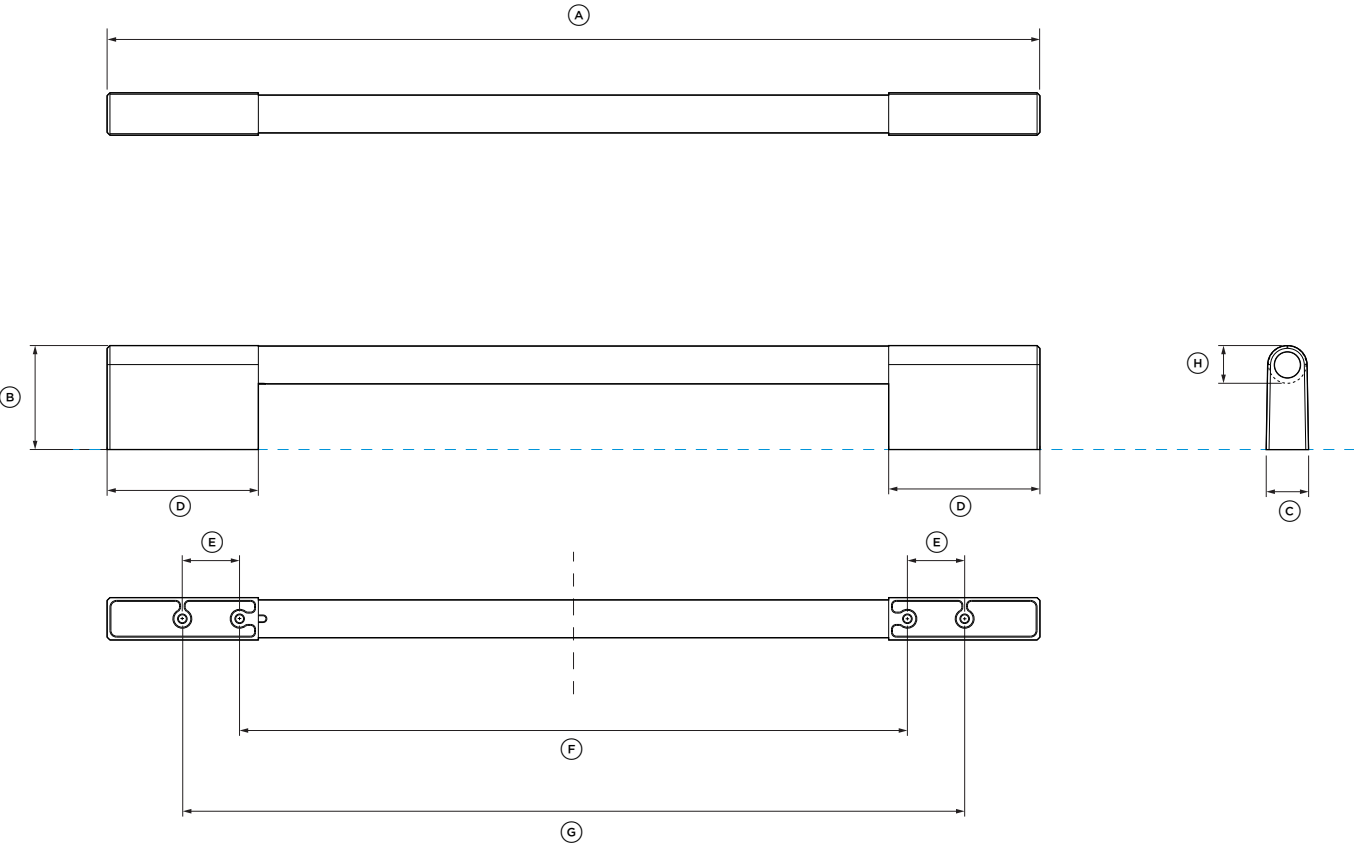

SCREWS

M5 X 12" Pan Head Socket Screw (4 per handle).
Suits standard 3/4 inch panel. Thicker panels may require counterboring or longer screws.



HANDLE DATA SHEET
For all Integrated Wine Cabinet & Integrated Beverage Center models

Model No:
Classic Handle AHCLRD35

For Models:
Integrated Wine Cabinets - **RS2435V2RT1, RS2435V2R1**
Integrated Beverage Centers - **RS2435SBLT1, RS2435SBL1**

Handle Dimensions	Inch	mm
A Overall length of handle	16 5/16	414
B Overall height of handle	2 3/16	55
C Overall width of handle	14/16	22
D Length of off-stand	3 3/16	80
E Distance between attachment holes	1 3/16	30
F Distance between inner attachment holes	13 15/16	353
G Distance between outer attachment holes	16 4/16	413
H Thickness of handle rail	13/16	20

INDICATES PRODUCT DATUM
INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com

