

DESIGNER

OKEANITO

WALL

DESIGNER:
FU-TUNG CHENG

ZEPHYR




ZEPHYRONLINE.COM



Shown in Stainless Steel



Shown in Brushed Gold

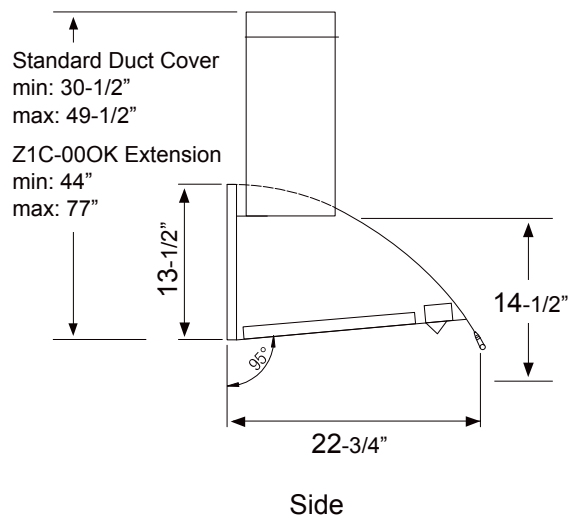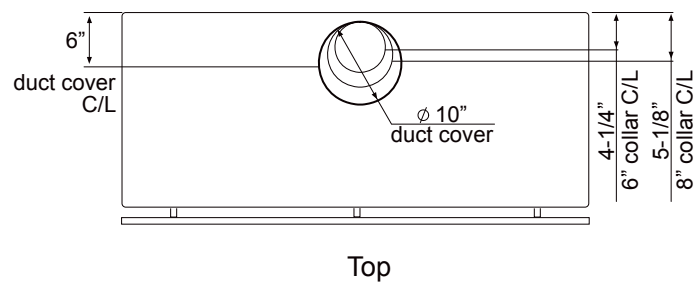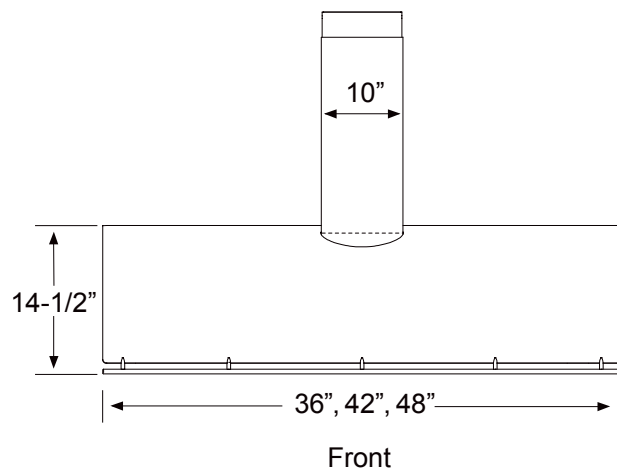

WALL

DESIGNER:
FU-TUNG CHENG

MODEL

Brushed Gold
Stainless Steel
Size

COK-E36CBGX
COK-E36CSX
36"

COK-E42CBGX
COK-E42CSX
42"

COK-E48CBGX
COK-E48CSX
48"

PERFORMANCE

Internal Blower (CBI-290C)*
Internal Blower (CBI-390A)*
Internal Blower (CBI-600A)*
In-Line Blower (PBN-1000A)*
External Blower (CBE-1000)*

200-290 CFM, 1.4-3 sones
200-390 CFM, 1.4-5 sones
240-600 CFM, 1.8-6 sones
500-1,000 CFM, sones NA
500-1,000 CFM, sones NA

200-290 CFM, 1.4-3 sones
200-390 CFM, 1.4-5 sones
240-600 CFM, 1.8-6 sones
500-1,000 CFM, sones NA
500-1,000 CFM, sones NA

200-290 CFM, 1.4-3 sones
200-390 CFM, 1.4-5 sones
240-600 CFM, 1.8-6 sones
500-1,000 CFM, sones NA
500-1,000 CFM, sones NA

FEATURES

Controls
Speed Levels
Auto Delay-Off
Directional Lighting
Ambient Lighting
Tri-Level Lighting
Filters
Wireless Remote Control Option
Recirculating Option
Extension Duct Cover
ADA Compliant

Electronic Touch Controls
3
Yes
LumiLight LED, 6W x2
LED, 4W x2
Yes, LumiLight LED
Professional Baffle
Yes, RF
No
Yes, Up to 12' Ceiling
Yes (with remote accessory)

Electronic Touch Controls
3
Yes
LumiLight LED, 6W x2
LED, 4W x2
Yes, LumiLight LED
Professional Baffle
Yes, RF
No
Yes, Up to 12' Ceiling
Yes (with remote accessory)

Electronic Touch Controls
3
Yes
LumiLight LED, 6W x4
LED, 4W x4
Yes, LumiLight LED
Professional Baffle
Yes, RF
No
Yes, Up to 12' Ceiling
Yes (with remote accessory)

DUCT SPECIFICATIONS

Vertical - Internal Blower
Vertical - External/In-Line Blower
Horizontal

6" Round
10" - 8"***
NA

6" Round
10" - 8"***
NA

6" Round
10" - 8"***
NA

AC POWER

Hood w/ CBI-290C
Hood w/ CBI-390A
Hood w/ CBI-600A
Hood w/ PBN-1000A
Hood w/ CBE-1000

120V, 60Hz, Max. 1.35A
120V, 60Hz, Max. 2.1A
120V, 60Hz, Max. 3.35A
120V, 60Hz, Max. 6.05A
120V, 60Hz, Max. 6.85A

120V, 60Hz, Max. 1.35A
120V, 60Hz, Max. 2.1A
120V, 60Hz, Max. 3.35A
120V, 60Hz, Max. 6.05A
120V, 60Hz, Max. 6.85A

120V, 60Hz, Max. 1.35A
120V, 60Hz, Max. 2.1A
120V, 60Hz, Max. 3.35A
120V, 60Hz, Max. 6.05A
120V, 60Hz, Max. 6.85A

OPTIONAL ACCESSORIES

Extension Duct Cover
Make-Up Air Kit

Z1C-000K
MUA006A (600 CFM)
MUA008A (1,000CFM)

Z1C-000K
MUA006A (600 CFM)
MUA008A (1,000CFM)

Z1C-000K
MUA006A (600 CFM)
MUA008A (1,000CFM)

Wireless Remote Control

14000005

14000005

14000005

MOUNTING HEIGHT RANGE***

26" - 36"

26" - 36"

26" - 36"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

3 years parts, 1 year labor

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height***	26" - 30"	26" - 36"	26" - 36"	26" - 36"	32" - 36"	NA	NA	NA
	EXTENSION DUCT COVER	NA	NA	26" - 28"	26" - 34"	26" - 36"	26" - 36"	26" - 36"	30" - 36"

*Blower sold separately.

**10" round duct connects to external and in-line blower. Must transition from 10" to 8" before duct passes through ceiling. A 10" to 8" adapter is included with external and in-line blowers.

***Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.