

# MONOGRAM 36" PREMIUM FULLY INTEGRATED SINGLE DOOR BOTTOM FREEZER (RIGHT-HAND DOOR SWING)

ZIC363IPVRH



Panels and handles  
are sold separately.

## BOTTOM FREEZER WITH INTEGRATED INSTALLATION

Concealed hinge offers a look of seamless perfection that installs flush with surrounding cabinetry

## 6-TEMPERATURE SETTING CONVERTIBLE DRAWER

The convertible drawer with 6 temperature settings allows you to choose temperatures best suited for storing cold drinks, meat, snacks, ice cream, produce or frozen items

## STATEMENT AND MINIMALIST COLLECTION REFRIGERATOR HANDLES (SOLD SEPARATELY)

Designed to enhance choice and customization, Statement and Minimalist Collection refrigerators do not come with handles, these must be chosen separately and ordered through a Monogram representative

## PANEL-READY EXTERIOR WITH SIX-WAY ADJUSTABILITY

Statement and Minimalist Collection refrigerators accept stainless steel panels, which can be ordered separately from Monogram or your cabinetmaker

## LED LIGHTING INSIDE REFRIGERATOR

Ramp-up LED interior lighting provides exceptional illumination throughout the fresh food compartment, accentuating the sophisticated interior and allowing you to easily see food in the refrigerator

## REFRIGERATOR WITH INTERNAL WATER DISPENSER

The water dispenser on the inside of the refrigerator leaves the outside looking clean and uncluttered

## REFRIGERATOR AIR FILTRATION ODOR REDUCING SYSTEM

The refrigerator deodorizer air filtration system helps keep your refrigerator fresh by scrubbing the air of food odors and gases

## WIFI-CONNECTED REFRIGERATOR

The WiFi refrigerator allows you to wirelessly control refrigerator settings from your smartphone, using an available app

## REFRIGERATOR WITH RAMP-UP LED INTERIOR SHELVES

LED-lighted refrigerator shelves provide exceptional illumination throughout the refrigerator compartment, accentuating the sophisticated interior and making contents easy to see

## REFRIGERATOR WITH ADJUSTABLE DOOR BINS

Finely crafted, adjustable aluminum door bins with glass accents offer easy access to beverages and quick-grab items

## ACCURATE, ELECTRONIC TOUCH CONTROLS

Upfront, electronic touch controls make it easy to adjust climate settings to create ideal food storage conditions

## REFRIGERATOR WITH SOFT-CLOSE DRAWERS

The innovative sliding mechanism helps the drawers close gently and completely

## HUMIDITY-CONTROLLED VEGETABLE AND FRUIT DRAWER

Enjoy additional storage flexibility that helps to preserve food freshness

## FACTORY-INSTALLED ICE MAKER

The water filtration system in the factory-installed ice maker supplies you with clean, fresh-tasting water and ice

## SABBATH MODE REFRIGERATOR

This refrigerator with Sabbath mode is designed to disable functions in accordance with Sabbath-observing practices



Panels and handles are sold separately.

### SPECIFICATIONS

|                     |                      |
|---------------------|----------------------|
| Overall Width       | 35 3/4" (90.8 cm)    |
| Overall Height      | 83 7/8" (213 cm)     |
| Overall Depth       | 24 3/4" (62.9 cm)    |
| Door Clearance      | see TOP VIEW **Dim A |
| Cutout Width        | 36" (91.4 cm)        |
| Cutout Height       | 84" (213.4 cm)       |
| Cutout Depth        | 25" (63.5 cm)        |
| Net Weight (approx) | 550 lbs (250 kg)     |


### ATTENTION ELECTRICIAN:

A 115 volt 60Hz., 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. For multiple unit installation, each unit requires separate individually properly grounded circuit or breaker and separate properly grounded 3-prong electrical receptacle recessed.

### ⚠ WARNING:

When installing appliance, you must use and follow the product installation instructions. These can be found with unit or on web at [monogram.com](http://monogram.com).


### OVERALL DIMENSIONS

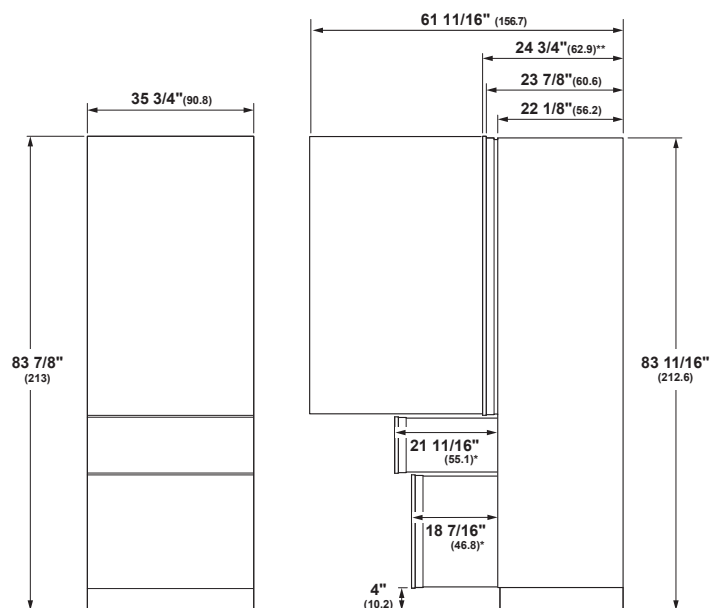

FRONT VIEW

SIDE VIEW

\*Depth dimension without handle.  
Statement handle adds 2 9/16" depth.  
Minimalist handle adds 2 1/8" depth.  
\*\*Includes 3/4" door panel

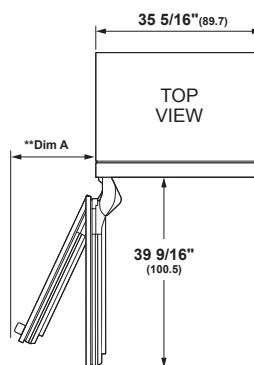


| Door Angle | Dim A            |                 |
|------------|------------------|-----------------|
|            | Door             | Handle          |
| 90°        | 2 3/16" (5.6)    | 6 3/4" (17.1)   |
| 115°       | 17 11/16" (44.9) | 21 9/16" (54.8) |


\*\*Dimensions based on handle height of 2 9/16" (6.5) and a hand clearance of 2" (5.1).

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

## SINGLE INSTALLATION

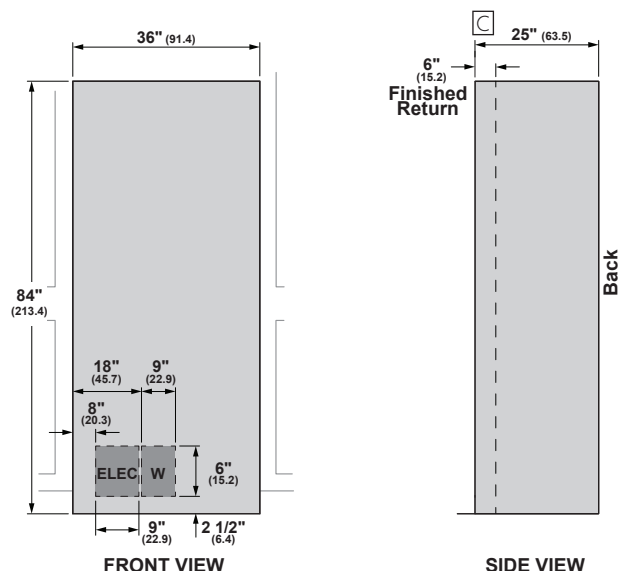

## FLUSH 3/4" PANEL DIMENSIONS SINGLE INSTALLATION

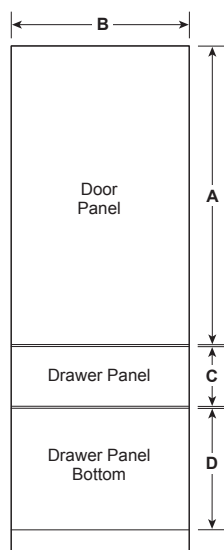

### PANEL DIMENSIONS

| A       | B       | C        | D        |
|---------|---------|----------|----------|
| 49 3/8" | 35 3/4" | 9 11/16" | 20 9/16" |

## INTEGRATED INSTALLATION

### HELPFUL TIPS


- C A minimum 6" (15.2) finished return matching cabinet exterior recommended on interior on all sides and top at front of opening
  - Trimmed refrigerators are designed to be customized with decorative panels. Field-installed 3/4" custom door panels are required.
- Maximum total panel weight:
  - Fresh Food Door - 39.2 lbs.
  - Convertible Drawer - 7.6 lbs.
  - Freezer Drawer - 17.2 lbs.
 Note: For panels constructed with rails and stiles (5-panel), the rails and stiles must be a minimum of 2" (5.08cm) wide.
- For Custom Panels: Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.
- Custom Panels require a custom handle from cabinetmaker or the ZKPN Handle Mounting Kit, which is required when using Statement or Minimalist handles (sold separately). Panel routing is required to use ZKPN kit; see ZKPN kit installation instructions for details.
- Stainless steel handle and panel options:
  - ZK3SN364WRH: Right-hand Single Door Bottom Freezer
  - Stainless Steel door panel kit
  - ZKSB3H3CVSS: Minimalist handle kit
  - ZKSB3H3PVSS: Statement handle kit
- GE SmartConnect™ Refrigerator Tubing Kits:
  - The only Monogram-approved plastic tubing is supplied in the SmartConnect Refrigerator Tubing kits.
  - WX08X10006: Water Line 8' (2.5m)
  - WX08X10015: Water Line 15' (4.6m)
  - WX08X10025: Water Line 25' (7.6m)

### **⚠ WARNING:**

When installing appliance, you must use and follow the product installation instructions. These can be found with unit or on web at [monogram.com](http://monogram.com).

## DUAL INSTALLATION

36" INTEGRATED BOTTOM FREEZER (LEFT-HAND DOOR SWING), ZIC363IPVLH  
 36" INTEGRATED BOTTOM FREEZER (RIGHT-HAND DOOR SWING), ZIC363IPVRH

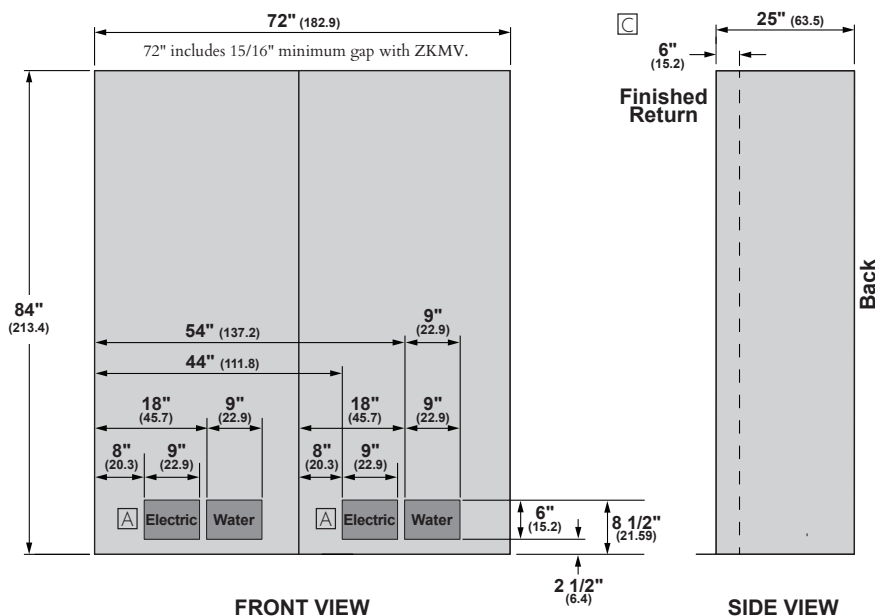


## INTEGRATED INSTALLATION

### HELPFUL TIPS

- [A] A separate 115V, 60Hz, 15- or 20-amp power supply is recommended for each product.
- [B] Cutout based on installation of two products with a left-and-right-hand door swing.
- [C] A minimum 6" (15.2) finished return matching cabinet exterior recommended on interior on all sides and top at front of opening.

ZKMV Unification kit is required for all dual installations with this product.


## DUAL PRODUCT CLEARANCES

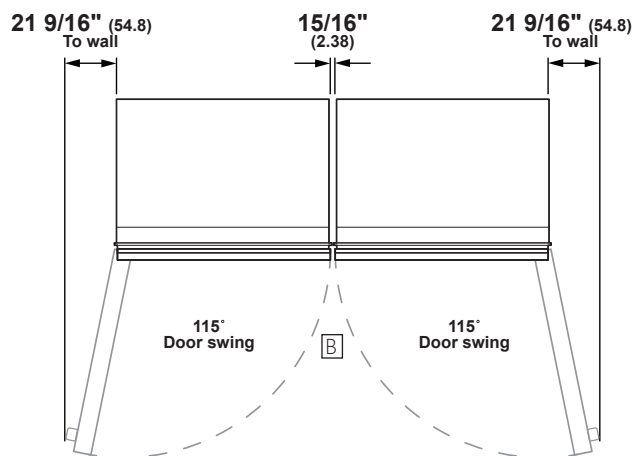

\*\*Dimensions based on Statement Handle height of 2 9/16" (6.5) and a hand clearance of 2" (5.1).

## FLUSH 3/4" PANEL DIMENSIONS DUAL INSTALLATION

36" BOTTOM FREEZER (LEFT-HAND DOOR SWING), ZIC363IPVLH  
 36" BOTTOM FREEZER (RIGHT-HAND DOOR SWING), ZIC363IPVRH

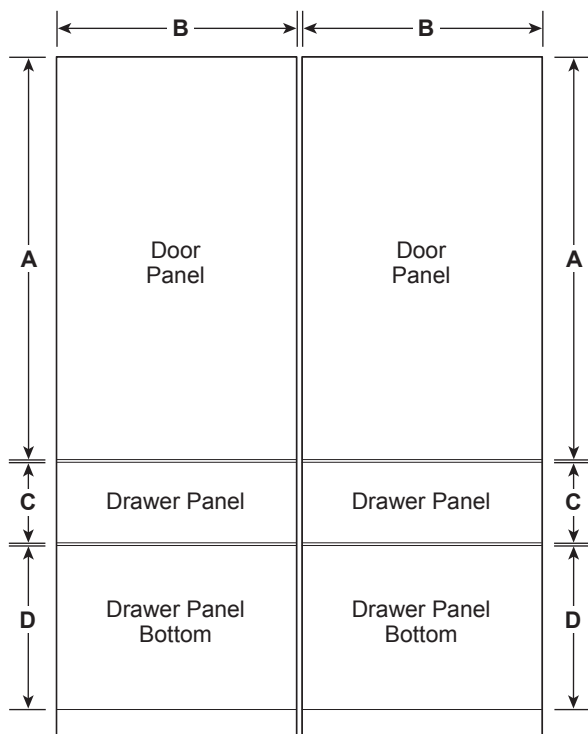

### PANEL DIMENSIONS

| A       | B         | C        | D        |
|---------|-----------|----------|----------|
| 49 3/8" | 35 13/16" | 9 11/16" | 20 9/16" |

## INTEGRATED INSTALLATION

### HELPFUL TIPS

- Trimmed refrigerators are designed to be customized with decorative panels. Field-installed 3/4" custom door panels are required.
- Maximum total panel weight:  
 Fresh Food Door - 39.2 lbs. Convertible Drawer - 7.6 lbs. Freezer Drawer - 17.2 lbs.  
 Note: For panels constructed with rails and stiles (5-panel), the rails and stiles must be a minimum of 2" (5.08cm) wide.
- For Custom Panels: Use templates provided with units to pre-drill holes for mounting panel brackets (provided with unit). Adjustment screws and instructions also provided with units.
- Custom Panels require a custom handle from cabinetmaker or the ZKPN Handle Mounting Kit, which is required when using Statement or Minimalist handles (sold separately). Panel routing is required to use ZKPN kit; see ZKPN kit installation instructions for details.
- Stainless steel handle and panel options:  
 ZK3SN364WRH: Right-hand single door bottom freezer stainless steel door panel kit  
 ZK3SN369WLH: Left-hand single door bottom freezer stainless steel door panel kit  
 ZKSB3H3CVSS: Minimalist handle kit  
 ZKSB3H3PVSS: Statement handle kit
- Dual installation accessory kits:  
 ZKN72V: 72" stainless full-width toe-kick  
 ZKMOV: Integrated bottom-freezer unification/heater kit