




Glass Door SKU: **ARG3PV** • Solid Door SKU: **ARS3PV**

3 Cu.Ft. Counter Height Vaccine Refrigerator

34" H x 18.5" W x 19" D (86 cm H x 47 cm W x 48 cm D) • **3 cu.ft.** (85 L)

Designed and purpose-built for pharmacy, medication, and vaccine applications to support meeting CDC/VFC/VFA guidelines, with antimicrobial handle



Advanced Temperature Control

- Intelligent microprocessor digital temperature controller
- Improved temperature accuracy with a buffered probe in glycol-filled bottle to simulate temperature of stored product
- Additional sensor reads interior air temperature for superior temperature control
- Adjustable operating control range from +2°C to +8°C (+35.6°F to +46.4°F)
- Digital display of the min/max temperature (updated in 15 minute increments)
- Temperature viewable in Celsius and Fahrenheit to the nearest tenth of a degree
- Password protection of control parameters beyond setpoint
- Optimized forced air cooling for excellent temperature stability and uniformity with rapid recovery after door openings and product loading



Fully Featured Interior for Convenient Storage

- Energy efficient LED lighting with internal on/off switch
- Adjustable plastic-coated wire shelves for improved circulation
- Multiple shelf positions spaced at ½" to allow flexible adjusting to support smaller items
- Adjustable cycle defrost operation
- ½" probe port included to accept user-provided monitoring equipment



Multiple Alarms for Safer Monitoring

- Audible/visual alarms for high/low temperature excursions
- Open door alarm sounds if the door is left ajar (default 4 minutes with selectable 1-99 minute range)
- Audible power failure and sensor failure alarms
- Mute function for alarms
- Remote alarm contacts in rear of the unit



Quality Design for Reliable Performance

- Hospital grade cord with a green dot plug
- Powder-coated handle with naturally occurring silver ions to reduce the spread of germs
- Self-closing door offers added storage protection
- User-reversible door swing (self-closing function compatible with RHD position only)
- Environmentally-friendly natural hydrocarbon refrigerant for reduced global warming potential
- Meets EPA and SNAP requirements
- Convenient security with a top-mounted door lock (2 keys included)
- Magnetic gaskets to ensure a positive seal
- Pyxis®, Omnicell® and AcuDose RX® compatible



EXTENDED WARRANTY
2-year parts & labor
5-year compressor



ADA OPTIONS
32" high choices
for use under lower
ADA compliant counters



ECO-FRIENDLY
Uses environmentally
friendly hydrocarbons
for a greener footprint




NEW OPTIONS
Keyless locks, interior
lockers, & full-extension
drawers now available

ARG3PV/ARS3PV Specifications

Overview	
Height of Cabinet	34.0" (86 cm)
Width	18.5" (47 cm)
Width with Door Open	19.0" (48 cm)
Depth	19.0" (48 cm)
Depth with Handle	20.75" (53 cm)
Depth with door at 90°	36.0" (91 cm)
Capacity	3.0 cu.ft. (85 L)
Defrost Type	Automatic
Door (ARS3PV)	White
Door (ARG3PV)	Glass
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	0.6
Voltage/Frequency	115 V AC/60 Hz
Weight	87.0 lbs. (39 kg)
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
UPC	761101062549

Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Shelf Type	Wire
Shelf Qty	4
Adjustable Shelves	Yes
Thermostat Type	Digital
Fan Type	Interior
Refrigerant Type	R600a
Refrigerant Amount	1.06 oz.
Interior Light	Yes
Temperature Range	2 to 8°C
Sound Level	37.6 dB

Interior	
Interior Height	28.38" (72 cm)
Interior Width	15.25" (39 cm)
Interior Depth	11.75" (30 cm)
Compressor Step Height	8.0" (20 cm)
Compressor Step Width	15.25" (39 cm)
Compressor Step Depth	3.75" (10 cm)

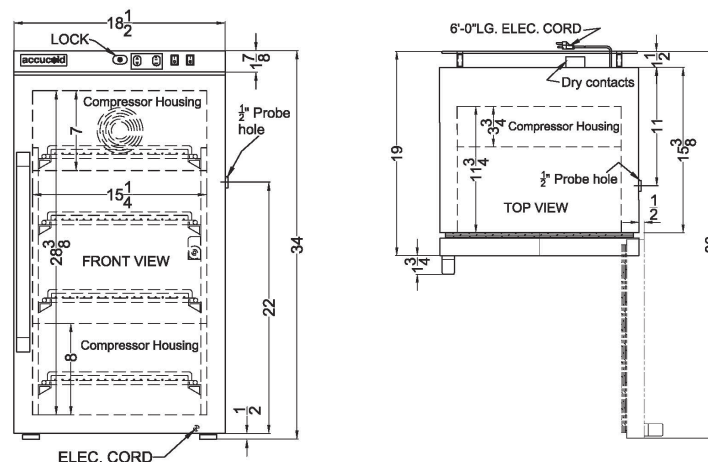


Advanced Temperature Control


Test Results

PHARMA-VAC Refrigerator @ 5°C


Multiple probes - Content Probe (1 oz.) and Air Temperature Probe

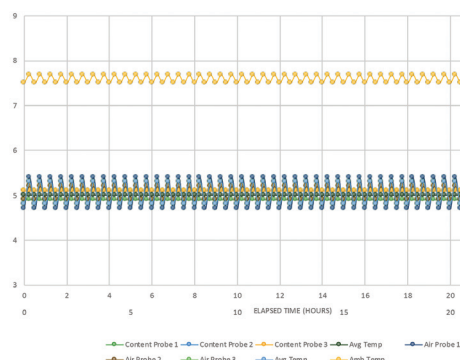

Whisper Quiet Performance



Energy Conservation

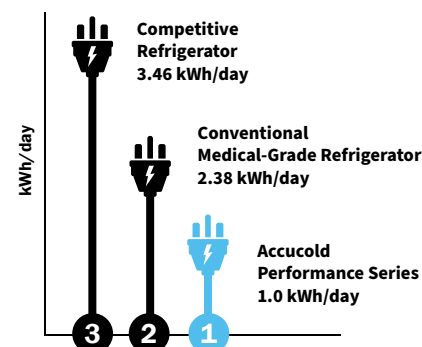

Popular Options & Support

- NSF/ANSI 456 Certification
- NIST Calibrated DDL
- Keyless Entry Locks
- Internal Lockers or Drawers
- Preventative Maintenance

Call **888.4.MEDLAB** for more information

accucold

ACCUCOLD DIVISION, FELIX STORCH, INC. • ISO 9001:2015 CERTIFIED

770 Garrison Avenue, Bronx, NY 10474 USA • TEL: 718.893.3900 • FAX: 844.478.8799 • info@accucold.com • accucold.com