



24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®

WM72200W



Key Features & Benefits

Large Capacity

This Large Capacity Washer lets you clean more in a single load, saving both time and energy while delivering perfect washing results.

Allergen Cycle

The Allergen Cycle utilizes high water temperatures to break down and eliminate allergens like pollen, dust, cigarette smoke, and pet dander, ensuring a cleaner, healthier wash.

Quick Wash

When time is tight and you need your outfit washed in a hurry, Blomberg's Quick Wash Cycle delivers super-fast results for smaller loads—so you can move on without worry.

ENERGY STAR®

Blomberg believes that conscious living should extend to clothing care. That's why we bring intelligent energy and water conservation to the laundry room. All our washers are ENERGY STAR® certified and feature automatic water adjustment for every load, ensuring efficiency and sustainability.




GENERAL PROPERTIES	
Drum Material	Stainless Steel
Style	Front Loading
Capacity	1.95 cu.ft.
Connectivity	N/A
Stackable	Yes
Matching Dyer	DV17600W
MAIN FEATURES	
Maximum Spin Speed	1,200 RPM
Variable Spin Speed	Yes
Unbalance Detection System	Yes
Automatic Temperature Control	Yes
Interior Light	No
Leak Protection System	Yes
Automatic Water Adjustment System	Yes
Delay Start Time	0-19 Hours
Time Remaining Indicator	Yes
Dispenser Drawer	Yes
Door Lock Indicator	Yes
Child Lock	Yes
Adjustable Leveling Legs	4
DIMENSIONS	
# of Wash Cycles	15
Cotton/Normal	Yes
Permanent Press	Yes
Heavy Duty	Yes
Mixed Fabric	Yes
Alergen	Yes
Rinse	Yes
Spin & Drain	Yes
Tub Sanitize	Yes
Hand Wash/Wool	Yes
Down Wear	Yes
CoolClean	Yes
Delicates/Dark	Yes
Sportswear	Yes
Organic	Yes
Quick Wash	Yes
DIMENSIONS	
Product Dimensions (H x W x D)	33 5/64" x 23 5/8" x 21 1/4"
Product Weight	154.3 lbs.
TECHNICAL DETAILS	
Motor	Optimal Inverter
Voltage	120 V
Frequency	60 Hz
Rated Current Amps	10 Amp
Plug	Wall Receptacle
EFFICIENCY	
ENERGY STAR® Certified	Yes
Annual Energy Consumption (kWh/year)	86




24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®

WM72200W

Dimensions and Installation

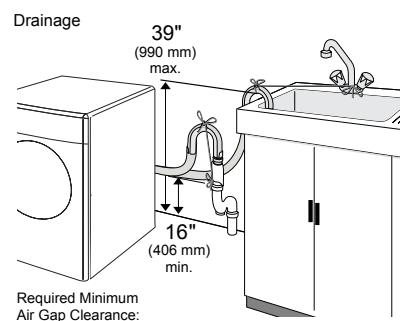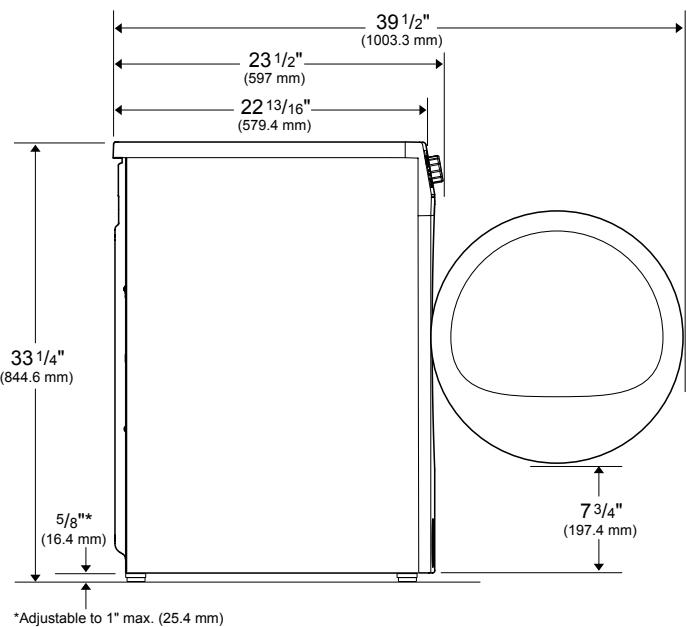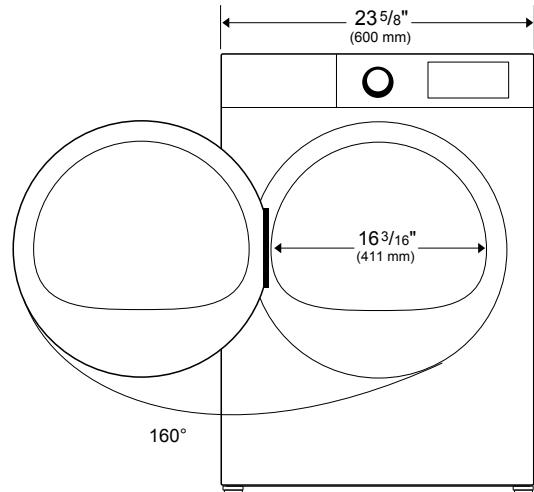

Water Supply Connection

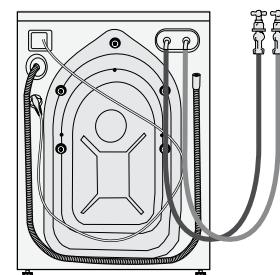

1 YEAR	2 YEARS
FULL WARRANTY	PARTS WARRANTY

NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko Canada Inc. and Beko US Inc., reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website (Canada) www.blombergappliances.ca / (USA) www.blombergappliances.com or call (Canada) 855-643-2356 / (USA) 888-352-2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

Canada: 855-643-2356 | www.blombergappliances.ca
USA: 888-352-2356 | www.blombergappliances.com




24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®

WM72200W

Dimensions and Installation

Clearances for Undercounter Installation

Only Washer

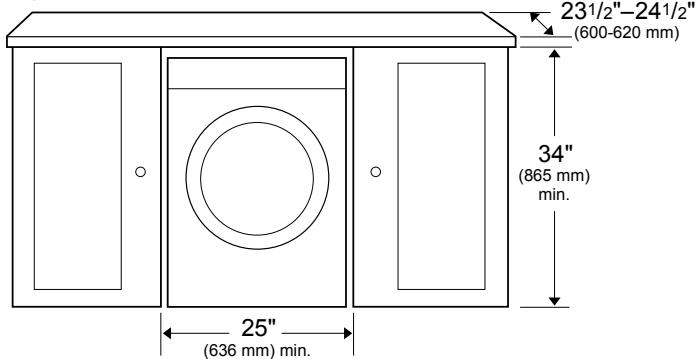


Required Minimum Clearances: (Stand Alone, Side by Side, or Stacked)

Washer	Vented Dryer	Heat Pump Dryer
Top: 1" (25 mm)	Top: 1" (25 mm)	Top: 1" (25 mm)
Sides: 1/2" (13 mm)	Sides: 3/16" (4 mm)	Sides: 1/2" (13 mm)
Rear: 1/2" (13 mm)	Rear: 4" (101.6 mm)	Rear: 1/2" (13 mm)
Front: xxxxx	Front: 3/16" (5 mm)	Front: 3/16" (5 mm)


Clearances for Undercounter Installation

Both Washer and Vented Dryer

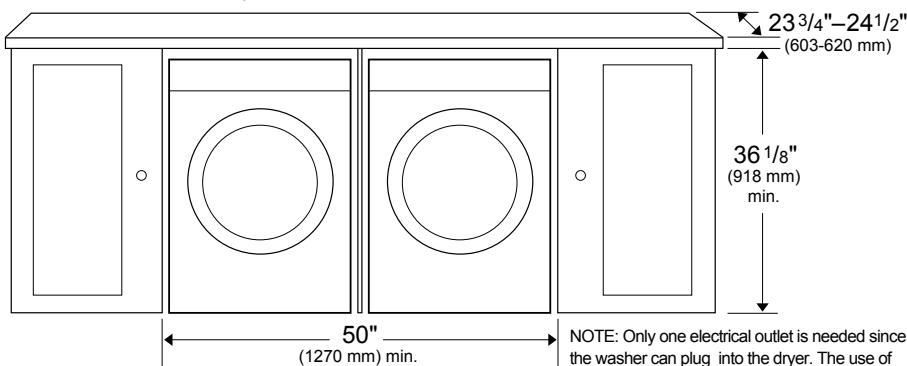

Clearances for Undercounter Installation

Both Washer and Heat Pump Dryer

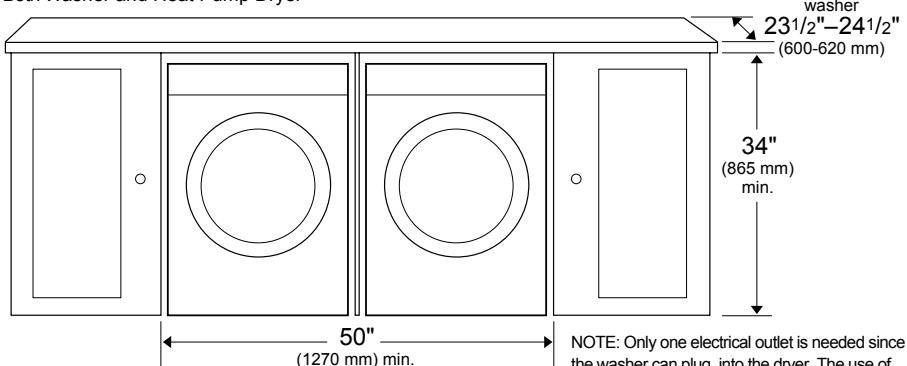

Closet Door Ventilation Requirement

Washer:

A louver having minimum 23 in² (148 cm²) air opening located at 3 in (7.62 cm) distance from the bottom of closet door.

Vented Dryer:

A louver having minimum 46 in² (297 cm²) air opening located at 3 in (7.62 cm) distance from the top of closet door.

Heat Pump Dryer:

Closest door must have 2 openings, one located 3.2 inches (8 cm) from bottom of door having a minimum area of 16 in² (103 cm²) and the other one located 3 inches (7.5 cm) from top of door having a minimum area of 46 in² (294 cm²).




24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®

WM72200W

Dimensions and Installation

Stacked Installation – Washer and Vented Dryer

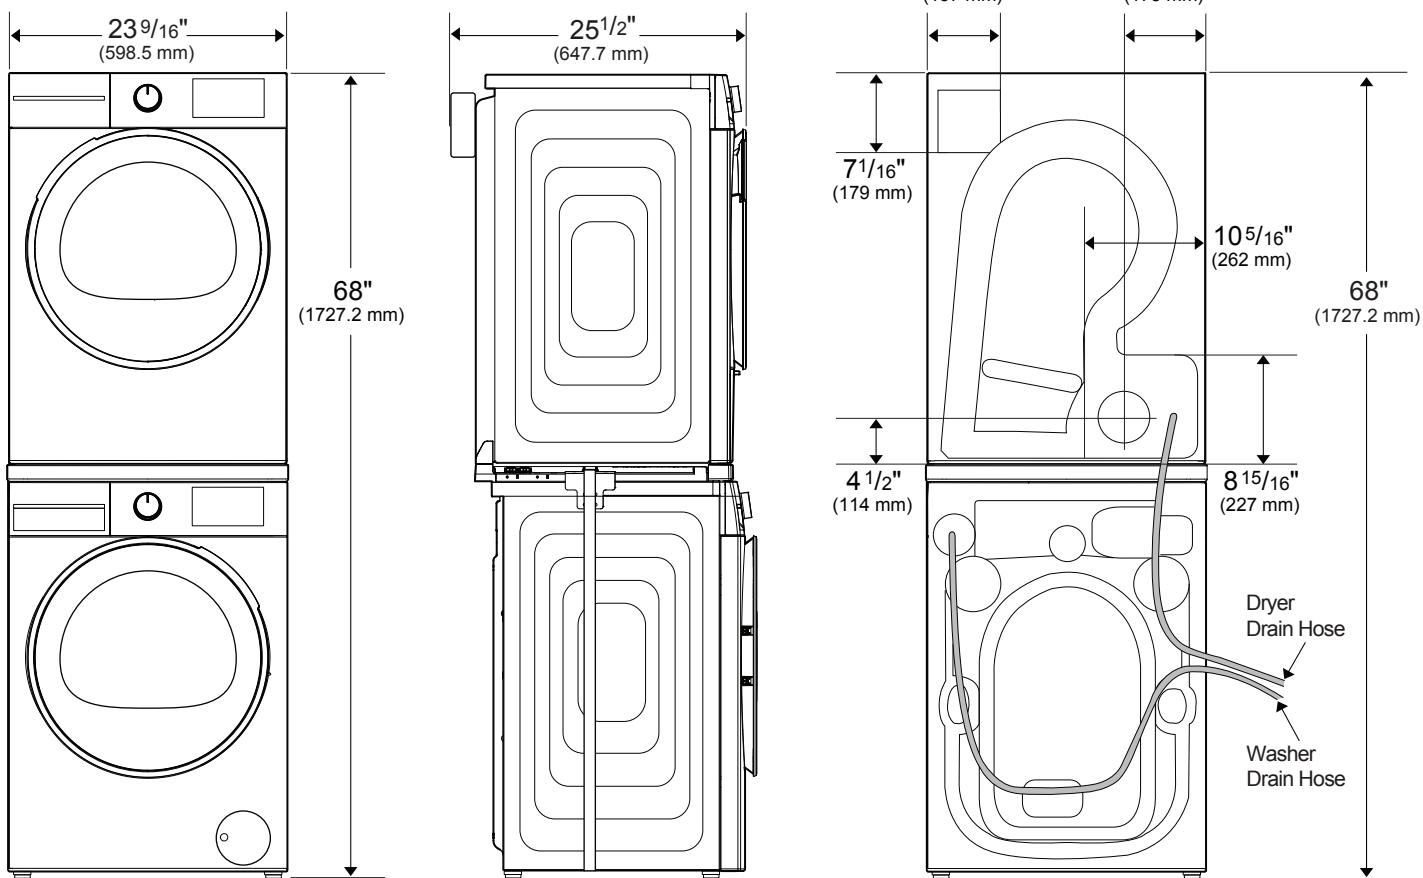

NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.




24" 1.95 cu.ft. Front Load Washer, ENERGY STAR®


WM72200W

Dimensions and Installation

Stacked Installation in Closet or Enclosed Space – Washer and Vented Dryer

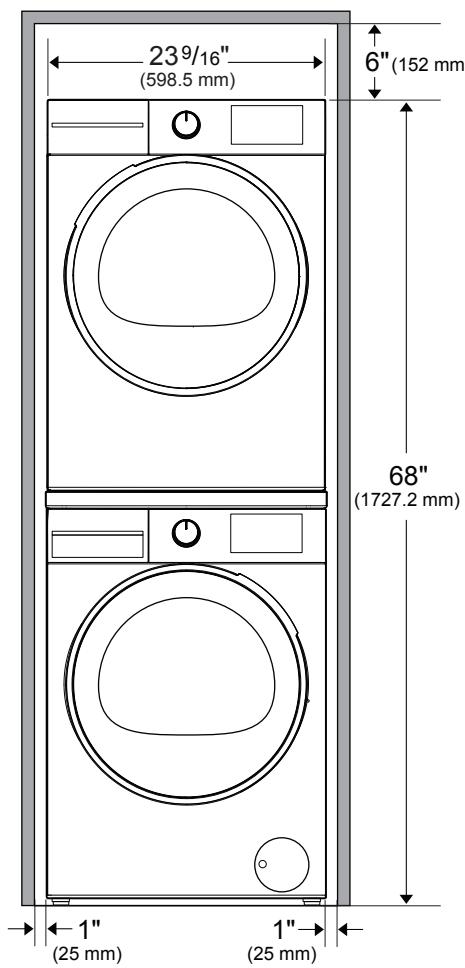


NOTE: Only one electrical outlet is needed since the washer can plug into the dryer. The use of two electrical outlets may be used as an alternative.

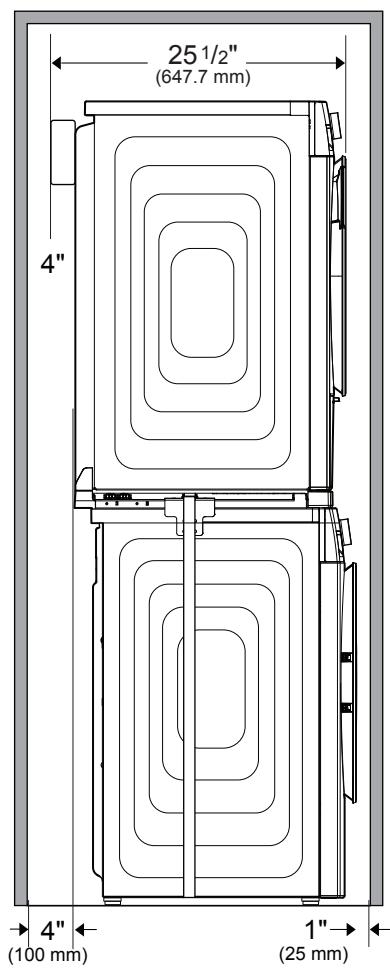

NOTE: The 4" clearance that is required should be measured from the back of the dryer cabinet, NOT from the junction box located at the top rear of the dryer.

NOTE: The 4" clearance is NOT measured from the back of the washer cabinet.

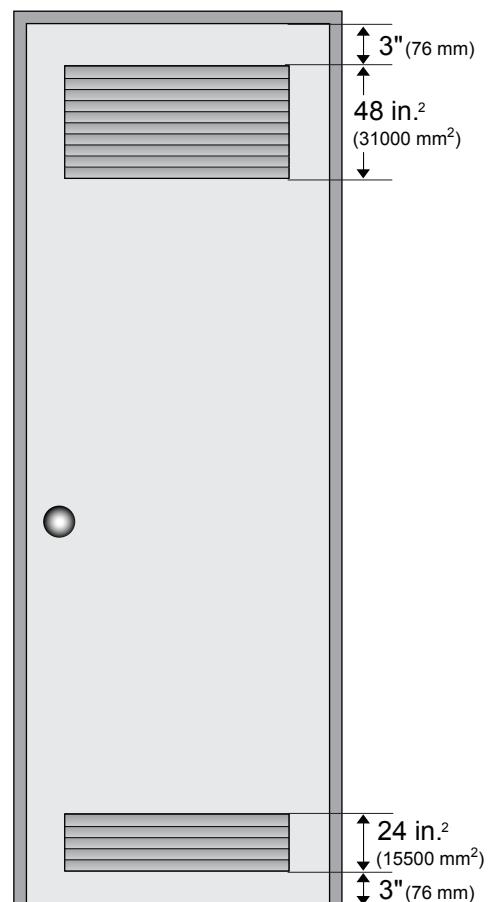

NOTE: The front of the closet must have two unobstructed air openings for a combined minimum total area of 72 sq.in. (465 sq.cm) with a minimum clearance of 3 in. (76 mm) at the top and bottom. A slatted door with equivalent space clearance is acceptable.