

**INTEGRATED FRENCH DOOR REFRIGERATOR
FREEZER**

PLANNING GUIDE

SERIES 7 | RS36A72U1 N | RS36A72J1 N | RS32A72U1 | RS32A72J1

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Specification guide		Data sheets		Custom Door Panel Preparation	
RS36A72J1 N, RS32A72J1	4	RS36A72J1 N	11	36" Models	22
RS36A72U1 N, RS32A72U1	5	RS36A72U1 N	12	32" Models	23
		RS32A72J1	13		
Design choices		RS32A72U1	14	Services	
Product options	7			RS36A72J1 N	25
Handle accessories	8	Planning Considerations		RS36A72U1 N	26
Stainless steel panel accessories	9	Cavity specifications	16	RS32A72J1	27
		Service specifications	17	RS32A72U1	28
		Custom panel extension	18		
		Hinge articulation	19	Handles - data sheets	
		Door opening clearance	20	RS36 Contemporary square fine handle	30
				RS36 Contemporary Round	31
				RS36 Classic handle	32
				RS36 Professional round flush	33
				RS32 Contemporary square fine handle	34
				RS32 Contemporary Round	35
				RS32 Classic handle	36
				RS32 Professional round flush	37

SPECIFICATION GUIDE



OVERVIEW

This roomy refrigerator with bottom freezer seamlessly integrates into the kitchen, fitting flush into the cabinetry. Customise with kitchen cabinetry or our stainless steel door panel accessory. Select one of our handle options or go custom to match any kitchen style.

PRODUCTS*

RS36A72J1 N

Integrated French Door Refrigerator Freezer, 36" wide

RS32A72J1

Integrated French Door Refrigerator Freezer, 32" wide

*Some models may not be available in all markets, please check fisherpaykel.com for more information.

OPTIONS

Integrated Custom Panels

Customise with your own kitchen cabinetry

Stainless Steel Panels

RD3672A, RD3272A

Handle kits

Contemporary square fine, Contemporary round, Classic, Professional round

FEATURES

- ① Seamless flush fit with 3/16" gaps.
- ② Customise with kitchen cabinetry or a stainless steel door panel accessory
- ③ Select Fisher & Paykel handles or customise handles to match any kitchen style.
- ④ ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature
- ⑤ Flexible storage makes it simple to store, access and remove food.
- ⑥ LED lighting illuminates the interior with a crisp, clean glow for enhanced visibility



OVERVIEW

This roomy refrigerator with bottom freezer seamlessly integrates into the kitchen, fitting flush into the cabinetry.

Pair with our stainless steel door panel accessory (sold separately) for a sleek and modern finish.

External slimline water dispenser and internal ice maker provide filtered ice and water.

PRODUCTS*

RS36A72U1 N

Integrated French Door Refrigerator Freezer with chilled water and ice, 36" wide

RS32A72U1

Integrated French Door Refrigerator Freezer with chilled water and ice, 32" wide

*Some models may not be available in all markets, please check fisherpaykel.com for more information.

OPTIONS

Stainless Steel Panels
RD3672AU, RD3272AU

Handle kits

Contemporary square fine, Contemporary round, Classic, Professional round

FEATURES


- ① Seamless flush fit with 3/16" gaps
- ② Pair with our stainless steel door panels (sold separately) for a sleek modern finish.
- ③ ActiveSmart™ technology helps keep food fresher for longer by constantly maintaining the ideal temperature.
- ④ Flexible storage makes it simple to store, access and remove food.
- ⑤ LED lighting illuminates the interior with a crisp, clean glow for enhanced visibility.
- ⑥ Slimline external water dispenser makes it easy to fill almost any sized jug or vessel.
- ⑦ Internal ice maker means ice is always available in a dedicated freezer bin.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


DESIGN CHOICES

DESIGN PLANNING | **INTEGRATED FRENCH DOOR REFRIGERATOR FREEZER**

INTEGRATED FRENCH DOOR 36"

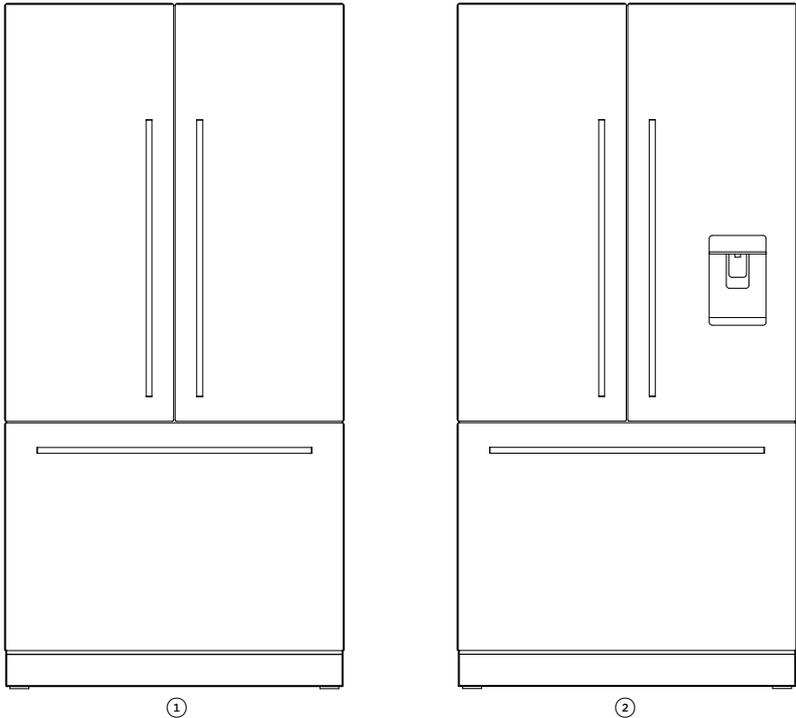

INTEGRATED FRENCH DOOR 32"

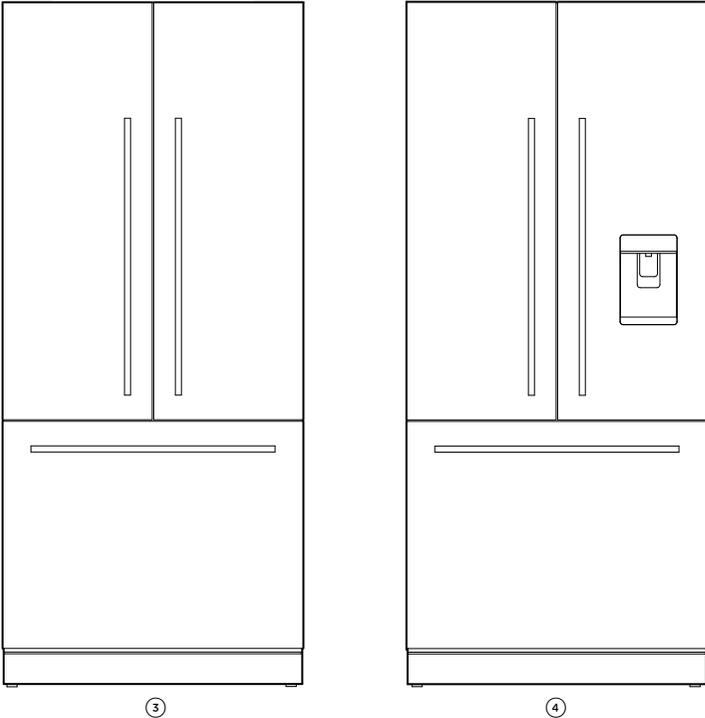


OPTIONS	MODELS
① 36" Refrigerator Freezer Large Capacity Custom or stainless steel panels optional	RS36A72J1 N
② 36" Refrigerator Freezer Large Capacity with Ice and Water Stainless steel panels available	RS36A72U1

OPTIONS	MODELS
③ 32" Refrigerator Freezer Large Capacity Custom or stainless steel panels optional	RS32A72J1
④ 32" Refrigerator Freezer Large Capacity with Ice and Water Stainless steel panels available	RS32A72U1

Handle kits all models - Contemporary Square Fine, Contemporary Round, Classic, Professional Round

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

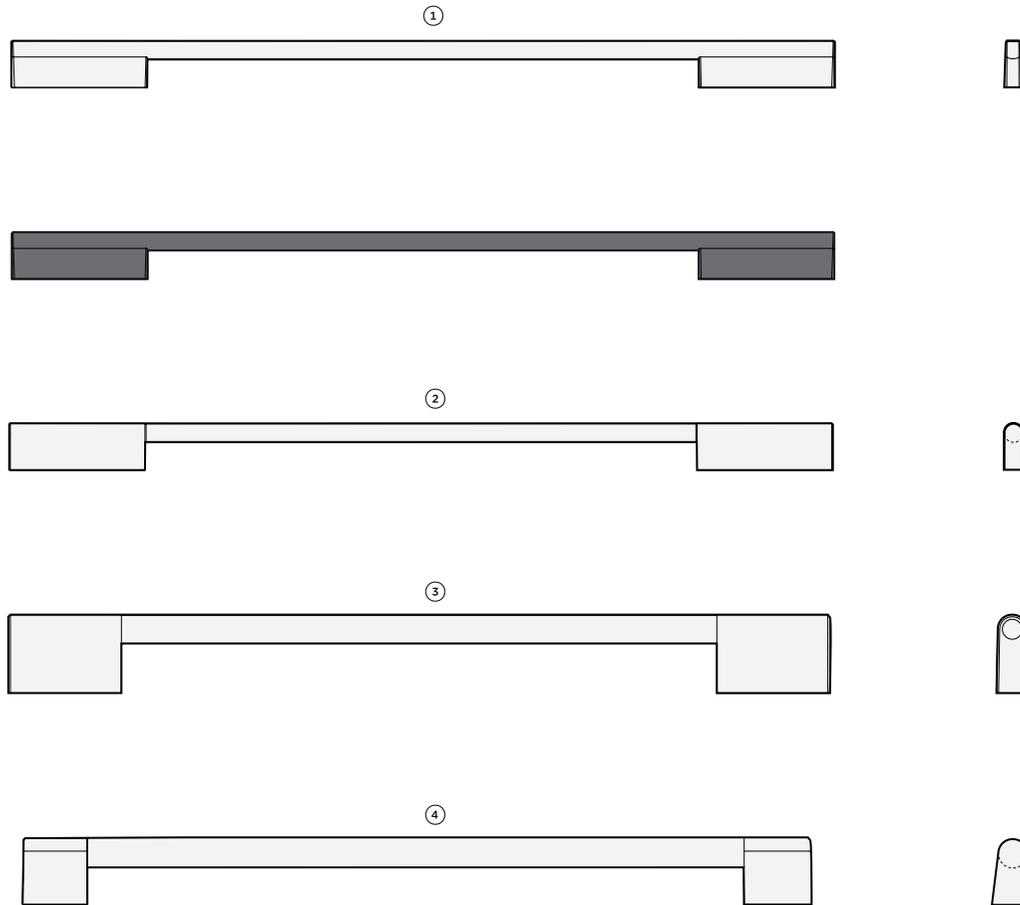


HANDLE KITS
① Contemporary Square Fine
② Contemporary Round
③ Classic Handle
④ Professional Round Flush

FINISH
Aluminium
Black
Aluminium
Stainless Steel
Aluminium


36" REFRIGERATOR FREEZER MODELS
AHD5RD36A
AHD5RD36AB
AHS-ASBI-A
AHCLRD36A
AHP3RD36A

32" REFRIGERATOR FREEZER MODELS
AHD5RD32A
AHD5RD32AB
AHSRS3272A
AHCLRD32A
AHP3RD32A


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

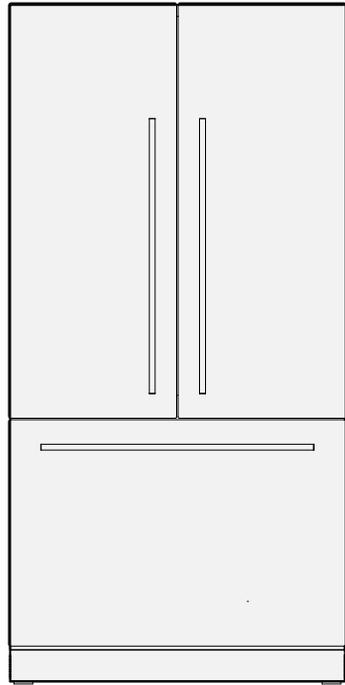


①

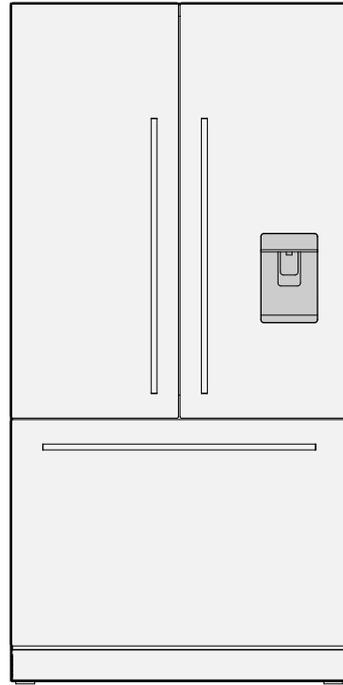

②

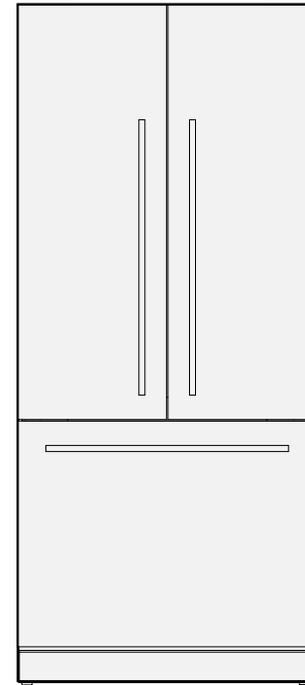

③

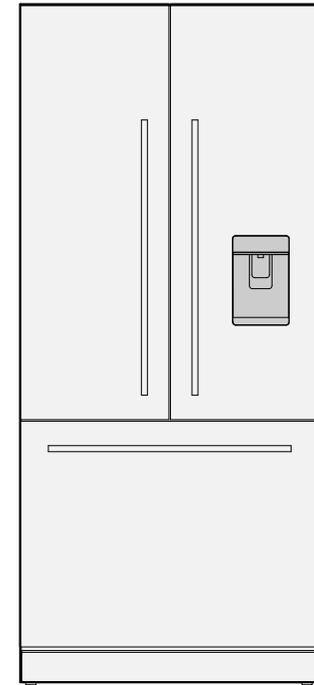

④

REFRIGERATOR FREEZER MODELS

- ① RS36A72J1 N
- ② RS36A72U1 N
- ③ RS32A72J1
- ④ RS32A72U1

FINISH


- Brushed stainless steel
- Brushed stainless steel
- Brushed stainless steel
- Brushed stainless steel

STAINLESS STEEL PANELS

- RD3672A
- RD3672AU
- RD3272A
- RD3272AU

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DATA SHEETS

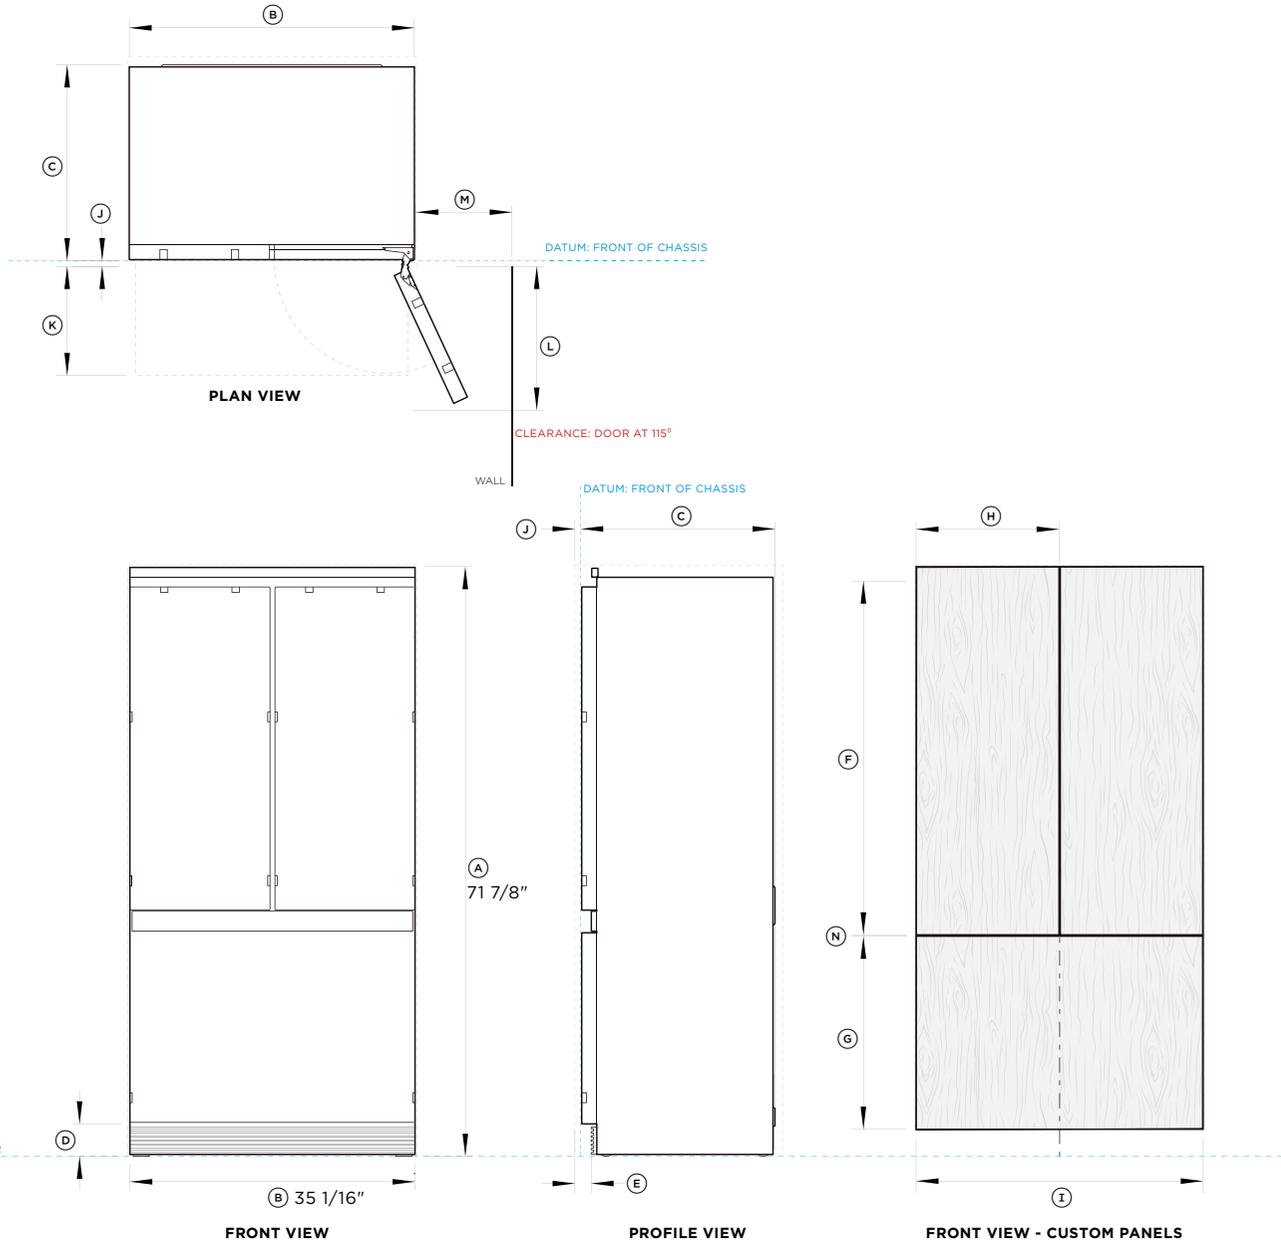

Model no:
RS36A72J1 N Integrated French Door Refrigerator Freezer

Shown with:
 Custom Door Panel*
 Stainless steel door panels optional (RD3672A)

Product Dimensions	in	mm
(A) Overall height of product	71 7/8	1825
(B) Overall width of chassis	35 1/16	890
(C) Depth of product (without handle and door panel)	23 11/16	602
(D) Height of grill	3 15/16	100
(E) Toe kick depth - grill from front of door panels*	1 31/32	50

Custom Door Panel Minimum Dimensions	in	mm
(F) Height of top door panel	44 3/16	1123
(G) Height of bottom drawer panel	23 7/16	596
(H) Width of top door panels	17 3/4	451
(I) Width of bottom drawer panel	35 11/16	906
(J) Depth of fridge front panels (excl. handles)	5/8-3/4	16-19


Door/Drawer Opening Dimensions*	mm	mm
(K) Depth of drawer (open) from front of panel	15 3/4	400
(L) Depth of door (widest opening) from front of panel**	17 1/2	445
(M) Minimum door clearance** to wall (widest opening)**	11 13/16	300
(N) Minimum panel gap clearance	3/16	4


Minimum Clearances	in	mm
Cavity overall height	72	1829
Overall width of cavity	35 3/16 - 35 11/32	894-898
Minimum overall depth of cavity	25	635

* Custom panels to be manufactured & fitted by cabinet maker.
 **Assumes 5/8" door panels on adjacent cabinetry

----- INDICATES CABINETRY / PRODUCT DATUM
 - - - - - INDICATES CABINETRY CLEARANCES
 - · - · - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com



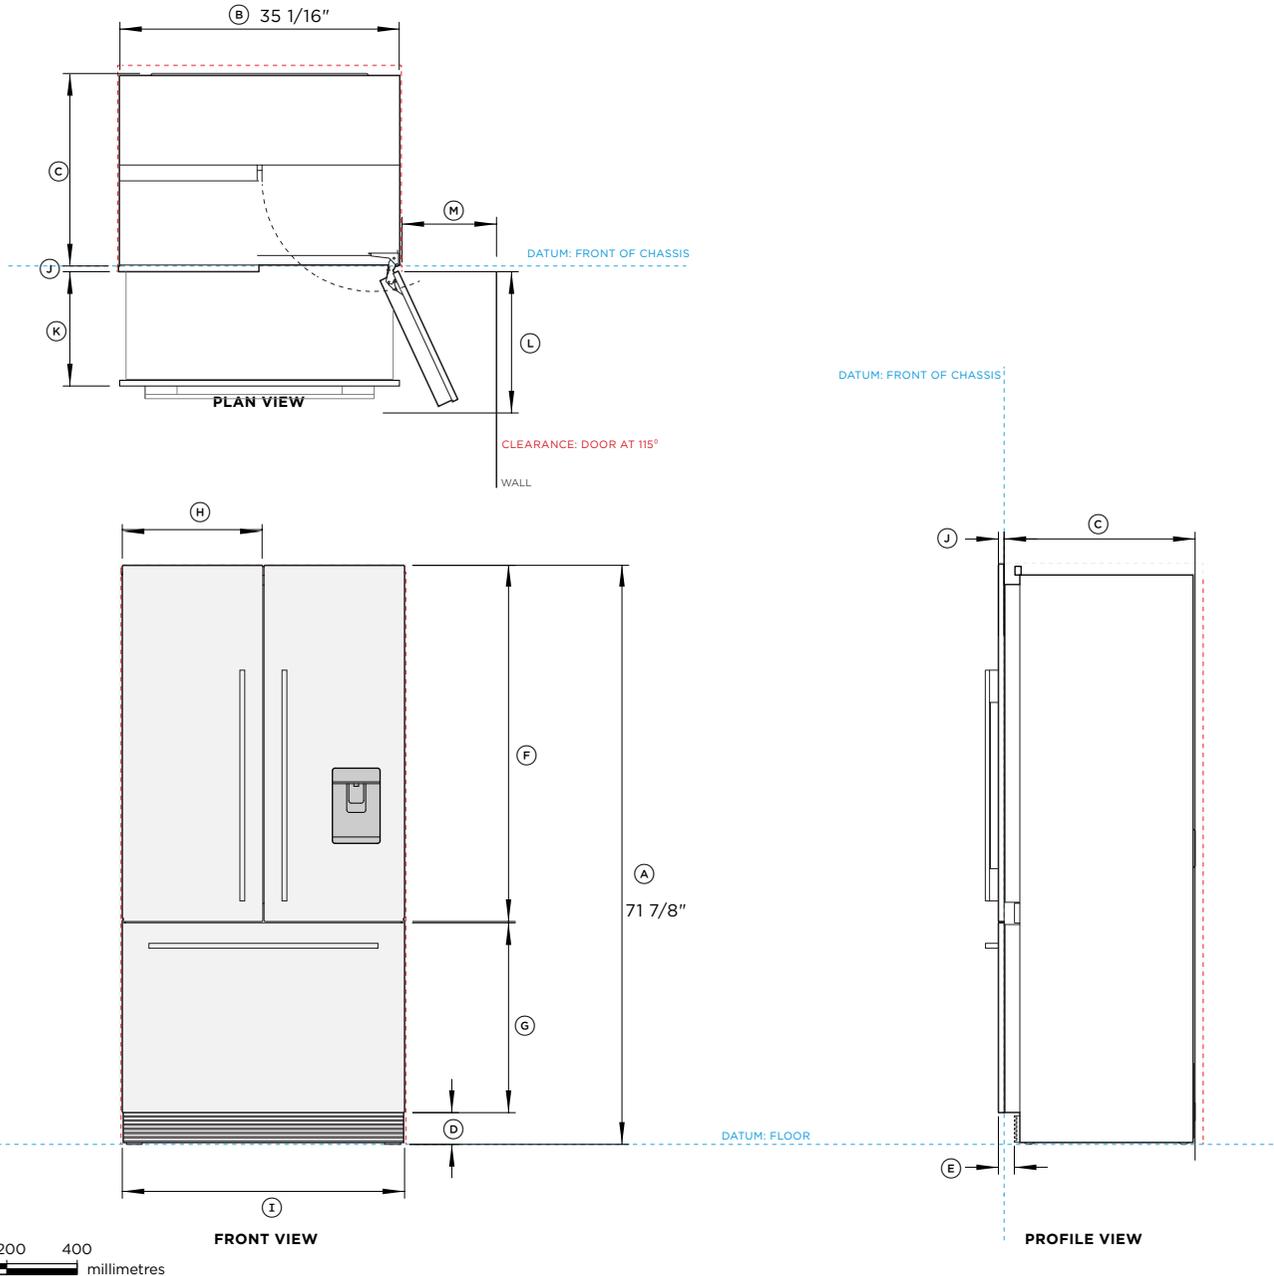

Model no:		
RS36A72U1 N	Integrated French Door Refrigerator Freezer	
Shown with:		
RD3672AU	Stainless steel door panels	

Product Dimensions	in	mm
(A) Overall height of product	71 7/8	1825
(B) Overall width of chassis	35 1/16	890
(C) Depth of chassis (without handle and door panel)	23 11/16	602
(D) Height of grill from floor	3 15/16	100
(E) Toe kick depth - grill to front of door panels*	1 31/32	50
Door Panel Dimensions	mm	
(F) Height of top door panel	44 3/16	1123
(G) Height of bottom drawer panel	23 7/16	596
(H) Width of top door panels	17 3/4	451
(I) Width of bottom drawer panel	35 11/16	906
(J) Depth of fridge front panels (excl. handles)	3/4	19
Door/Drawer Opening Dimensions*	mm	
(K) Depth of drawer (open) from front of panel	15 3/4	400
(L) Depth of door (widest opening) from front of panel	17 1/2	445
(M) Minimum door clearance** to wall (widest opening)	11 13/16	300


Minimum Clearances	in	mm
Cavity overall height	72	1829
Overall width of cavity	35 3/16 - 35 11/32	894-898
Minimum overall depth of cavity	25	635

Custom panels covering water dispenser (internal ice only):
 A custom door panel can be fitted in front of the water dispenser panel. The water dispenser will be automatically disabled.

Custom panels including water dispenser:
 The water dispenser assembly and control panel are included only with the purchase of the stainless steel door panel kit (RD3672AU). Alternatively to use the dispenser with custom door panels, please contact designsupport@fisherpaykel.com for guidance and support.

----- INDICATES CABINETRY / PRODUCT DATUM
 - - - - - INDICATES CABINETRY CLEARANCES
 - · - · - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

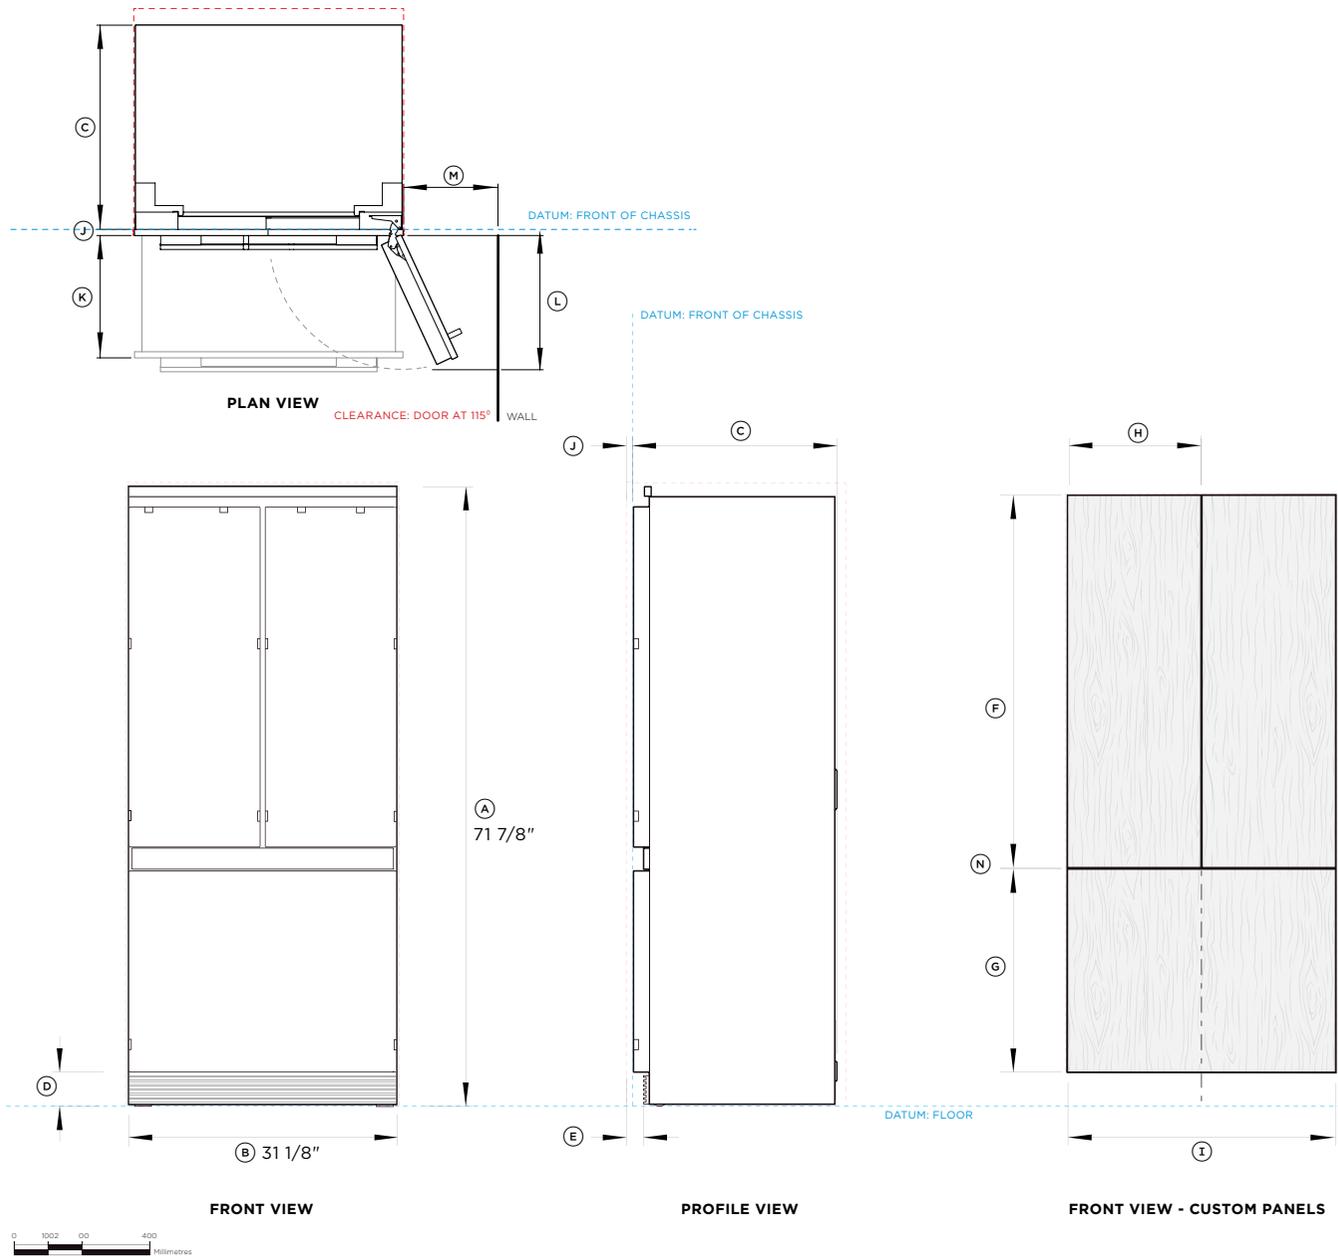

Model no:

RS32A72J1

Integrated French Door Refrigerator Freezer

Shown with:

Custom Door Panel*
 Stainless steel door panels optional (RD3272A)


Product Dimensions	in	mm
Ⓐ Overall height of product	71 7/8	1825
Ⓑ Overall width of chassis	31 1/8	790
Ⓒ Depth of chassis (without handle and door panel)	23 11/16	602
Ⓓ Height of toe kick	3 15/16	100
Ⓔ Depth of toe kick - from front of door panels*	1 31/32	50
Custom Door Panel Minimum Dimensions	mm	
Ⓕ Minimum height of top door panel	44 3/16	1123
Ⓖ Minimum height of bottom drawer panel	23 7/16	596
Ⓗ Width of top door panels	15 3/4	400
Ⓘ Width of bottom drawer panel	31 11/16	805
Ⓙ Depth of fridge front panels (excl. handles)	5/8-3/4	16-19
Door/Drawer Opening Dimensions*	mm	
Ⓚ Depth of drawer (open) from front of panel	15 3/4	395
Ⓛ Depth of door (widest opening) from front of panel**	15 9/16	395
Ⓜ Minimum door clearance** to wall (widest opening)**	11	280
Ⓝ Minimum panel gap clearance	3/16	4

Minimum Clearances	mm	
Cavity overall height	72	1829
Overall width of cavity	31 2/4 - 31 13/32	794-798
Minimum overall depth of cavity	25	635

* Custom panels to be manufactured & fitted by cabinet maker.
 **Assumes 19mm door panels on adjacent cabinetry

----- INDICATES CABINETRY / PRODUCT DATUM
 - - - - - INDICATES CABINETRY CLEARANCES
 - · - · - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

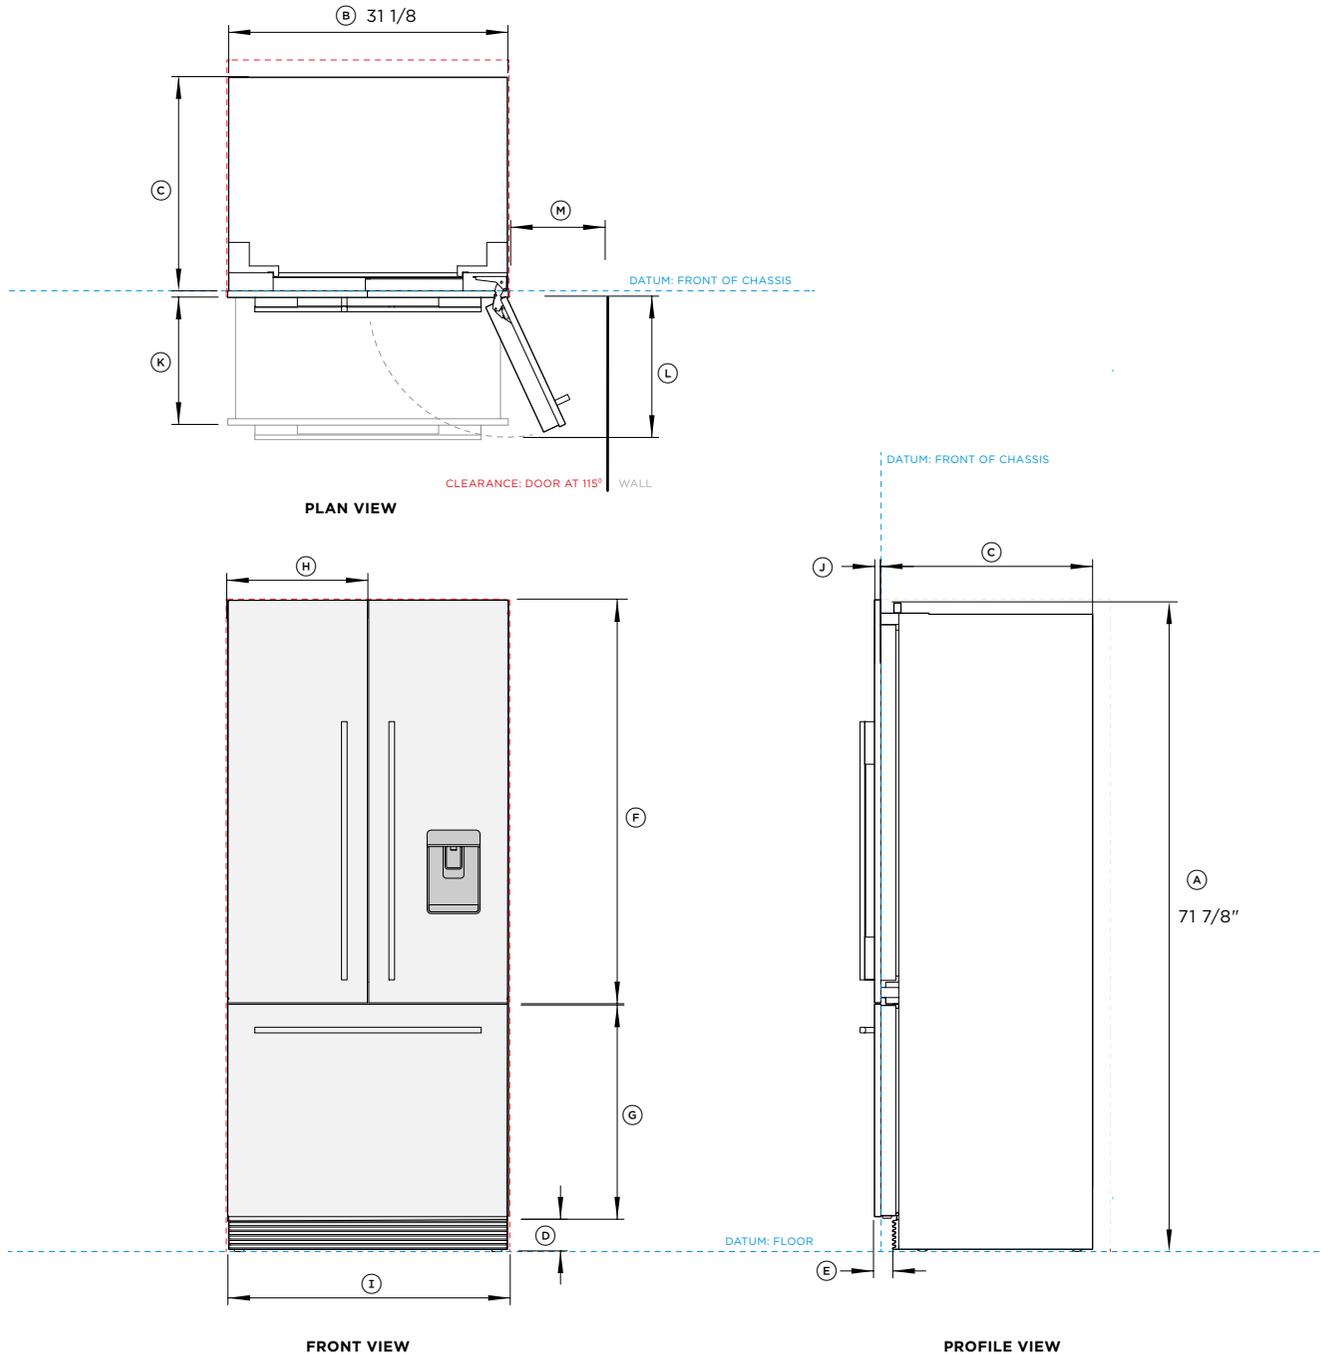

Model no:		
RS32A72U1	Integrated French Door Refrigerator Freezer	
Shown with:		
RD3272AU	Stainless steel door panels	
Product Dimensions		
	in	mm
(A) Overall height of product	71 7/8	1825
(B) Overall width of chassis	31 1/8	790
(C) Depth of chassis (without handle and door panel)	23 11/16	602
(D) Height of toe kick	3 15/16	100
(E) Depth of toe kick - from front of door panels*	1 31/32	50
Door Panel Dimensions		
	mm	mm
(F) Height of top door panel	44 3/16	1123
(G) Height of bottom drawer panel	23 7/16	596
(H) Width of top door panels	15 3/4	400
(I) Width of bottom drawer panel	31 11/16	805
(J) Depth of fridge front panels (excl. handles)	3/4	19
Door/Drawer Opening Dimensions*		
	mm	mm
(K) Depth of drawer (open) from front of panel	15 3/4	400
(L) Depth of door (widest opening) from front of panel	15 9/16	395
(M) Minimum door clearance** to wall (widest opening)	11	280
Minimum Clearances		
	in	mm
Minimum panel gap clearance	5/32	4
Cavity overall height	72	1829
Overall width of cavity	31 2/4	794-798
	- 31 13/32	
Minimum overall depth of cavity	25	635
Custom panels covering water dispenser (internal ice only):		
A custom door panel can be fitted in front of the water dispenser panel. The water dispenser will be automatically disabled.		
Custom panels including water dispenser:		
The water dispenser assembly and control panel are included only with the purchase of the stainless steel door panel kit (RD3272AU). Alternatively to use the dispenser with custom door panels, please contact designsupport@fisherpaykel.com for guidance and support.		
----- INDICATES CABINETRY / PRODUCT DATUM		
- - - - - INDICATES CABINETRY CLEARANCES		
- · - · - INDICATES CUTOUT		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com		


PLANNING CONSIDERATIONS

CAVITY SPECIFICATIONS


Dimensions	in	mm
(A) Cavity height*	72	1829
(B) RS36A72 Overall cavity width RS32A72 Overall cavity width	35 3/16 - 35 11/32 31 2/4 - 31 13/32	894-898 794-798
(C) Minimum internal depth**	25	635
(D) Toe kick height	3 15/16	100
(E) Product height	71 7/8	1825
(F) Chassis width	31 1/8	790
(G) Chassis depth (excluding panels)	23 11/16	602
(H) Minimum gap from edge of door panel to cabinetry	5/32	4
(I) Minimum required finished return	4 23/32	120

*The minimum cabinet gap above door panels is 5/32"

**Water and electrical connections must not protrude from the wall if located behind the refrigerator.

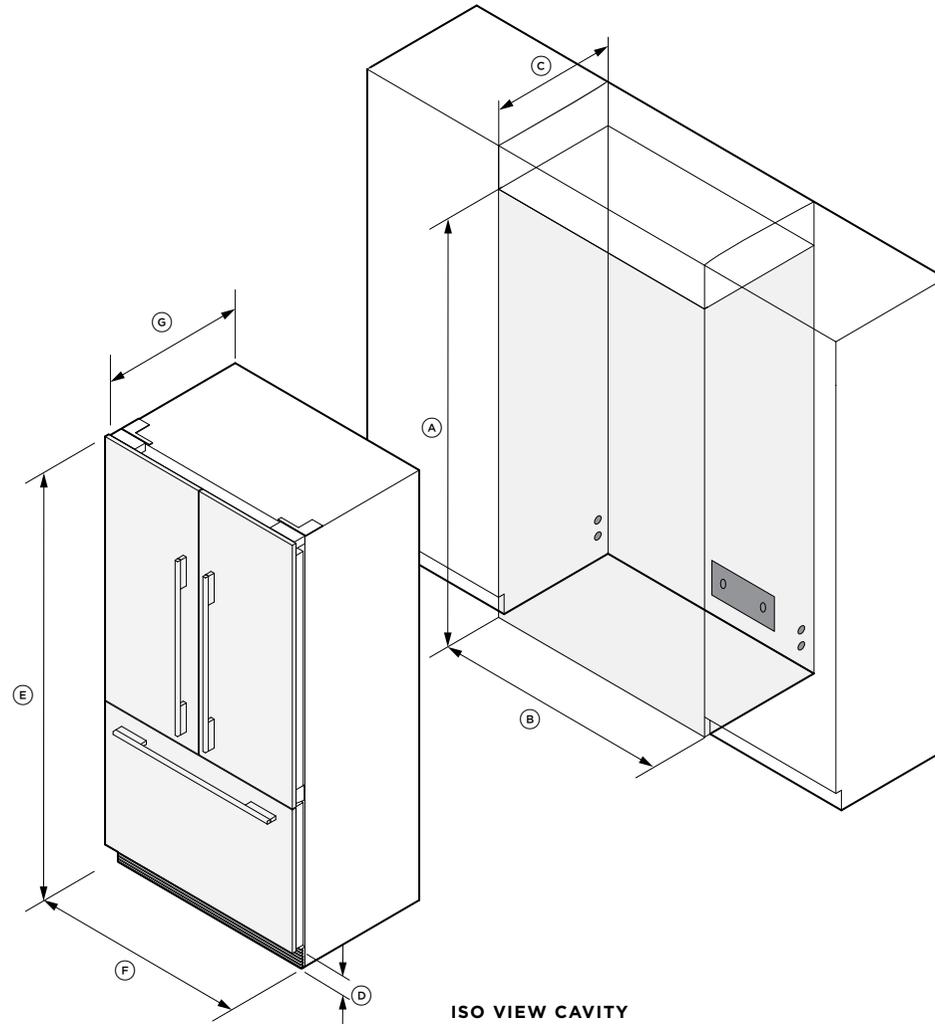


ISO VIEW CAVITY



UNFRAMED CABINETRY

Ensure cabinetry extends minimum 4 23/32".



FRAMED CABINETRY

Ensure that there is a finished return of minimum 4 23/32" added to the cavity.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SERVICE SPECIFICATIONS


Electrical connection should be located in an adjacent cabinet to either side, or above the refrigerator cavity.

An isolating switch for electricity and water that is easily accessible to the user after the appliance is installed is required.


Cavity Dimensions		in	mm
Ⓐ	Height of supply area	4 5/16	110
Ⓑ	Width of supply area	2 15/16	75
Ⓒ	Supply area - distance from left side of cavity	5 1/6	129
Ⓓ	Supply area - distance from floor	4 5/16	110

If water or power connections are in this location the water tap must to be recessed into the wall. The recess must allow for an 80mm bend radius for the water hose.

An isolating switch for electricity and water that is easily accessible to the user after the appliance is installed is required.

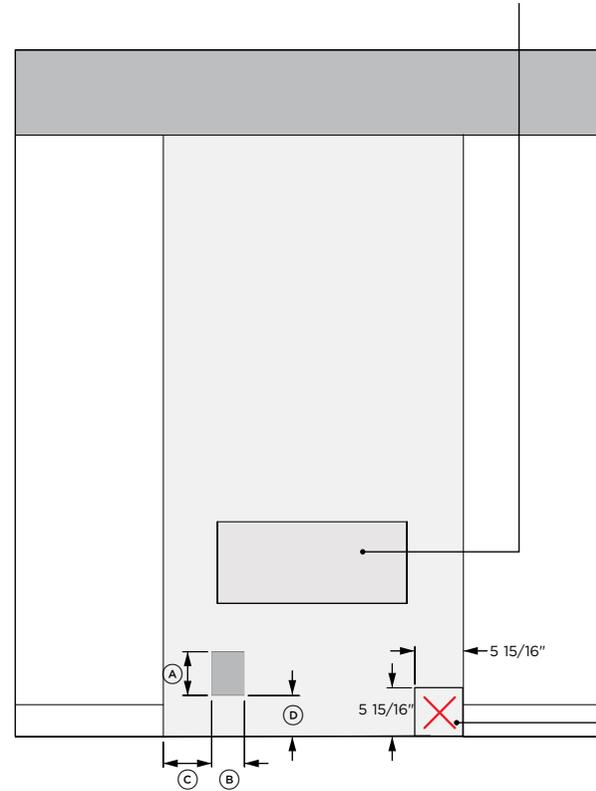






FRONT VIEW - CAVITY SUPPLY POSITION

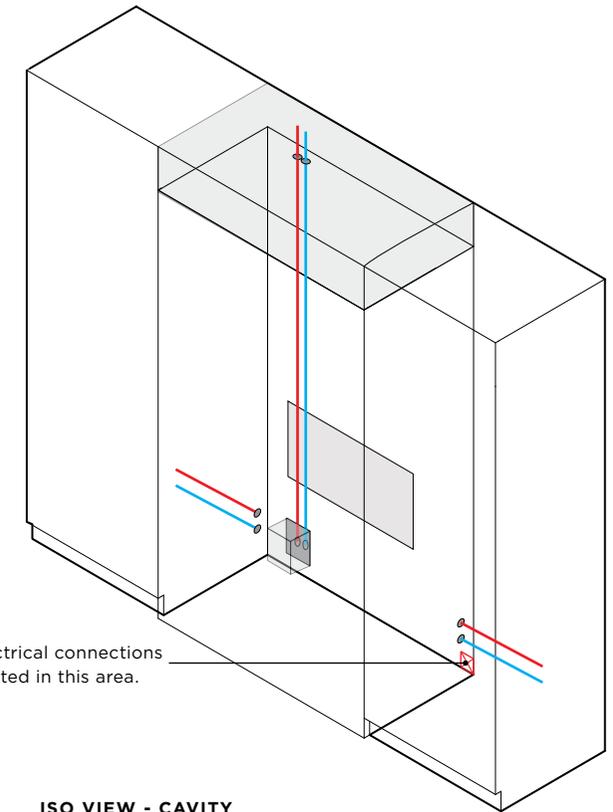

Water and electrical connections cannot be located in this area.

ISO VIEW - CAVITY HOSE & ELECTRICAL ROUTING OPTIONS

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

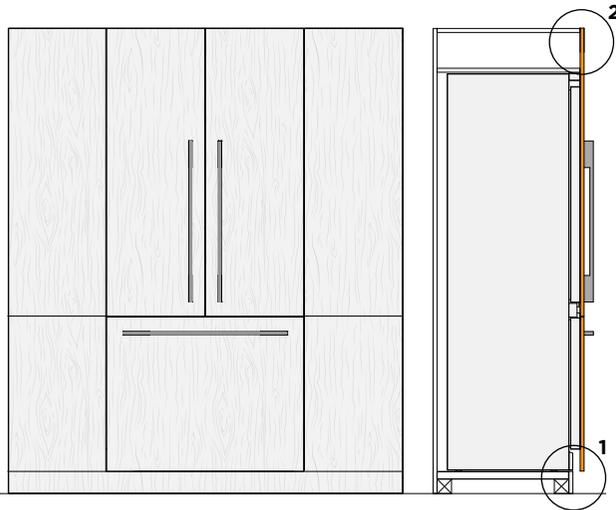

DETAIL VIEW 1

DETAIL VIEW 2

DETAIL VIEW 3

DETAIL VIEW 4

INSTALL WITH PLINTH AND EXTENDED PANELS

The drawer panel can extend downward to hide the airflow grill. Door panels can be extended upwards to align with the surrounding cabinets.

Dimensions	in	mm
Ⓐ Airflow gap	2	51
Ⓑ Minimum lower panel extension to cover grill	3 21/32	93
Ⓒ Maximum upper panel extension	7 7/8	200

PLINTH AND INCREASED TOE KICK DEPTH

The plinth can be set back to allow a deeper toe kick. The door panels can extend to cover the cavity top.

Dimensions	in	mm
Ⓓ Center of front wheels to front of door panel	5 11/32	136
Ⓔ Maximum toe kick depth	3 15/16	100

EXTENDED DRAWER PANEL TO FLOOR

The drawer panel can be extended down to the minimum distance from the floor (50mm) for a lower toe kick.

Dimensions	in	mm
Ⓕ Minimum distance panel to floor	2	51

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PANEL DETAILS

Custom panels require a minimum radius of 1/16" on panel edges to prevent clashing with adjacent cabinetry.

Panels thicker than 3/4" require a larger gap between adjacent cabinetry and a larger radius to prevent clashing.


Custom Panel Dimensions	in	mm
Ⓐ Front panel thickness	5/8-3/4	16-19
Ⓑ Gap between custom panel and adjacent panels	5/32	4

Custom Panel Maximum Weight

RS36A72 Each door panel	22 lb	Max 10kg
RS36A72 Drawer panel	21 lb	Max 9.5kg
RS32A72 Each door panel	22 lb	Max 10kg
RS32A72 Drawer panel	21 lb	Max 9.5kg

Weights includes handle.

Left-hand hinge models are a mirror of version shown.




Adjacent cabinetry panels require a minimum 1/16" radius

DETAIL 1

Custom Panel Edge Radius

Panel Thickness	① Gap to adjacent panel	② Radius
5/8-3/4" (16-19mm)	5/32" (4mm)	1/16" (2mm) Radius
5/8-3/4" (16-19mm)	*3/16" (5mm)	1/32" (1mm) Radius
5/8-3/4" (16-19mm)	*7/32" (5.5mm)	0" (0mm) Radius


*The side of the refrigerator may be visible if gaps are over 5/32" (4mm).

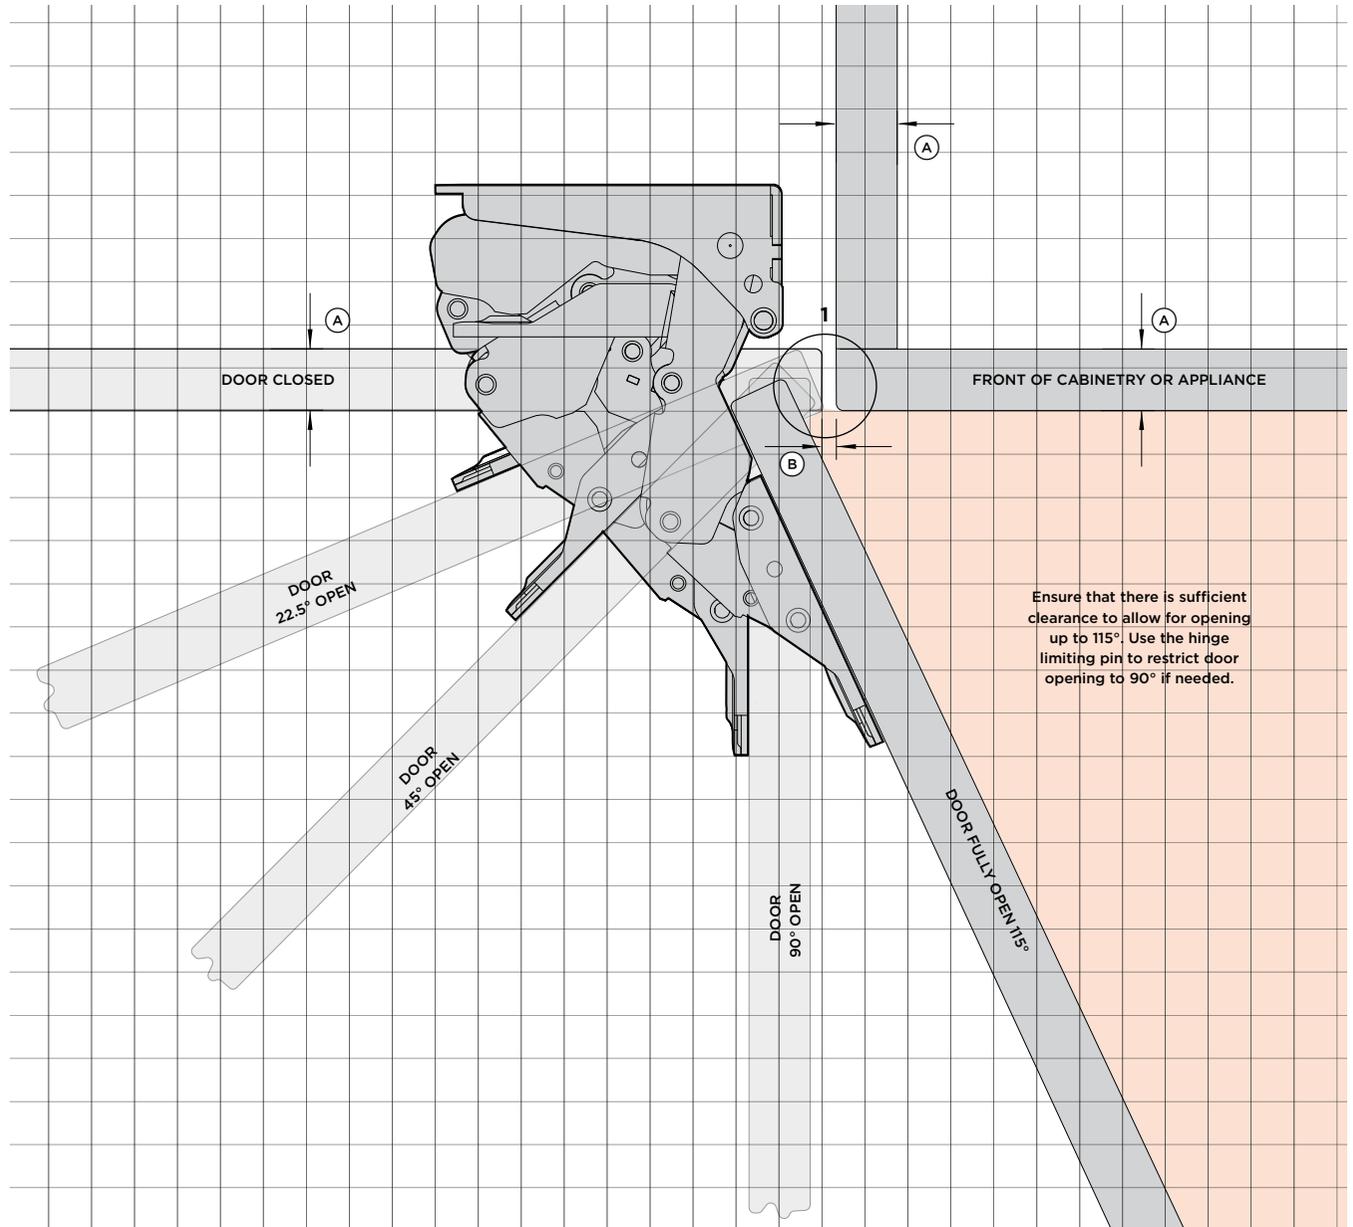


1 SQUARE = 1/2"

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

DESIGN PLANNING | DOOR OPENING CLEARANCE

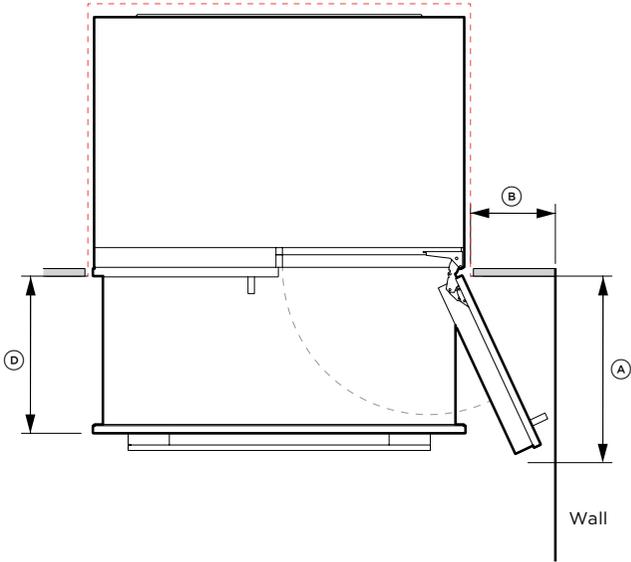

FULL INTERNAL ACCESS 115°

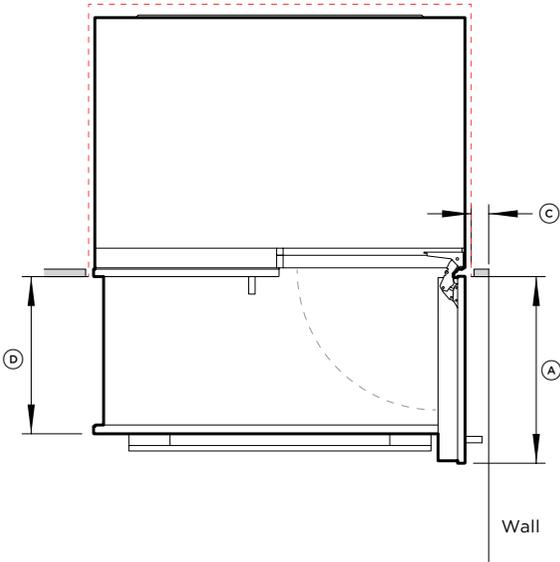

REDUCED INTERNAL ACCESS 90°

Hinge limiting pins restrict the door opening to 90°.

MINIMUM DOOR CLEARANCES	36" MODELS		32" MODELS	
	in	mm	in	mm
Ⓐ Door swing depth	min 17 1/2	min 445	min 15 9/16	min 395
Ⓑ Clearance for handle (at 115°)*	11 13/16	min 300	11 13/16	min 280
Ⓒ Clearance for handle (at 90°)*	3 15/16	min 100	3 15/16	min 100
Ⓓ Drawer open depth	14 13/16	min 360	14 13/16	min 360

* Limiting pins are required for a 90° door swing. Dimensions assume a panel depth of 19mm (3/4"). Thicker panels will require a wider gap between panels.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

CUSTOM DOOR PANEL PREPARATION

DESIGN PLANNING | RS32A72J1 MODELS

Models

RS32A72J1 Integrated French Door Refrigerator Freezer

Custom Panel Dimensions*		in	mm
Ⓐ	Height of door panels	44 3/16	1123
Ⓑ	Width of door panels	15 3/4	400
Ⓒ	Height of drawer panel (do not extend more than 50mm from floor)	23 7/16	596
Ⓓ	Width of drawer single panel	796	805
	Panel thickness	5/8-3/4	16-19
Clearance Dimensions*		in	mm
	Minimum cabinetry gap clearance from edge of door panel	5/32	4

* Custom panels to be manufactured & fitted by cabinet maker.

Dimensions apply for the preparation and installation of Custom door panels.

Dwg and Dxf files of the panel preparation can be downloaded from www.fisherpaykel.com

The thickness of the custom door panel can vary provided that the screws do not penetrate beyond the full depth of the door panel.

RS32A72U1


Custom panels covering water dispenser (internal ice only):

A custom door panel can be fitted in front of the water dispenser panel. The water dispenser will be automatically disabled.

Custom panels including water dispenser:

The water dispenser assembly and control panel are included only with the purchase of the stainless steel door panel kit (RD3272AU). Alternatively to use the dispenser with custom door panels, please contact designsupport@fisherpaykel.com for guidance and support.

CUSTOM PANEL

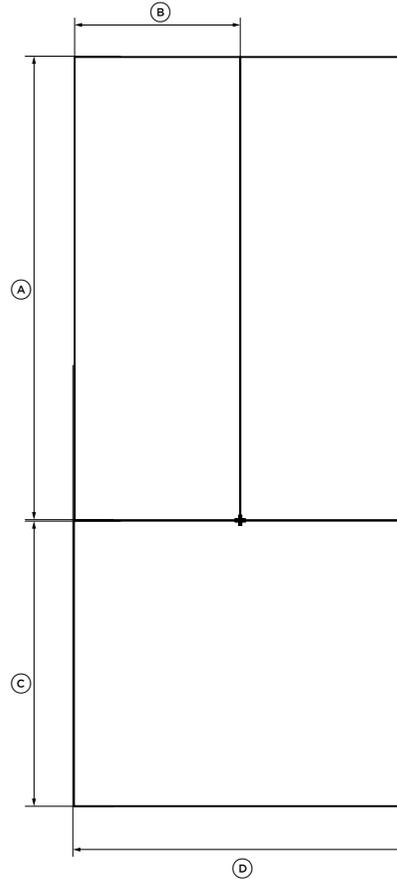


PILOT HOLES

8x Pilot holes recommended for bracket attachment. (Do not penetrate front surface).

Do not place pilot holes for handle attachment in marked areas to avoid clashing with panel attachment brackets.

MOUNTING HOLES

Dimensions given in inches, do not fix handles through mounting holes.

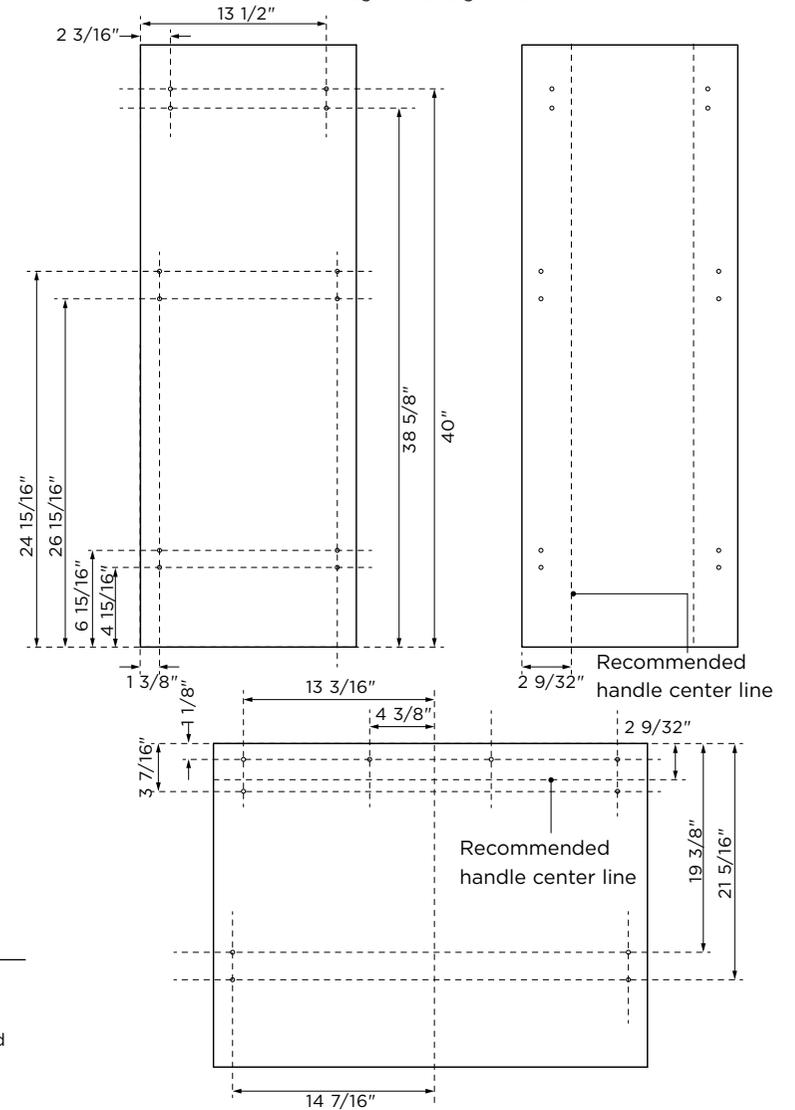

DESIGN PLANNING | RS36A72J1 N MODELS

Models

RS36A72J1 N Integrated French Door Refrigerator Freezer

Custom Panel Dimensions*		
	in	mm
Ⓐ Height of door panels	44 3/16	1123
Ⓑ Width of door panels	17 3/4	451
Ⓒ Height of drawer panel (do not extend more than 50mm from floor)	23 7/16	596
Ⓓ Width of drawer panel	35 11/16	906
Panel thickness	5/8-3/4	16-19
Clearance Dimensions*		
	in	mm
Minimum cabinetry gap clearance from edge of door panel	5/32	4

* Custom panels to be manufactured & fitted by cabinet maker.

Dimensions apply for the preparation and installation of Custom door panels.

Dwg and Dxf files of the panel preparation can be downloaded from www.fisherpaykel.com

The thickness of the custom door panel can vary provided that the screws do not penetrate beyond the full depth of the door panel.

RS36A72U1 NS


Custom panels covering water dispenser (internal ice only):

A custom door panel can be fitted in front of the water dispenser panel. The water dispenser will be automatically disabled.

Custom panels including water dispenser:

The water dispenser assembly and control panel are included only with the purchase of the stainless steel door panel kit (RD3672AU). Alternatively to use the dispenser with custom door panels, please contact designsupport@fisherpaykel.com for guidance and support.

CUSTOM PANEL

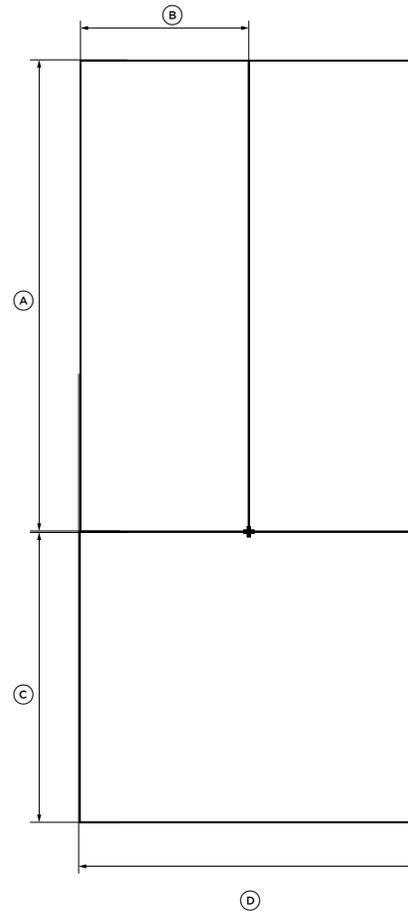

PILOT HOLES


8x Pilot holes recommended for bracket attachment.

(Do not penetrate front surface).

Do not place pilot holes for handle attachment in marked areas to avoid clashing with panel attachment brackets.

MOUNTING HOLES


Dimensions given in inches, do not fix handles through mounting holes.

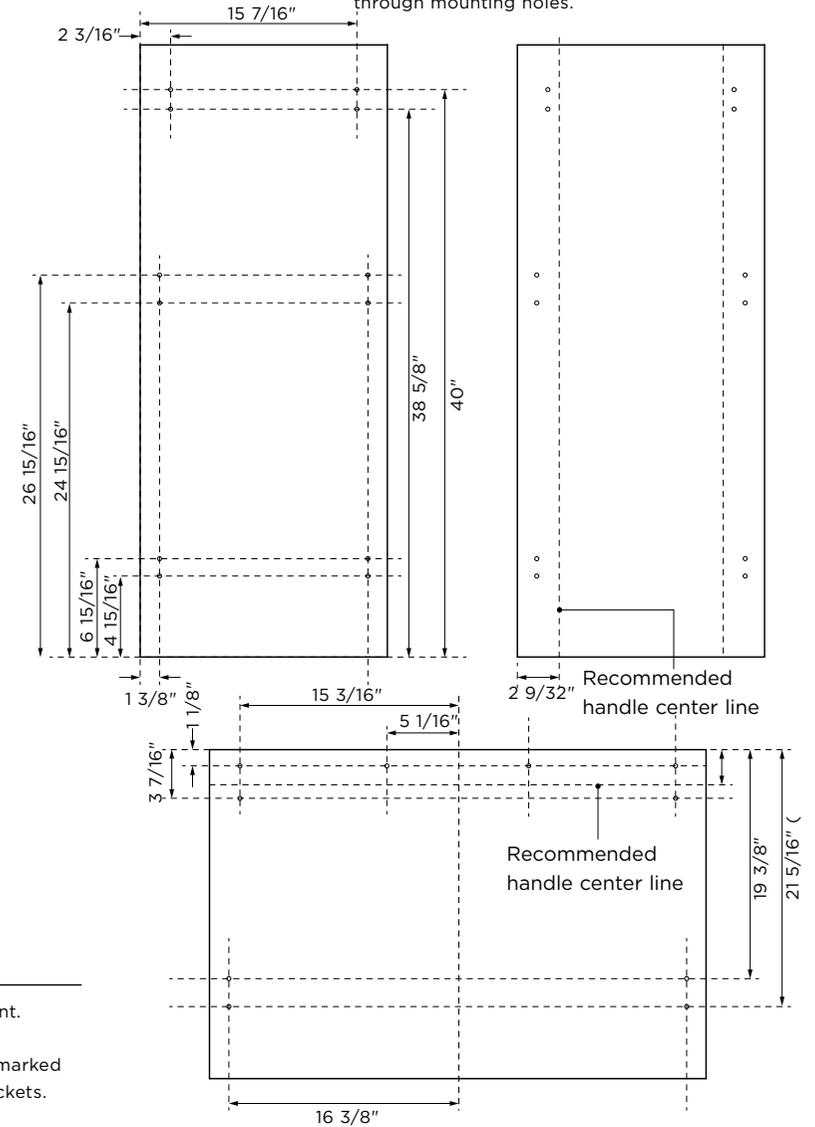

SERVICES

Electrical / Plumbing Specifications	
RS36A72J1 N	Integrated French Door Refrigerator Freezer
Specifications	mm
Electrical	
Supply	115 V, 60 Hz
Service	10 A circuit

Connections may be located in an adjacent cabinet to either side of the fridge or above the fridge cavity.

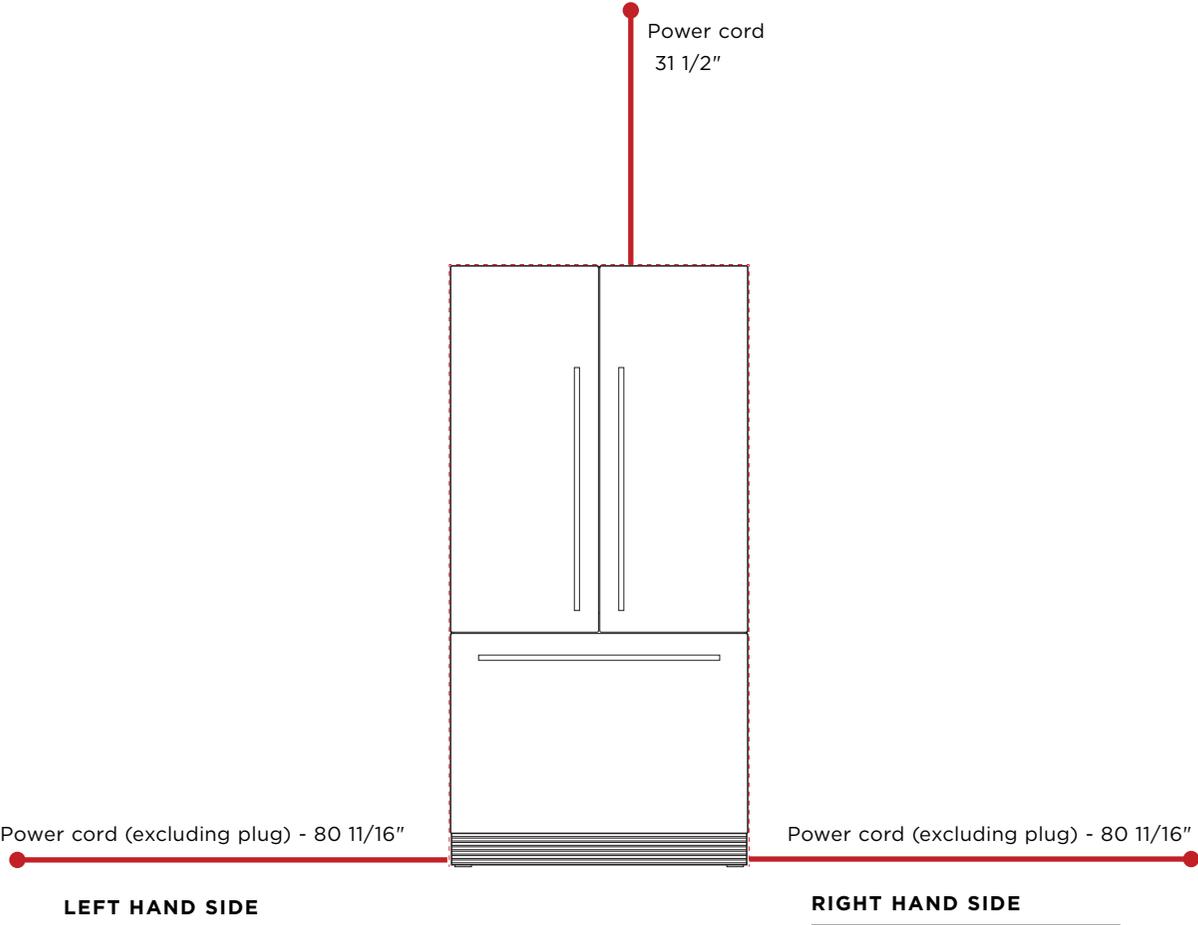


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Electrical / Plumbing Specifications	
RS36A72U1 N	Integrated French Door Refrigerator Freezer
Specifications	mm
Electrical	
Supply	115 V, 60 Hz
Service	10 A circuit
Plumbing	
Water Supply	US/CA 1/4" (6mm) comp. Stainless steel braided hose
Pressure	min 22 psi (150 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

* Water inlet hose dimensions apply to ice and water models only.


Connections may be located in an adjacent cabinet to either side of the fridge or above the fridge cavity.

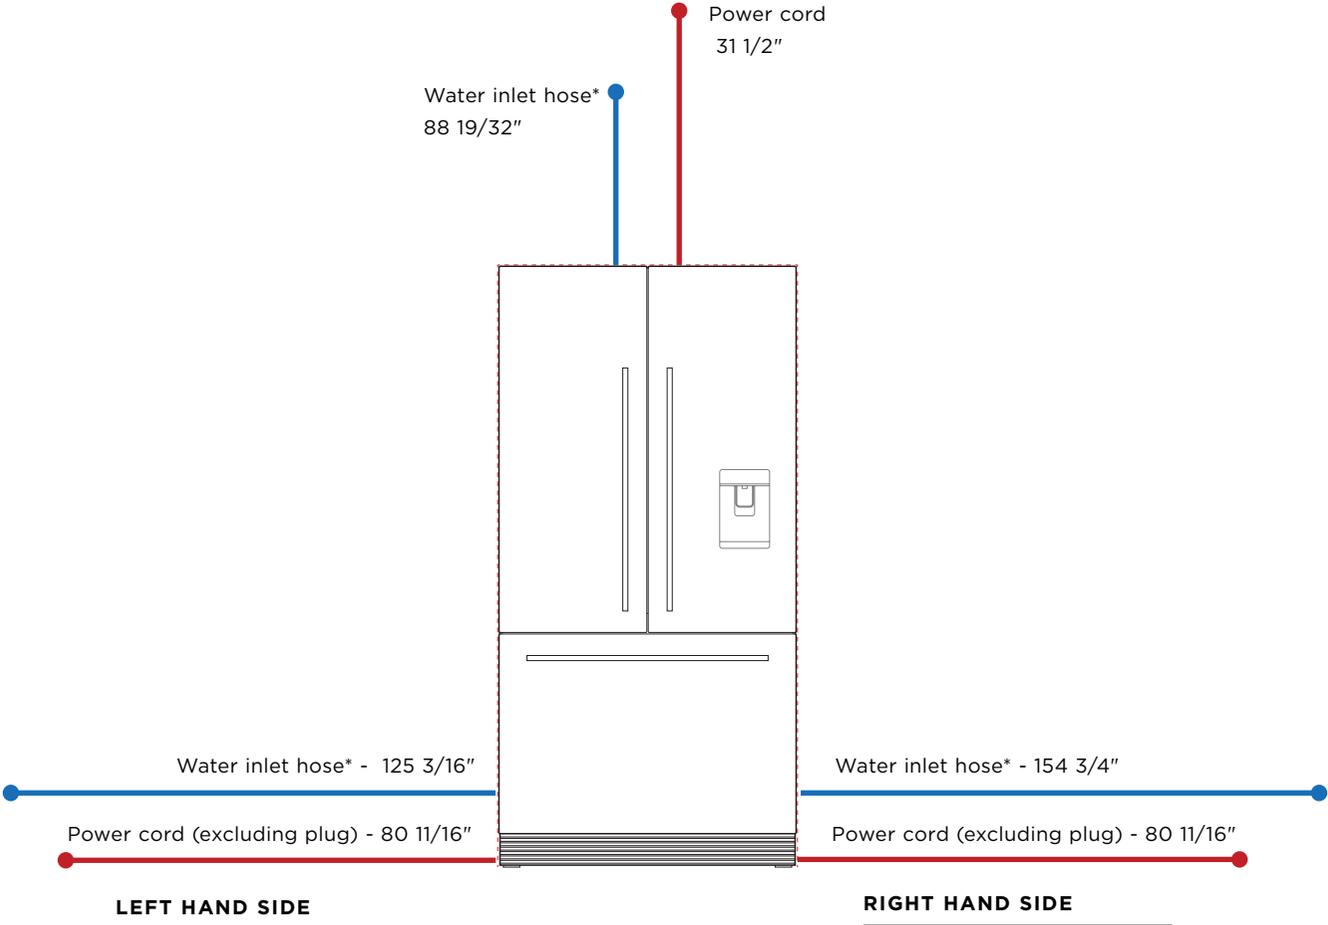

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Electrical / Plumbing Specifications	
RS32A72J1	Integrated French Door Refrigerator Freezer
Specifications	mm
Electrical	
Supply	115 V, 60 Hz
Service	10 A circuit

Connections may be located in an adjacent cabinet to either side of the fridge or above the fridge cavity.

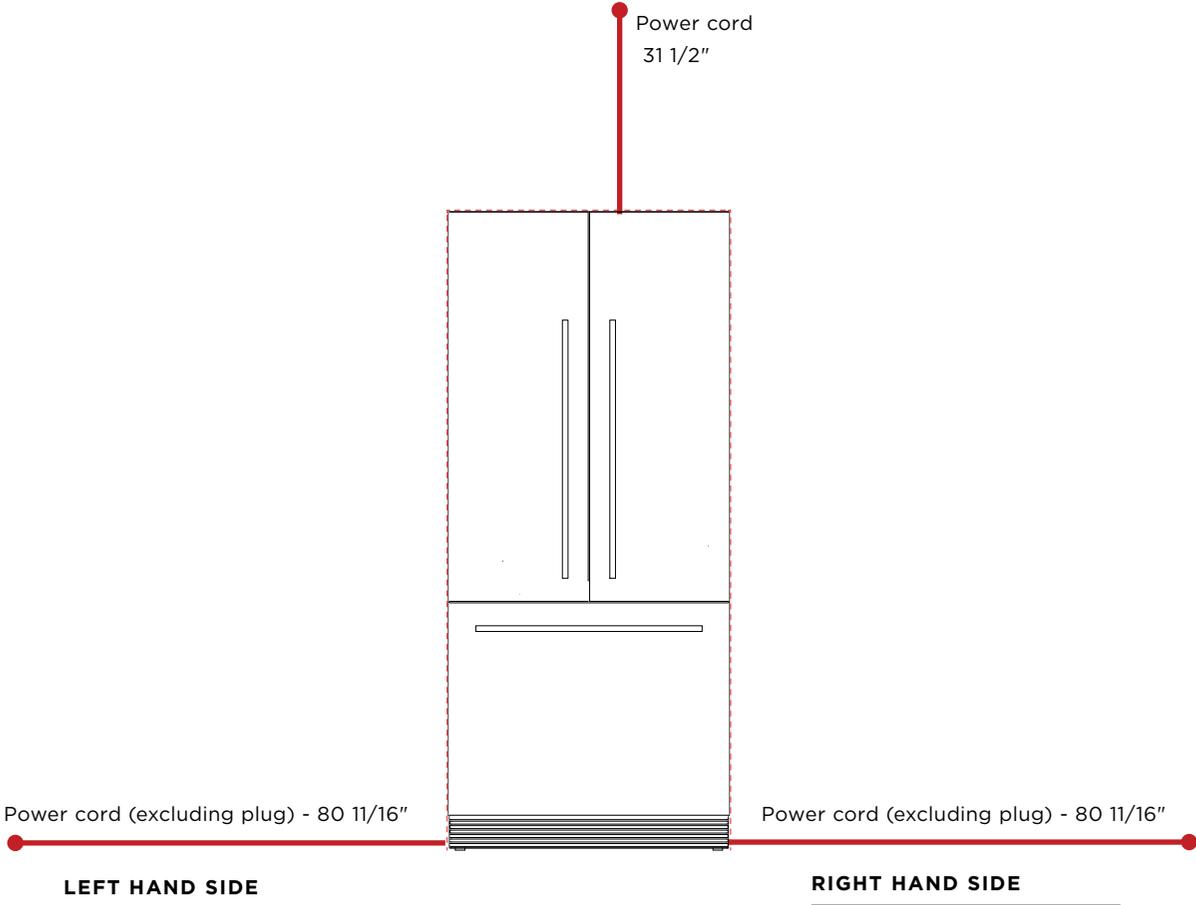


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Electrical / Plumbing Specifications	
RS32A72U1	Integrated French Door Refrigerator Freezer
Specifications	mm
Electrical	
Supply	115 V, 60 Hz
Service	10 A circuit
Plumbing	
Water Supply	US/CA 1/4" (6mm) comp. Stainless steel braided hose
Pressure	min 22 psi (150 kPa) max 120 psi (827 kPa) @ 68°F (20°C)


* Water inlet hose dimensions apply to ice and water models only.

Connections may be located in an adjacent cabinet to either side of the fridge or above the fridge cavity.

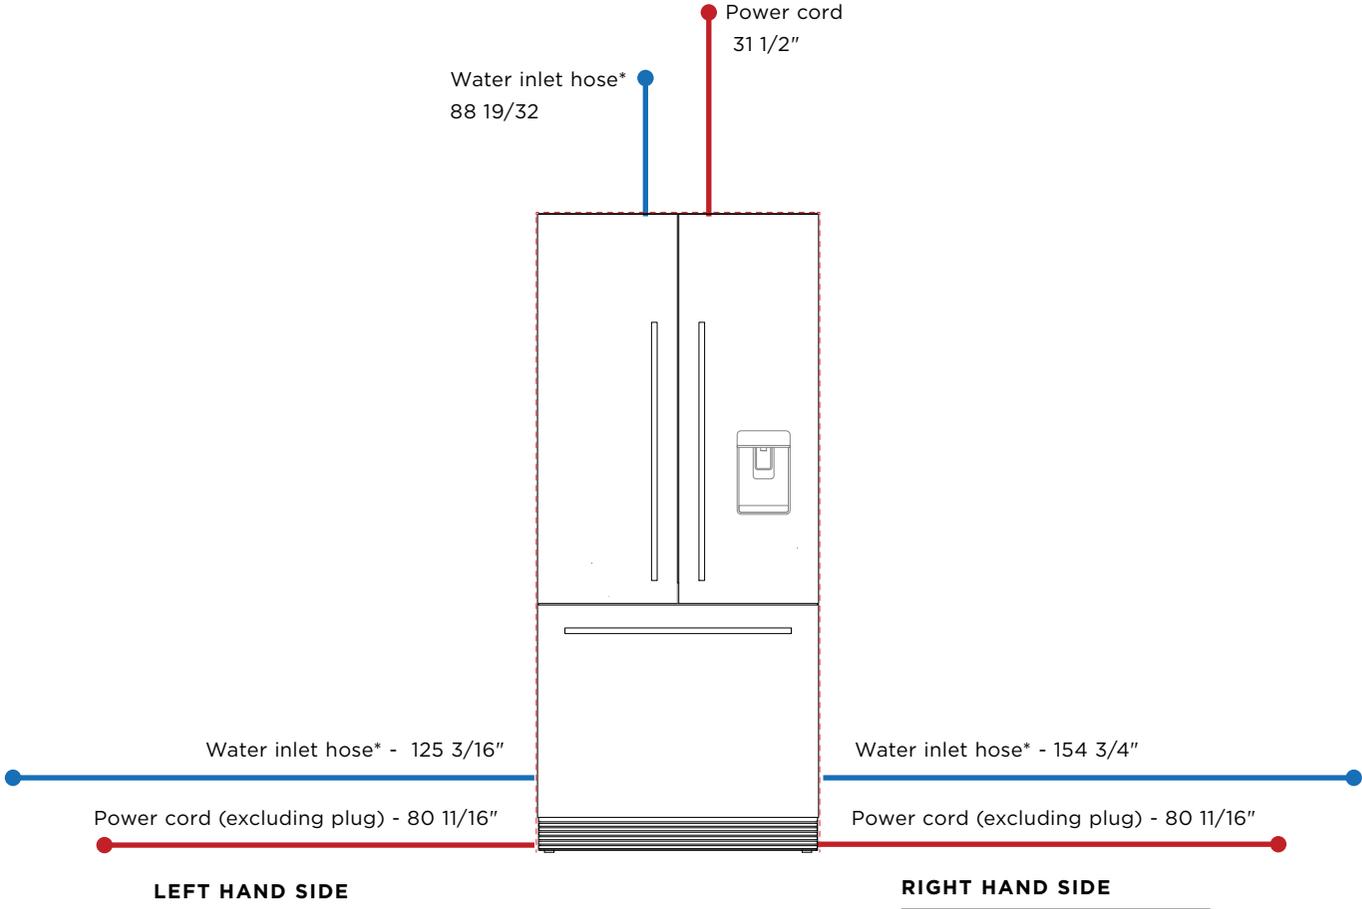

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

HANDLES - DATA SHEETS

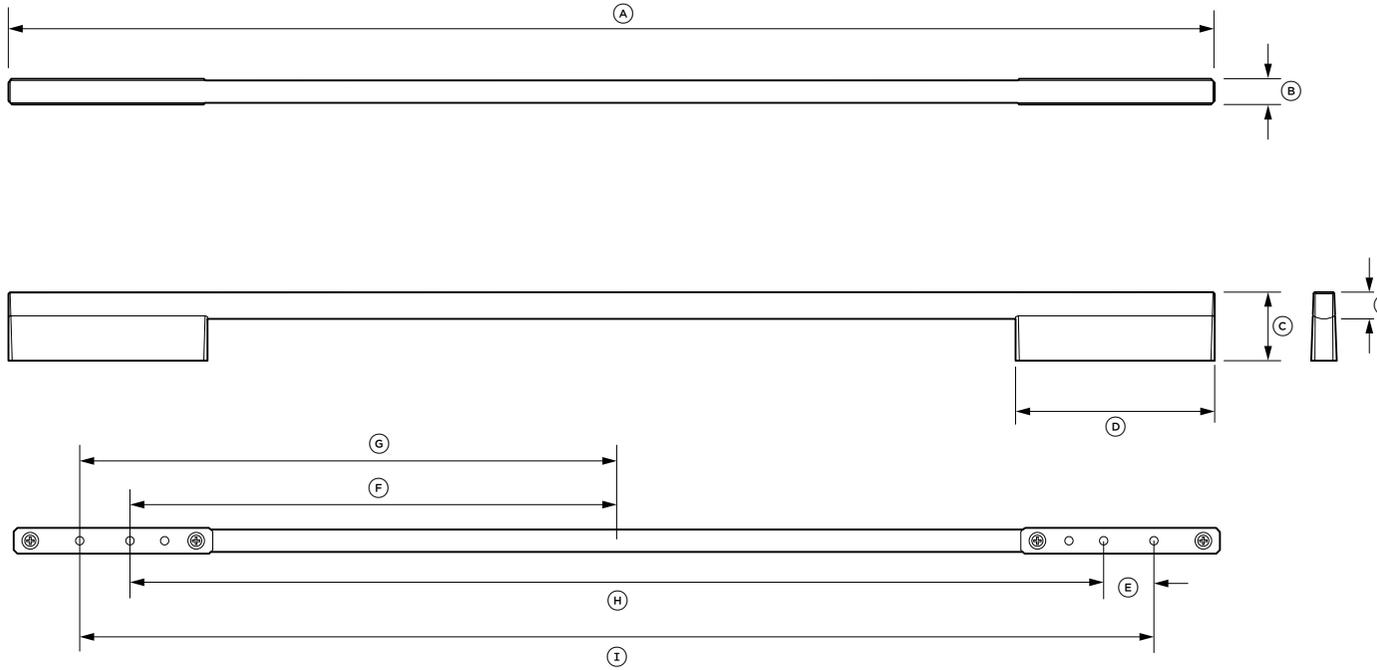

Model no:

Square Fine Handle Aluminium- AHD5RD36A
Black Square Fine Handle - AHD5RD36AB

For models


RS36 Handle kits contain 2 door and 1 drawer handle.

Handle Dimensions	in	mm
Ⓐ Overall length of handle	28 5/8	727
Ⓑ Overall depth of handle	19/32	15
Ⓒ Overall height of handle	1 5/8	41
Ⓓ Length of off-stand	4 23/32	120
Ⓔ Distance between attachment holes	1 3/16	30
Ⓕ Distance from centreline to inner attachment holes	11 17/32	293
Ⓖ Distance from centreline to outer attachment holes	12 3/4	324
Ⓗ Distance between inner attachment holes	23 1/8	587
Ⓘ Distance between outer attachment holes	25 15/32	647
⓵ Thickness of handle rail	5/8	16

Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

- INDICATES CABINERY / PRODUCT DATUM
- INDICATES CABINERY CLEARANCES
- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

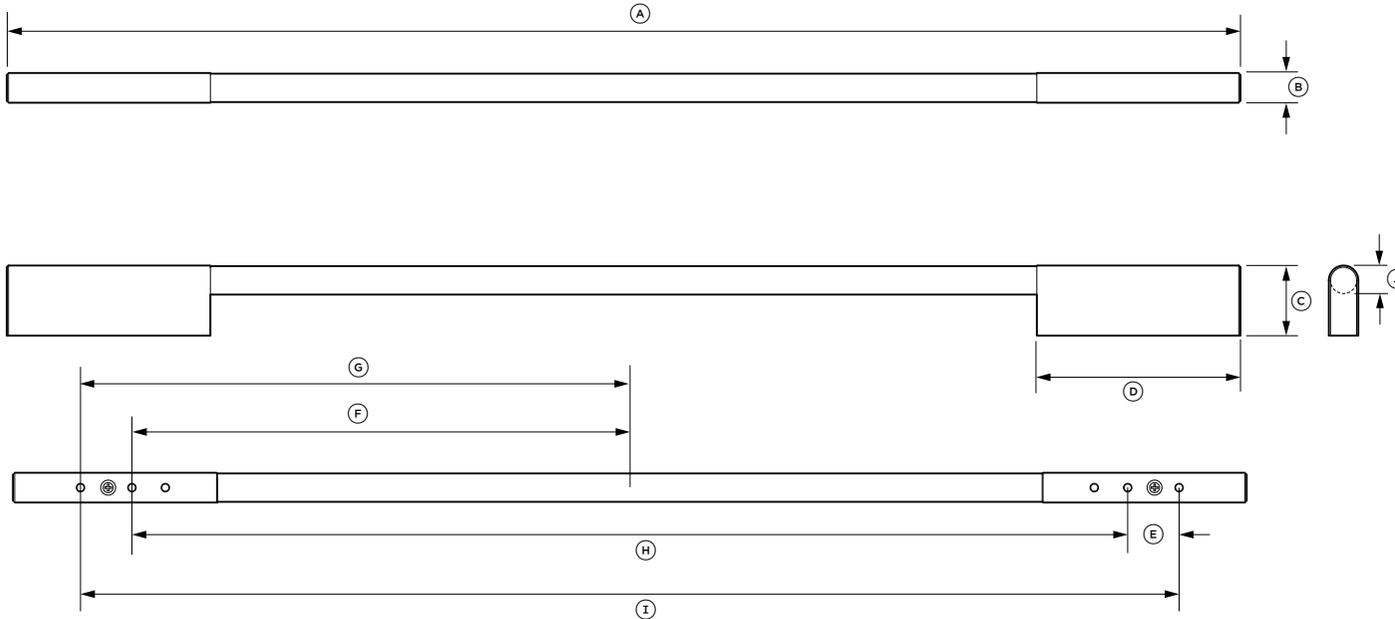

Model no:

AHS-ASBI-A

For models

RS36

Handle kits contain 2 door and 1 drawer handle.

Handle Dimensions

	in	mm
Ⓐ Overall length of handle	28 5/8	727
Ⓑ Overall depth of handle	2/3	17
Ⓒ Overall height of handle	1 5/8	41
Ⓓ Length of off-stand	4 23/32	120
Ⓔ Distance between attachment holes	1 3/16	30
Ⓕ Distance from centreline to inner attachment holes	11 17/32	293
Ⓖ Distance from centreline to outer attachment holes	12 3/4	324
Ⓗ Distance between inner attachment holes	23 1/8	587
Ⓘ Distance between outer attachment holes	25 15/32	647
⓵ Thickness of handle rail	2/3	17


Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

----- INDICATES CABINERY / PRODUCT DATUM

----- INDICATES CABINERY CLEARANCES

----- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

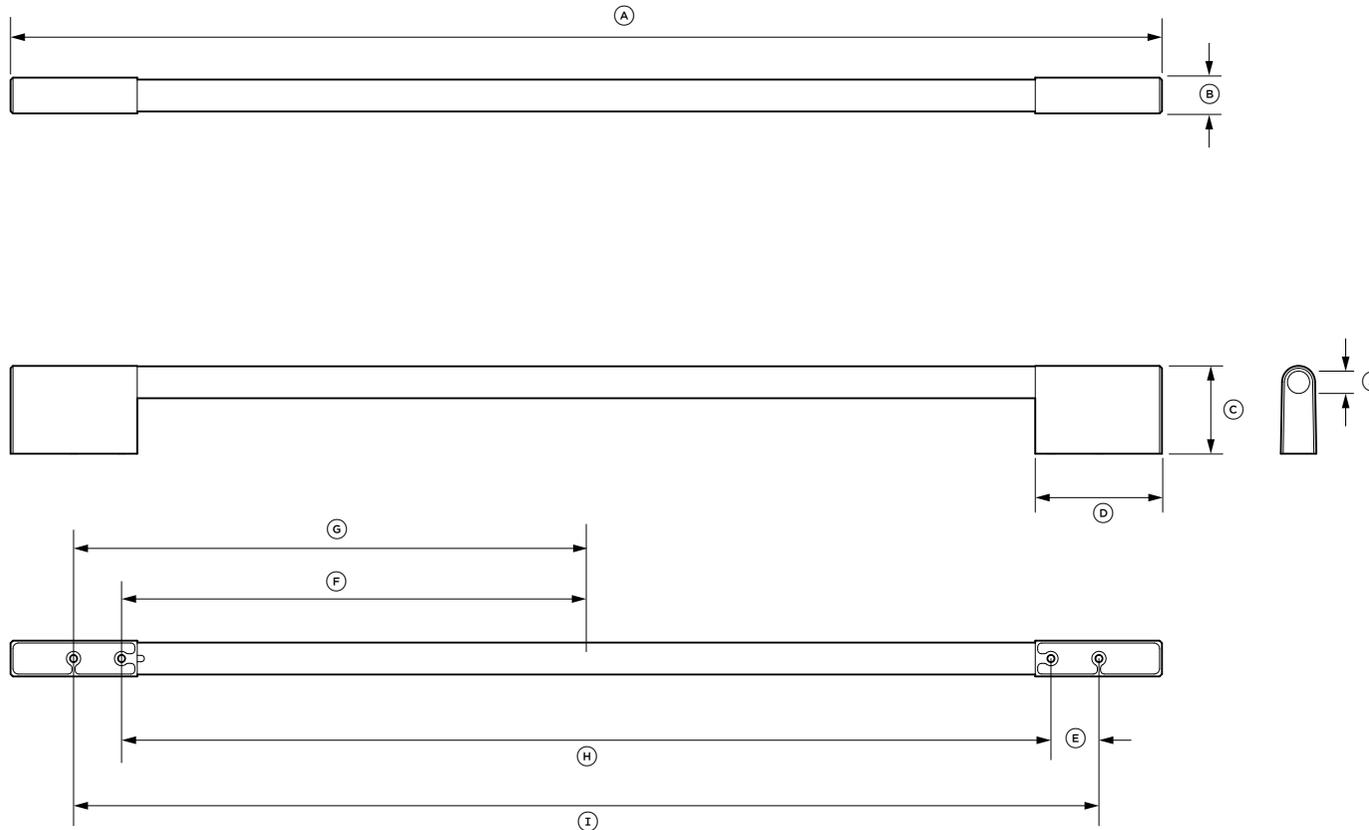

Model no:

AHCLRD36A

For models

RS36

Handle kits contain 2 door and 1 drawer handle.


Handle Dimensions

	in	mm
Ⓐ Overall length of handle	28 5/8	727
Ⓑ Overall depth of handle	7/8	22
Ⓒ Overall height of handle	2 3/16	56
Ⓓ Length of off-stand	3 5/32	80
Ⓔ Distance between attachment holes	1 3/16	30
Ⓕ Distance from centreline to inner attachment holes	11 17/32	329
Ⓖ Distance from centreline to outer attachment holes	12 15/16	359
Ⓗ Distance between inner attachment holes	25 29/32	658
Ⓙ Distance between outer attachment holes	25 29/32	719
⓫ Thickness of handle rail	25/32	20

Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

- INDICATES CABINERY / PRODUCT DATUM
- INDICATES CABINERY CLEARANCES
- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

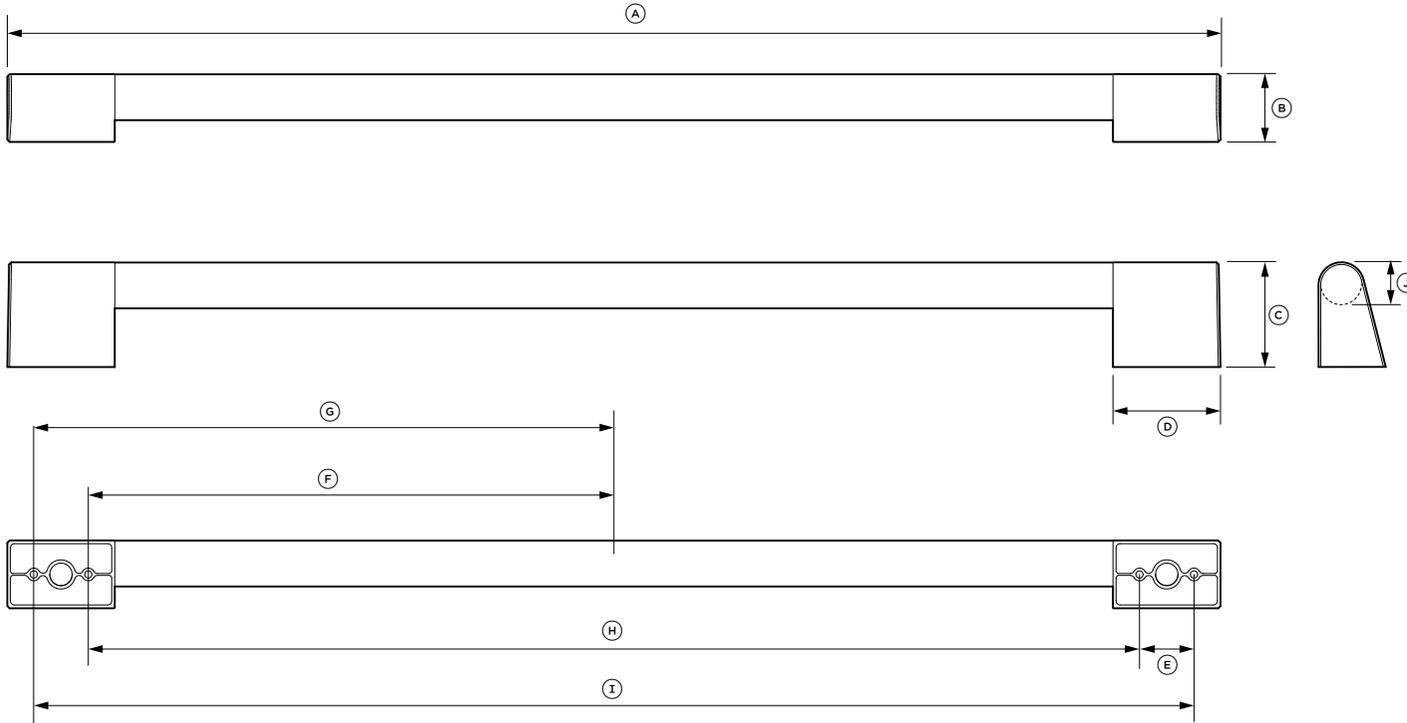

Model no:

AHP3RD36A

For models

RS36

Handle kits contain 2 door and 1 drawer handle.

Handle Dimensions

	in	mm
Ⓐ Overall length of handle	26 21/32	677
Ⓑ Overall depth of handle	1 7/16	37
Ⓒ Overall height of handle	2 9/32	58
Ⓓ Length of off-stand	4 23/32	60
Ⓔ Distance between attachment holes	2 3/8	30
Ⓕ Distance from centreline to inner attachment holes	11 17/32	293
Ⓖ Distance from centreline to outer attachment holes	12 23/32	323
Ⓗ Distance between inner attachment holes	23 1/16	586
Ⓘ Distance between outer attachment holes	25 15/32	647
Ⓝ Thickness of handle rail	1	25


Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

----- INDICATES CABINERY / PRODUCT DATUM

----- INDICATES CABINERY CLEARANCES

----- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

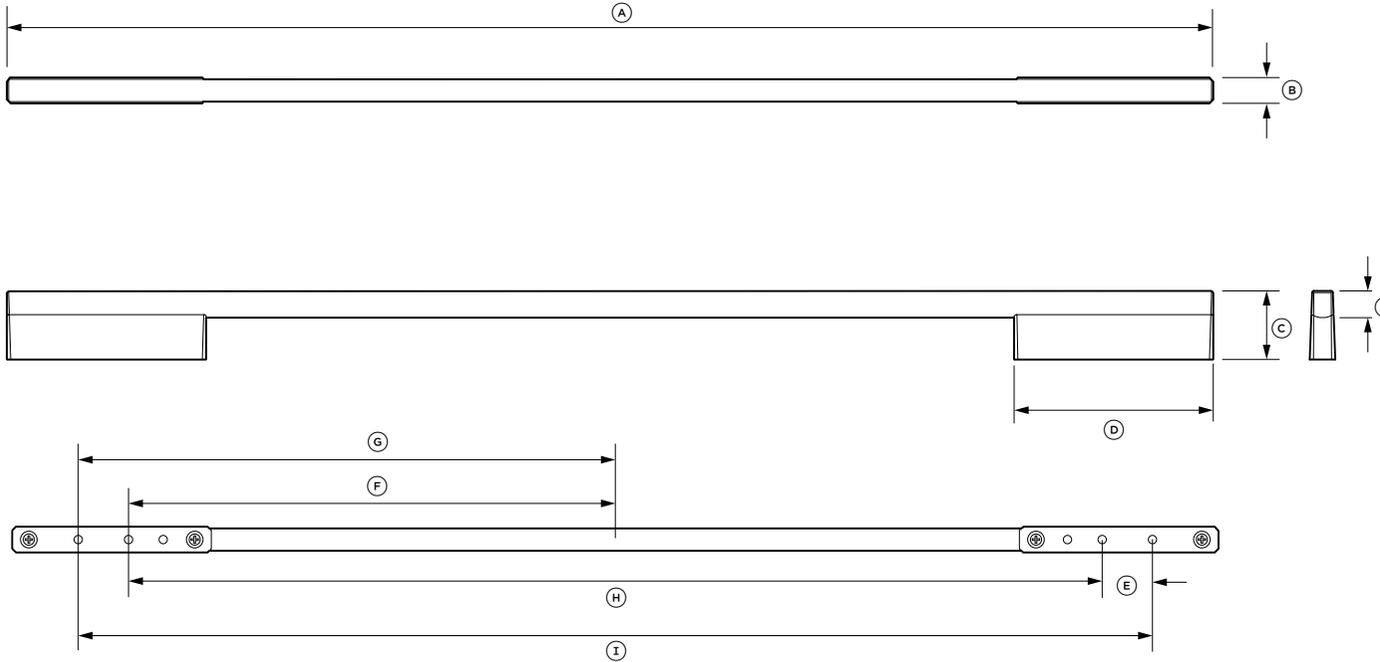

Model no:

Square Fine Handle Aluminium- AHD5RD32A
Black Square Fine Handle - AHD5RD32AB

For models


RS32 Handle kits contain 2 door and 1 drawer handle.

Handle Dimensions	in	mm
Ⓐ Overall length of door handles	28 5/8	727
Overall length of drawer handles	26 3/4	679
Ⓑ Overall depth of handle	19/32	15
Ⓒ Overall height of handle	1 5/8	41
Ⓓ Length of off-stand	4 23/32	120
Ⓔ Distance between attachment holes	1 3/16	30
Ⓕ Door handle distance from centreline to inner attachment holes	11 17/32	293
Drawer handle distance from centreline to inner attachment holes	10 19/32	269
Ⓖ Door handle distance from centreline to outer attachment holes	12 3/4	324
Drawer handle distance from centreline to outer attachment holes	11 25/32	299
Ⓖ Door handle distance between inner attachment holes	23 1/8	587
Drawer handle distance between inner attachment holes	21 3/16	538
Ⓙ Door handle distance between outer attachment holes	25 15/32	647
Drawer handle distance between outer attachment holes	23 19/32	599
Ⓚ Thickness of handle rail	5/8	16

Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

- INDICATES CABINETRY / PRODUCT DATUM
- INDICATES CABINETRY CLEARANCES
- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

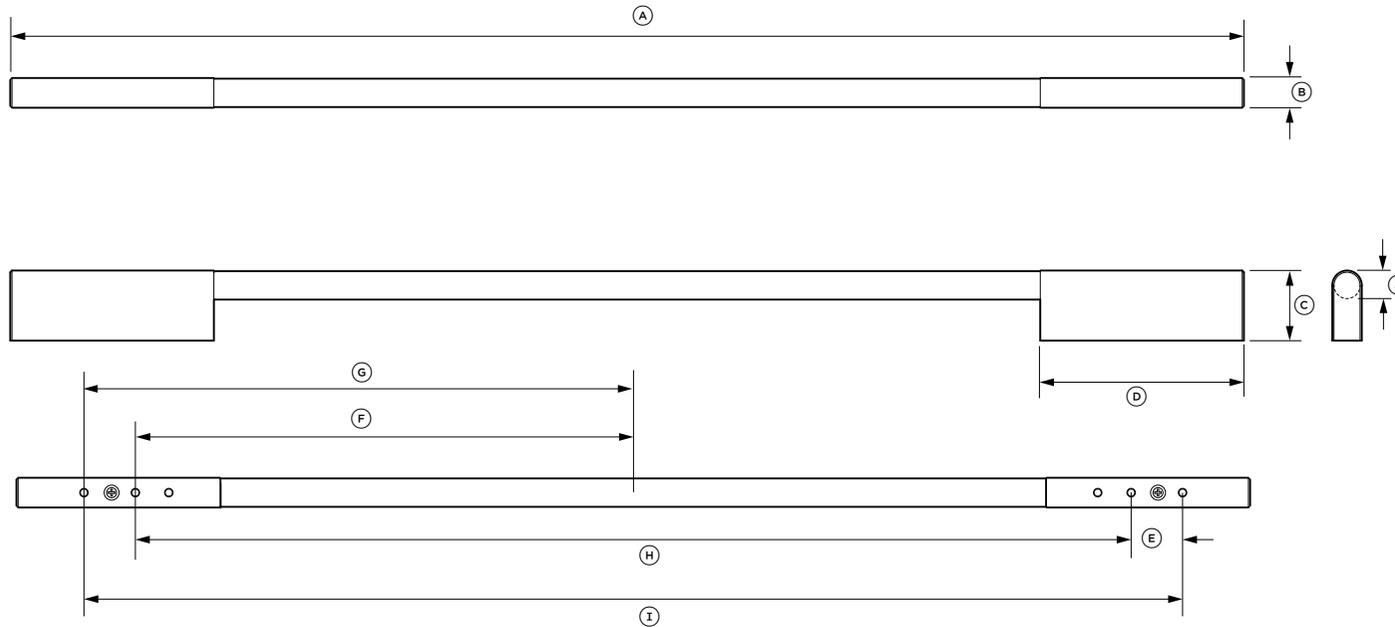

Model no:

AHSRS3272A

For models

RS32 Handle kits contain 2 door and 1 drawer handle.

Handle Dimensions	in	mm
Ⓐ Overall length of door handles	28 5/8	727
Overall length of drawer handles	26 3/4	679
Ⓑ Overall depth of handle	2/3	17
Ⓒ Overall height of handle	1 5/8	41
Ⓓ Length of off-stand	4 23/32	120
Ⓔ Distance between attachment holes	1 3/16	30
Ⓕ Door handle distance from centreline to inner attachment holes	11 17/32	293
Drawer handle distance from centreline to inner attachment holes	10 19/32	269
Ⓖ Door handle distance from centreline to outer attachment holes	12 3/4	324
Drawer handle distance from centreline to outer attachment holes	11 13/16	300
ⒼⓇ Door handle distance between inner attachment holes	23 1/8	587
Drawer handle distance between inner attachment holes	21 7/32	539
ⒼⒽ Door handle distance between outer attachment holes	25 15/32	647
Drawer handle distance between outer attachment holes	23 19/32	599
Ⓙ Thickness of handle rail	2/3	17


Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

----- INDICATES CABINERY / PRODUCT DATUM

----- INDICATES CABINERY CLEARANCES

----- INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

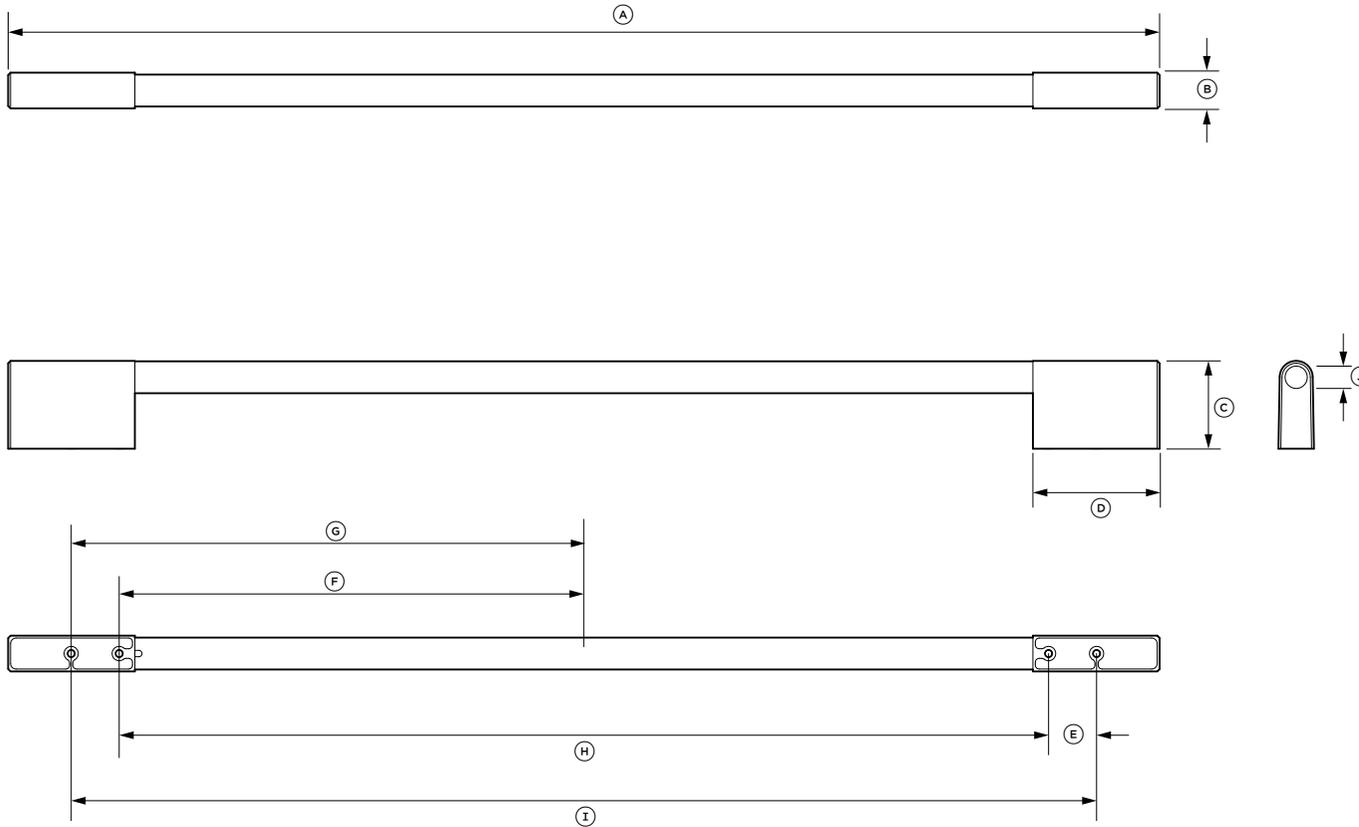

Model no:

AHCLRD32A

For models


RS32 Handle kits contain 2 door and 1 drawer handle.

Handle Dimensions	in	mm
Ⓐ Overall length of door handles	28 5/8	727
Overall length of drawer handles	26 3/4	679
Ⓑ Overall depth of handle	7/8	22
Ⓒ Overall height of handle	2 3/16	56
Ⓓ Length of off-stand	3 5/32	80
Ⓔ Distance between attachment holes	1 3/16	30
Ⓕ Door handle distance from centreline to inner attachment holes	12 15/16	329
Drawer handle distance from centreline to inner attachment holes	10 19/32	269
Ⓖ Door handle distance from centreline to outer attachment holes	12 3/4	359
Drawer handle distance from centreline to outer attachment holes	11 13/16	300
Ⓗ Door handle distance between inner attachment holes	25 29/32	658
Drawer handle distance between inner attachment holes	21 7/32	539
Ⓙ Door handle distance between outer attachment holes	28 5/16	719
Drawer handle distance between outer attachment holes	23 19/32	599
Ⓚ Thickness of handle rail	25/32	20

Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

----- INDICATES CABINERY / PRODUCT DATUM
 - - - - - INDICATES CABINERY CLEARANCES
 - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

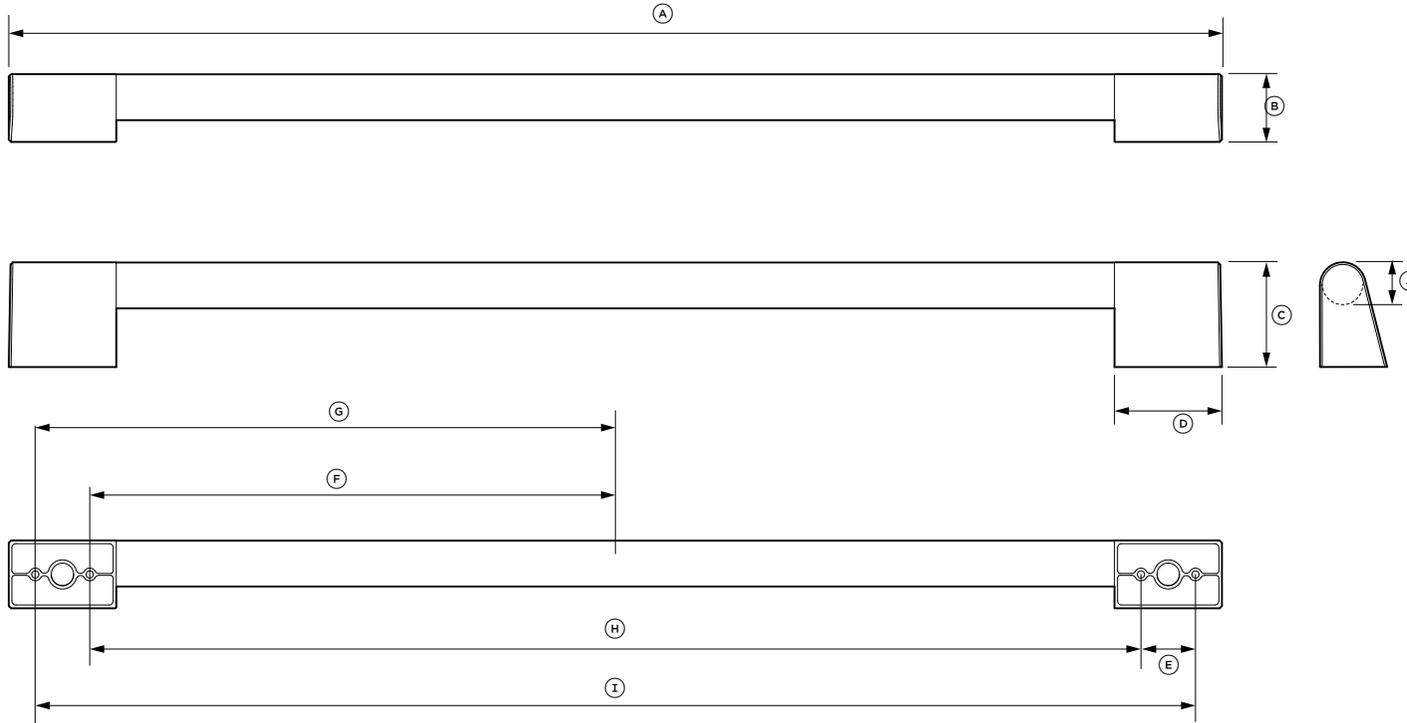

Model no:

AHP3RD32A

For models

RS32 Handle kits contain 2 door and 1 drawer handle.

Handle Dimensions	in	mm
Ⓐ Overall length of door handles	26 21/32	677
Overall length of drawer handles	24 3/4	629
Ⓑ Overall depth of handle	1 7/16	37
Ⓒ Overall height of handle	2 9/32	58
Ⓓ Length of off-stand	2 3/8	60
Ⓔ Distance between attachment holes	1 3/16	30
Ⓕ Door handle distance from centreline to inner attachment holes	11 17/32	293
Drawer handle distance from centreline to inner attachment holes	10 19/32	269
Ⓖ Door handle distance from centreline to outer attachment holes	12 23/32	323
Drawer handle distance from centreline to outer attachment holes	11 13/16	300
Ⓗ Door handle distance between inner attachment holes	23 1/16	586
Drawer handle distance between inner attachment holes	21 3/16	538
Ⓙ Door handle distance between outer attachment holes	25 15/32	647
Drawer handle distance between outer attachment holes	23 19/32	599
⓵ Thickness of handle rail	1	25

Assumes 19mm door panels on adjacent cabinetry
 Handle kit contains 2 door and 1 drawer handle.
 M6 X 25mm Pan Head Socket Screw (2 per handle)

----- INDICATES CABINERY / PRODUCT DATUM
 - - - - - INDICATES CABINERY CLEARANCES
 - - - - - INDICATES CUTOUT

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

