

30" MINIMAL HANDLELESS OVENS AND COMPANIONS

PLANNING GUIDE

SERIES 9 & 11

SELF-CLEANING OVEN | OB30SMPUNB3, OB30SMPUNG3

SELF-CLEANING STEAM ASSIST OVEN | OB30SMPSUNB3, OB30SMPSUNG3

COMBI-STEAM | OS30SMUNB3, OS30SMUNG3

COMPACT COMBI-STEAM | OS30NMUNB3, OS30NMUNG3

COMPACT CONVECTION-SPEED | OM30NMUNB3, OM30NMUNG3

BUILT-IN COFFEE MAKER | EB30MSB3

WARMING DRAWER | WB30SMB3, WB30SMG3, WB30SDEI3

VACUUM DRAWER | VB30SMB3, VB30SMG3, VB30SDEI3

FISHER & PAYKEL

INTRODUCTION

This comprehensive planning guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

SUPPORT

For additional design planning and installation support please contact the Fisher & Paykel design support team.
designsupport@fisherpaykel.com

NOTES

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Refer to to our website fisherpaykel.com for the latest document version. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Specific installation guidance will be available with the product on delivery and on our website.

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
DESIGN CHOICE		DATA SHEETS		PLANNING CONSIDERATIONS	
Styles	4	Self-Cleaning Oven	24	Cabinetry Preparation	35
Minimal Family	5	Self-Cleaning Steam Assit Oven	25	Clearances	36
Installation Options	6	Combi-Steam Oven	26	Ventilation	37
Overview	7	Compact Combi-Steam Oven	27	Stack Height	38
		Compact Convection-Speed Oven	28	Self-Cleaning Oven	39
SPECIFICATION GUIDE		Built-In Coffee Maker	29	Self-Cleaning Steam Assist Oven	40
Self-Cleaning Oven	9	Warming Drawer	30	Combi-Steam Oven	41
Self-Cleaning Steam Assist Oven	10	Integrated Warming Drawer	31	Compact Combi-Steam Oven	42
Combi-Steam Oven	11	Vacuum Seal Drawer	32	Compact Convection-Speed Oven	43
Compact Combi-Steam Oven	12	Integrated Vacuum Seal Drawer	33	Built-in Coffee Maker	44
Compact Convection-Speed Oven	13			Warming Drawer	45
Built-In Coffee Maker	14			Integrated Warming Drawer	46
Warming Drawer	15			Vacuum Seal Drawer	47
Integrated Warming Drawer	16			Integrated Vacuum Seal Drawer	48
Vacuum Seal Drawer	17				
Integrated Vacuum Seal Drawer	18			SERVICES	
Dimensions - Ovens	19			Power Cord Length and Location - Ovens	50
Dimensions - Compact Ovens & Built-In Coffee Maker	20			Power Cord Length and Location - Compact	51
Dimensions - Drawers	21			Power Cord Length and Location - Companions	52
Services	22				

DESIGN CHOICE



MINIMAL STYLE - HANDLELESS

MINIMAL STYLE

CONTEMPORARY STYLE

PROFESSIONAL STYLE

Celebrating a singular aesthetic to blend seamlessly into the kitchen, Minimal style ovens feature subtle textural and tonal contrasts for a sense of refinement and purity.

Defined by clean lines and timeless design cues, Contemporary style ovens bring a sense of balance and refinement. A versatile aesthetic that complements a range of kitchen styles.

Distinctive and bold, Professional style ovens are the perfect interpretation of the commercial kitchen for the home chef. Experience refined performance with stainless steel construction that is built to last.

This Planning Guide is for the Minimal Handleless Style 30" Ovens and Companions. For information on other styles, please visit the Fisher and Paykel website. To see what models are available, head to the 'Overview' section in this Planning Guide.



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

OVENS

INSTALLATION OPTIONS



**COFFEE
MAKER**

**WARMING DRAWERS
VACUUM SEAL DRAWERS**



Grey

Minimal Handle Family Series 9 and 11

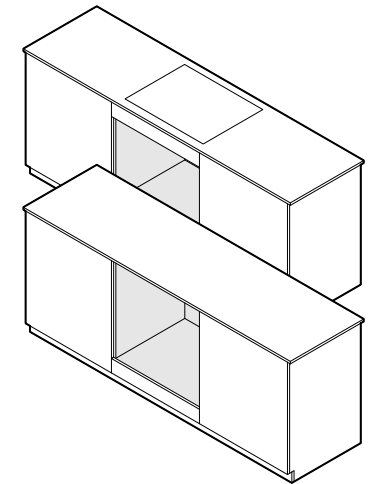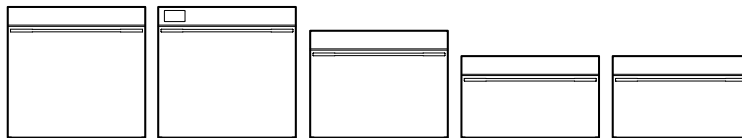

Installation under-bench

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

CONSIDERATIONS

Different configurations possible, consider heights for grid and row installations.

STACK HEIGHT


Stack Height is overall product height with minimum clearance above appliance front panel to upper cabinetry front panel or appliance.

STACKED INSTALLATION

Stack Height
52 3/8" (1331mm)




Stack Height
57 9/16" (1462mm)




GRID INSTALLATION


Stack Height
46 7/8" (1191mm)



Stack Height
28 3/4" (731mm)




Stack Height
28 3/4" (731mm)




ROW INSTALLATION

Stack Height
28 3/4" (731mm)

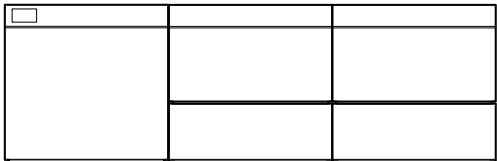

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

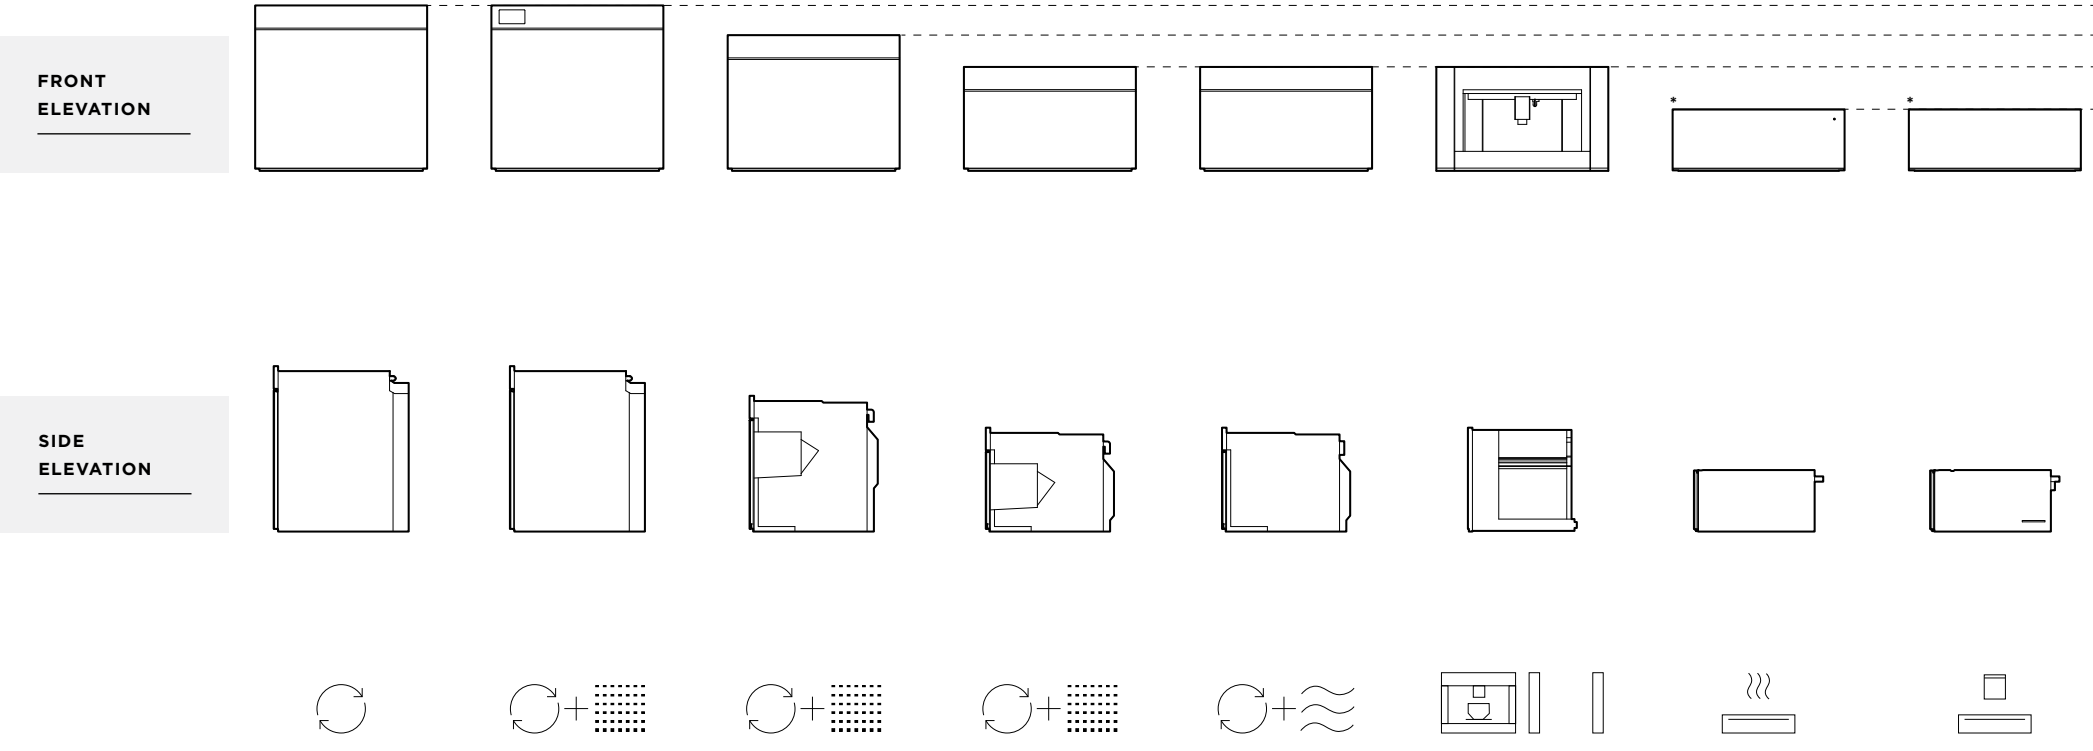

	SELF-CLEANING OVEN	SELF-CLEANING STEAM ASSIST OVEN	COMBI-STEAM OVEN	COMPACT COMBI-STEAM OVEN	COMPACT CONVECTION-SPEED OVEN	BUILT-IN COFFEE MAKER	WARMING DRAWER	VACUUM SEAL DRAWER
Series	Series 9	Series 11	Series 11	Series 9	Series 9	Series 9	Series 9	Series 9
Black Models	OB30SMPUNB3	OB30SMPSUNB3	OS30SMUNB3	OS30NMUNB3	OM30NMUNB3	EB30MSB3	WB30SMB3	VB30SMB3
Grey Models	OB30SMPUNG3	OB30SMPSUNG3	OS30SMUNG3	OS30NMUNG3	OM30NMUNG3	-	WB30SMG3	VB30SMG3
Integrated Models	-	-	-	-	-	-	WB30SDEI3	VB30SDEI3
Interface	6.8" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	6.8" Touchscreen	4.3" Touchscreen	-	-
Overall Height	28 11/16" (729mm)	28 11/16" (729mm)	23 9/16" (598mm)	18" (458mm)	18" (458mm)	18" (458mm)	10 11/16" (271mm)	10 11/16" (271mm)
Front Panel Thickness	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)	13/16" (20mm)

*Integrated models available.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

SPECIFICATION GUIDE

SERIES 11 & 9



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

OVERVIEW

Designed to complement Minimal style appliances, this handleless oven delivers a clean, uninterrupted finish – ideal for true handleless kitchen designs. Pyrolytic self-cleaning simplifies maintenance, while precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmarthQ™.

PRODUCTS

OB30SMPUNB3 - Black
30" Series 9 Minimal Handleless Self-Cleaning Oven

OB30SMPUNG3 - Grey
30" Series 9 Minimal Handleless Self-Cleaning Oven

SERIES & STYLE

Series 9
Minimal

FEATURES

- ① Handleless oven design ensures smooth, uninterrupted lines in kitchen cabinetry for a cohesive look
- ② Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ③ Effortlessly open and close the oven with a gentle press of a button, ensuring convenience and smooth operation in the kitchen
- ④ Generous 4.6 cu ft useable capacity
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Twin vertical fans, perfect for multi-shelf cooking
- ⑧ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑨ Connected capability via the SmarthQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray
- ④ Roasting Dish
- ⑤ Wired Temperature Sensor



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

OVERVIEW

Designed to complement Minimal style appliances, this handleless oven offers a sleek, uninterrupted finish – ideal for true handleless kitchen designs. Steam Assist enhances convection cooking, while pyrolytic cleaning simplifies maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OB30SMPSUNB3 - Black
30" Series 11 Minimal Handleless Self-Cleaning Steam Assist Oven

OB30SMPSUNG3 - Grey
30" Series 11 Minimal Handleless Self-Cleaning Steam Assist Oven

SERIES & STYLE

Series 11
Minimal

ACCESSORIES

- ① Self-cleaning-proof Side Ladders
- ② Full Extension Sliding Shelf (x3)
- ③ Multi-functional Air Fry Tray

FEATURES

- ① Handleless oven design ensures smooth, uninterrupted lines in kitchen cabinetry for a cohesive look
- ② Steam Assist combines convection heat with steam to enhance the cooking process
- ③ Self-cleaning pyrolytic function breaks down food residue for an easy clean
- ④ Effortlessly open and close the oven with a gentle press of a button, ensuring convenience and smooth operation in the kitchen
- ⑤ Generous 4.6 cu ft useable capacity
- ⑥ Large 6.8" touchscreen is intuitive and easy to use
- ⑦ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑧ Twin vertical fans, perfect for multi-shelf cooking
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ④ Roasting Dish
- ⑤ Wired Temperature Sensor
- ⑥ Descale Solution - 2 sachets (Part 580925)



OVERVIEW

Designed to complement Minimal style appliances, this handleless Combi-Steam oven offers a sleek, uninterrupted finish – ideal for true handleless kitchen designs. Featuring a larger cavity ideal for cooking larger dishes and multiple trays simultaneously. With versatile cooking options including steam or convection, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

- OS30SMUNB3 - Black**
30" Series 11 Minimal Handleless Combi-Steam Oven
- OS30SMUNG3 - Grey**
30" Series 11 Minimal Handleless Combi-Steam Oven

SERIES & STYLE

Series 11
Minimal

ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf (x2)
- ③ Step Down Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack

FEATURES

- ① Handleless design ensures smooth, uninterrupted lines in kitchen cabinetry for a cohesive look
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Effortlessly open and close the oven with a gentle press of a button, ensuring convenience and smooth operation in the kitchen
- ④ Generous 2.5 cu ft useable capacity with six shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ⑥ Smokeless Broil Tray
- ⑦ Large Perforated Steam Dish
- ⑧ Small Perforated Steam Dish
- ⑨ Large Steam Dish
- ⑩ Wired Temperature Sensor
- ⑪ Descale Solution - 2 sachets (Part 580925)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



OVERVIEW

Designed to complement Minimal style appliances, this handleless Combi-Steam oven offers a sleek, uninterrupted finish – ideal for true handleless kitchen designs. With versatile cooking options including steam or convection heat, plus a Steam Clean function for easy maintenance. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

OS30NMUNB3 - Black
30" Series 9 Minimal Handleless Compact Combi-Steam Oven

OS30NMUNG3 - Grey
30" Series 9 Minimal Handleless Compact Combi-Steam Oven

SERIES & STYLE

Series 9
Minimal

ACCESSORIES

- ① Chrome Side Ladders
- ② Full Extension Sliding Shelf
- ③ Flat Wire Shelf
- ④ Roasting Dish
- ⑤ Broil Rack

FEATURES

- ① Handleless design ensures smooth, uninterrupted lines in kitchen cabinetry for a cohesive look
- ② Versatile cooking options with steam or convection heat for optimal results
- ③ Effortlessly open and close the oven with a gentle press of a button, ensuring convenience and smooth operation in the kitchen
- ④ 1.6 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Moisture control and even heat distribution thanks to ActiveVent™ and AeroTech™ technology
- ⑧ Steam Clean function ensures a spotless oven with minimal effort
- ⑨ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑩ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ⑥ Large Perforated Steam Dish
- ⑦ Small Perforated Steam Dish
- ⑧ Large Steam Dish
- ⑩ Wired Temperature Sensor
- ⑪ Descale Solution - 2 sachets (Part 580925)

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

OVERVIEW

Designed to complement Minimal style appliances, this handleless Convection-Speed oven offers a sleek, uninterrupted finish – ideal for true handleless kitchen designs. Versatile cooking options including microwave or convection offer efficient heating across a variety of dishes. Precise cooking methods with temperature and heat type recommendations for a wide range of food types are easily accessed via the large touch screen and SmartHQ™.

PRODUCTS

- OM30NMUNB3 - Black**
30" Series 9 Minimal Handleless Compact Convection-Speed Oven
- OM30NMUNG3 - Grey**
30" Series 9 Minimal Handleless Compact Convection-Speed Oven

SERIES & STYLE

Series 9
Minimal

FEATURES

- ① Handleless design ensures smooth, uninterrupted lines in kitchen cabinetry for a cohesive look
- ② Combines fast microwave cooking with even convection heat for versatile, efficient heating across a variety of dishes
- ③ With soft open and close, the CoolTouch door is safe to touch from the outside - protecting hands and surrounding cabinetry
- ④ Generous 1.3 cu ft useable capacity with four shelf positions
- ⑤ Large 6.8" touchscreen is intuitive and easy to use
- ⑥ Create perfect results with precise cooking methods, with temperature and heat type recommendations for your food type
- ⑦ Includes a wired temperature sensor for real-time monitoring of cooking temperatures
- ⑧ Connected capability via the SmartHQ™ app gives control & visibility from anywhere at anytime

ACCESSORIES

- ① Chrome Side Ladders
- ② Flat Wire Shelf
- ③ Step Down Wire Shelf
- ④ Broil Rack
- ⑤ Glass Tray
- ⑥ Wired Temperature Sensor



OVERVIEW

Designed to complement Minimal style appliances, this Coffee Maker delivers a seamless, flush finish – ideal for modern kitchen designs. It remembers your favorite brews over time, offering personalized coffee at the touch of a button. With precise grinding, creamy milk frothing, and effortless self-cleaning, it brings barista-quality coffee home.

PRODUCTS

EB30MSB3 - Black
30" Series 9 Minimal Built-in Coffee Maker

SERIES & STYLE

Series 9
Minimal


FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Intuitive touch display brews a perfect cup of coffee at the touch of a button
- ③ Programmable timer turns on the Coffee Maker at the ideal time each day
- ④ Personalised coffee and smart self-learning menu preferences with 13 functions to suit any taste
- ⑤ Allows you to prepare hot milk or creamy froth in seconds
- ⑥ Stainless steel conical burr grinder with 13 coarseness positions
- ⑦ 15 bar pump pressure
- ⑧ Self-cleaning function and easy to empty coffee grounds container and drip tray
- ⑨ 81 fl oz (2.4L) water tank capacity

ACCESSORIES

- ① Milk Container (Auto-Froth)
- ② Steam Wand
- ③ Coffee Spoon
- ④ Cleaning Brush
- ⑤ Descaler Solution - 1 bottle
- ⑥ Water Hardness Indicator Paper
- ⑦ Water Filter

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

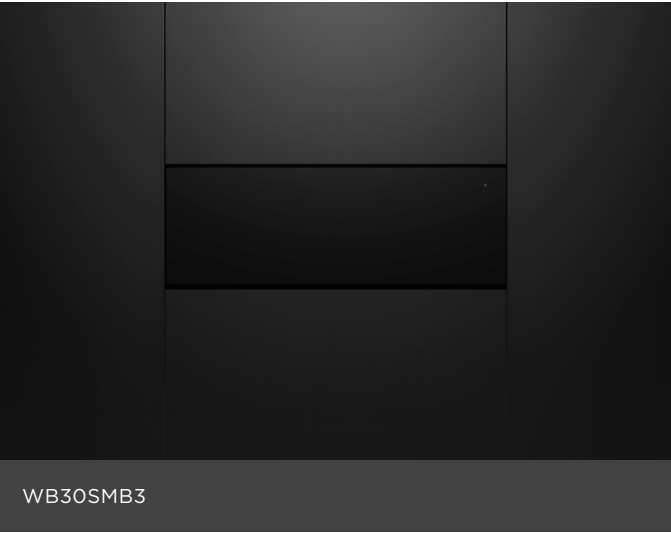

OVERVIEW

Designed to complement Minimal style appliances, this Warming Drawer delivers a seamless, flush finish – ideal for modern kitchen designs. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

PRODUCTS

WB30SMB3 - Black
30" Series 9 Minimal Warming Drawer

WB30SMG3 - Grey
30" Series 9 Minimal Warming Drawer

SERIES & STYLE

Series 9
Minimal


FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean glass base
- ⑤ Automatic switch-off and delayed start functionality to help keep dishes warm until it is time to serve
- ⑥ Room for 16 standard-sized place settings
- ⑦ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility

ACCESSORIES

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

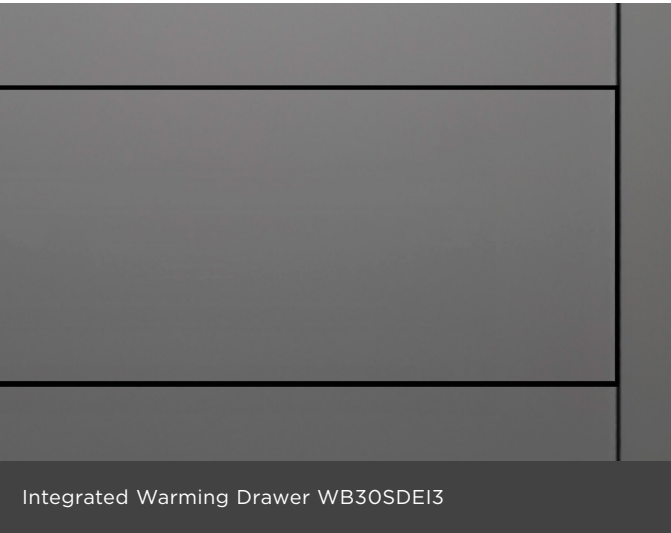

OVERVIEW

Panel ready design allows for seamless integration and customisation of this Warming Drawer with kitchen cabinetry for a cohesive kitchen look. Featuring a push-to-open mechanism, intuitive touch controls, and a smooth glass base for easy cleaning. With six tailored programmes and space for 16 place settings, it keeps meals ready to serve.

PRODUCTS

WB30SDEI3*
30" Series 9 Integrated Warming Drawer

*Panel ready.

SERIES & STYLE

Series 9
Integrated



FEATURES

- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Automatic switch-off and delayed start functionality, to help keep dishes warm until it is time to serve
- ⑤ Room for 16 standard-sized place settings
- ⑥ Six tailored programmes including Warming, Proofing, Dehydrating, and Slow Cooking offer convenience and flexibility

ACCESSORIES

- ① Accessory rack for optimising space

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

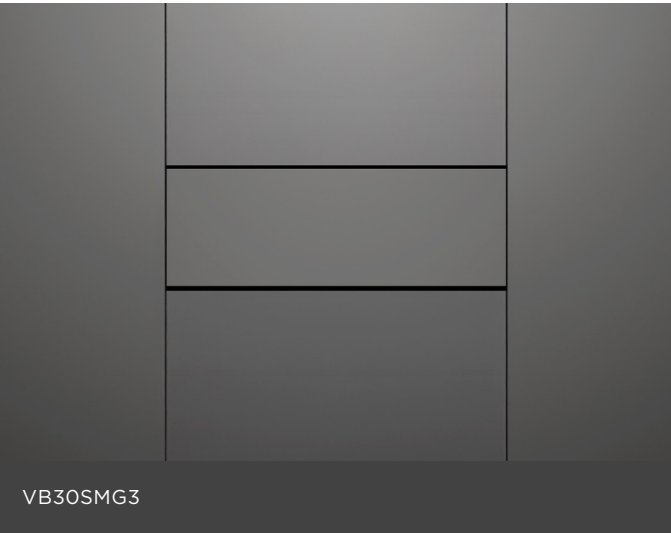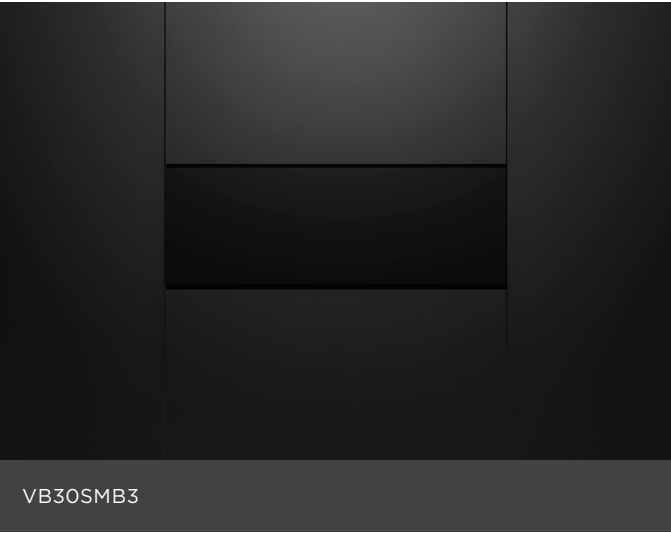

OVERVIEW

Designed to complement Minimal style appliances, this Vacuum Seal Drawer delivers a seamless, flush finish – ideal for modern kitchen designs. A push-to-open mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

PRODUCTS

VB30SMB3 - Black
30" Series 9 Minimal Vacuum Seal Drawer

VB30SMG3 - Grey
30" Series 9 Minimal Vacuum Seal Drawer

SERIES & STYLE

Series 9
Minimal

FEATURES

- ① Minimal style is designed to fit flush with cabinetry. Matches our Minimal style family of appliances
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Easy-to-clean glass base
- ⑤ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑥ Allows effortless preparation for sous vide cooking
- ⑦ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately.

ACCESSORIES

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com



Integrated Vacuum Seal Drawer VB30SDEI3 with Compact Combi-Steam Oven OS30NMUNB3



Integrated Vacuum Seal Drawer VB30SDEI3

OVERVIEW

Panel ready design allows for seamless integration and customisation of this Vacuum Seal Drawer with kitchen cabinetry for a cohesive kitchen look. A push-to-open mechanism and intuitive touch controls offer effortless use, while three vacuum and heat sealing levels support sous vide preparation, marinating, and food storage, using reusable and BPA-free food-grade bags.

PRODUCTS

VB30SDEI3*
30" Series 9 Integrated Vacuum Seal Drawer

*Panel ready.

SERIES & STYLE

Series 9
Integrated

FEATURES

- ① Panel ready design allows for seamless integration and customisation with kitchen cabinetry for a cohesive kitchen look
- ② Push-to-open drawer, designed for added convenience
- ③ Simple and intuitive touch controls for effortless operation
- ④ Three levels of vacuum and heat sealing - for easy re-sealing, food portioning, marinating, storage and extending shelf life
- ⑤ Allows effortless preparation for sous vide cooking
- ⑥ Our food-grade, BPA-free bags are an excellent storage option — these can be re-used if sealed and cut appropriately.







ACCESSORIES

- ① Large BPA-free Vacuum Bags - 50 bags (Part 793034)
- ② Small BPA-free Vacuum Bags - 50 bags (Part 793033)
- ③ External Vacuuming Accessory Kit

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

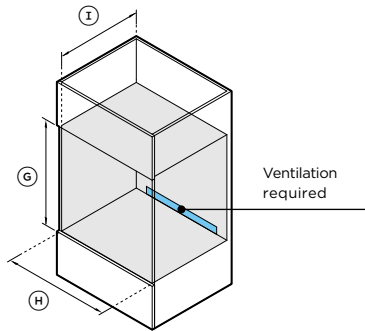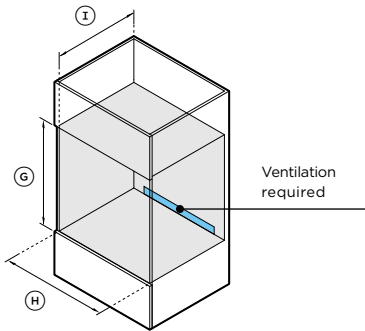

PRODUCT DIMENSIONS	
A Overall height	
B Overall width	
C Chassis height	
D Chassis width	
E Chassis depth	
F Control panel thickness	
Depth with door fully open*	

*Measured from front of control panel.

CAVITY DIMENSIONS	
G Minimum inside height of cavity	
H Minimum inside width of cavity	
I Minimum inside depth of cavity*	
Recommended cabinet height	
Recommended cabinet width	

*Measured from front of chassis.**Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide.

SELF-CLEANING OVEN OB30SMPUNB3, OB30SMPUNG3		
	inch	mm
A Overall height	28 11/16	729
B Overall width	29 7/8	758
C Chassis height	27 7/8	708
D Chassis width	28 3/8	720
E Chassis depth	22 5/8	575
F Control panel thickness	13/16	20
Depth with door fully open*	23 3/8	594

	inch	mm
G Minimum inside height of cavity	28 1/32	712
H Minimum inside width of cavity	28 1/2	724
I Minimum inside depth of cavity*	23 1/2**	597**
Recommended cabinet height	28 3/4	731
Recommended cabinet width	30	762

SELF-CLEANING STEAM ASSIST OVEN OB30SMPSUNB3, OB30SMPSUNG3		
	inch	mm
A Overall height	28 11/16	729
B Overall width	29 7/8	758
C Chassis height	27 7/8	708
D Chassis width	28 3/8	720
E Chassis depth	22 5/8	575
F Control panel thickness	13/16	20
Depth with door fully open*	23 3/8	594

	inch	mm
G Minimum inside height of cavity	28 1/32	712
H Minimum inside width of cavity	28 1/2	724
I Minimum inside depth of cavity*	23 1/2**	597**
Recommended cabinet height	28 3/4	731
Recommended cabinet width	30	762







COMBI-STEAM OVEN OS30SMUNB3, OS30SMUNG3		
	inch	mm
A Overall height	23 9/16	598
B Overall width	29 7/8	758
C Chassis height	22 5/8	575
D Chassis width	28 3/8	720
E Chassis depth	22 7/16	545
F Control panel thickness	13/16	20
Depth with door fully open*	18 1/8	460

	inch	mm
G Minimum inside height of cavity	22 13/16	580
H Minimum inside width of cavity	28 1/2	724
I Minimum inside depth of cavity*	21 5/8	550
Recommended cabinet height	24	600
Recommended cabinet width	30	762

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS

CAVITY DIMENSIONS

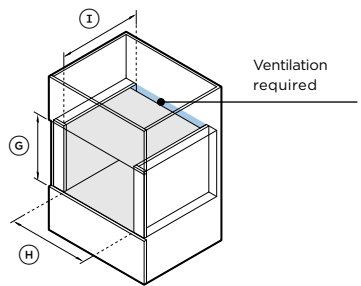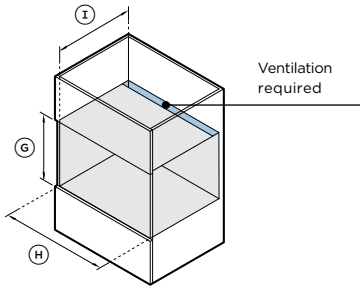

PRODUCT DIMENSIONS	
A Overall height	18
B Overall width	29 7/8
C Chassis height	17 1/8
D Chassis width	28 3/8
E Chassis depth	21 7/16
F Control panel thickness	13/16
Depth with door fully open**	12 5/8

*Measurements with trim kit. **Measured from front of control panel.

CAVITY DIMENSIONS	
G Minimum inside height of cavity	17 5/16
H Minimum inside width of cavity	28 1/2
I Minimum inside depth of cavity*	21 5/8
Recommended cabinet height	18 1/8
Recommended cabinet width	30

*Measured from front of chassis. **Requires ventilation at the rear of the cavity. For more information, refer to the 'Ventilation' section of this Planning Guide. ***Cabinetry requires additional vertical sidewalls to secure the product.

COMPACT COMBI-STEAM OVEN OS30NMUNB3, OS30NMUNG3	
inch	mm
18	458
29 7/8	758
17 1/8	435
28 3/8	720
21 7/16	545
13/16	20
12 5/8	320

inch	mm
17 5/16	440
28 1/2	724
21 5/8	550
18 1/8	460
30	762

COMPACT CONVECTION-SPEED OVEN OM30NMUNB3, OM30NMUNG3	
inch	mm
18	458
29 7/8	758
17 1/8	435
28 3/8	720
21 7/16	545
13/16	20
12 5/8	320





inch	mm
17 5/16	440
28 1/2	724
21 5/8**	550**
18 1/8	460
30	762

BUILT-IN COFFEE MAKER EB30MSB3	
inch	mm
18*	458*
29 7/8*	758*
17 1/2	445
22 1/16	560
18 1/8	460
13/16*	20*
-	-





inch	mm
17 3/4	450
22 1/16***	560***
22 1/16**	560**
18 1/8	460
30	762

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

PRODUCT DIMENSIONS



CAVITY DIMENSIONS



PRODUCT DIMENSIONS		
A	Overall height	
B	Overall width	
C	Chassis height	
D	Chassis width	
E	Chassis depth*	
F	Front panel thickness	
	Front panel height	
	Front panel width	

WARMING DRAWER WB30SMB3, WB30SMG3		
	inch	mm
A	10 11/16	271
B	29 7/8	758
C	10 11/16	271
D	27 3/4	704
E	21 9/16	547
F	13/16	20
	10 1/2	267
	29 7/8	758

INTEGRATED WARMING DRAWER WB30SDEI3		
	inch	mm
A	10 11/16	271
B	29 7/8	758
C	10 11/16	271
D	28 15/32	723
E	22 9/32	566
F	min 5/8***	min 16***
	min 10 1/2	min 267
	min 29 7/8	min 758

VACUUM SEAL DRAWER VB30SMB3, VB30SMG3		
	inch	mm
A	10 11/16	271
B	29 7/8	758
C	10 11/16	271
D	28 1/2**	724**
E	21 11/16	551
F	13/16	20
	10 1/2	267
	29 7/8	758

INTEGRATED VACUUM SEAL DRAWER VB30SDEI3		
	inch	mm
A	10 11/16	271
B	29 7/8	758
C	10 11/16	271
D	28 15/32**	723**
E	22 1/2	572
F	min 5/8***	min 16***
	min 10 1/2	min 267
	min 29 7/8	min 758

*Including power plug. **Including side brackets. ***A clearance of 1/16" (2mm) between the cabinet and the custom panel is required for the push-to-open mechanism (spacer included). Maximum custom panel weight 11 lb (5kg).

CAVITY DIMENSIONS		
G	Minimum inside height of cavity	
H	Minimum inside width of cavity	
I	Minimum inside depth of cavity*	
	Recommended cabinet height	
	Recommended cabinet width	

	inch	mm
G	10 3/4	273
H	28 1/2	724
I	22 13/16	580
	10 3/4	273
	30	762


	inch	mm
G	10 3/4	273
H	28 1/2	724
I	22 13/16	580
	10 3/4	273
	30	762

	inch	mm
G	10 3/4	273
H	28 1/2	724
I	22 13/16	580
	10 3/4	273
	30	762

	inch	mm
G	10 3/4	273
H	28 1/2	724
I	22 13/16	580
	10 3/4	273
	30	762

*Measured from front of chassis.
Note: Drawers can fully support 30inch Fisher & Paykel oven, without adding shelf in between.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

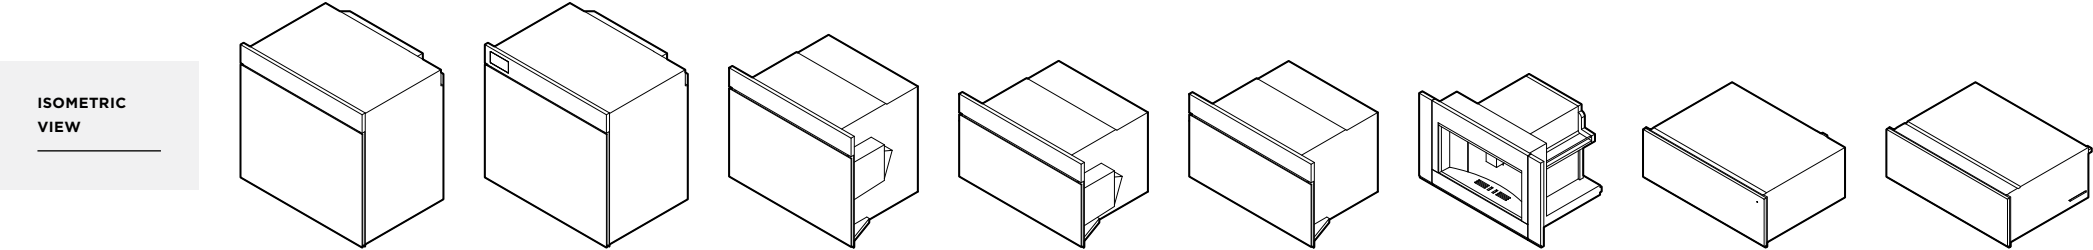


	SELF-CLEANING OVEN OB30SMPUNB3, OB30SMPUNG3	SELF-CLEANING STEAM ASSIST OVEN OB30SMPSUNB3, OB30SMPSUNG3	COMBI-STEAM OVEN OS30SMUNB3, OS30SMUNG3	COMPACT COMBI-STEAM OVEN OS30NMUNB3, OS30NMUNG3	COMPACT CONVECTION- SPEED OVEN OM30NMUNB3, OM30NMUNG3	BUILT-IN COFFEE MAKER EB30MSB3	WARMING DRAWER WB30SMB3, WB30SMG3, WB30SDEI3	VACUUM SEAL DRAWER VB30SMB3, VB30SMG3, VB30SDEI3
PRODUCT REQUIREMENTS								
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz	120 V, 60 Hz
Service	20 A	20 A	20 A	20 A	20 A	15 A	15 A	15 A
Connection	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Hard wired 78 3/4"(2000mm)	Plug with flex cord 66 15/16" (1700mm)	Plug with flex cord 70 7/8" (1800mm)	Plug with flex cord 70 7/8" (1800mm)
WEIGHT								
Packaged	209lb (95kg)	214lb (97kg)	152lb (69kg)	121lb (55kg)	121lb (55kg)	72lb (33kg)	66lb(30kg) Integrated 60lb (27kg)	148lb(67kg) Integrated 106lb (48kg)
Unpackaged	176lb (80kg)	181lb (82kg)	119lb (54kg)	101lb (46kg)	101lb (46kg)	52lb (24kg)	55lb(25kg) Integrated 51lb (23kg)	121lb(55kg) Integrated 99lb (45kg)
CAPACITY								
Total Oven capacity	4.9cu ft (137L)	4.9cu ft (137L)	3cu ft (85L)	1.9cu ft (55L)	1.7cu ft (49L)	-	-	-
Total water tank capacity	-	22.65fl oz (0.67L)	47.3fl oz (1.4L)	47.3fl oz (1.4L)	-	81 fl oz (2.4L)	-	-

Note: All Coffee Makers and Steam Ovens have internal water tanks which need to be filled manually. No external water supply is required.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)

DATA SHEETS

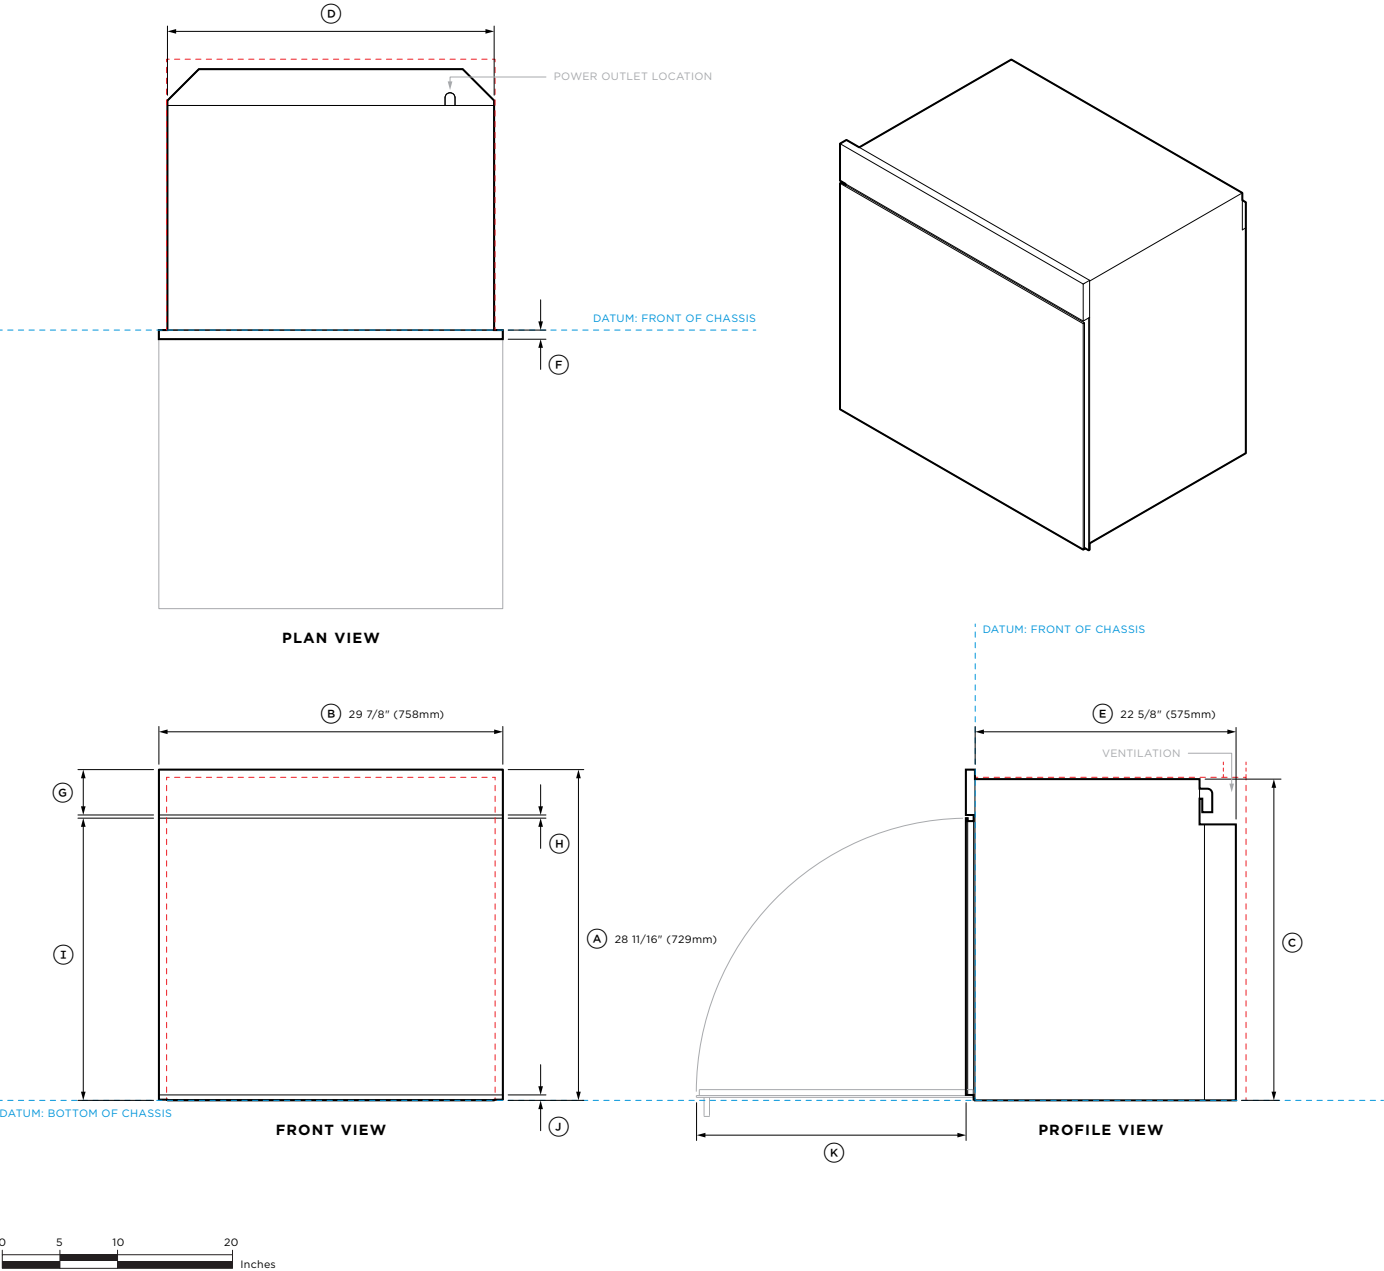

Model no:		
OB30SMPUNB3	30" Series 9 Minimal Handleless Self-Cleaning Oven - Black	
OB30SMPUNG3	30" Series 9 Minimal Handleless Self-Cleaning Oven - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	28 11/16	729
(B) Overall width of product	29 7/8	758
(C) Height of chassis	27 7/8	708
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	22 5/8	575
(F) Thickness of control panel	13/16	20
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	24 1/2	622
(J) Visual gap height	15/32	12
(K) Depth with door fully open*	23 3/8	594


*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	28 1/32	712
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	23 1/2	597
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	28 3/4	731
Recommended cabinet width	30	762

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

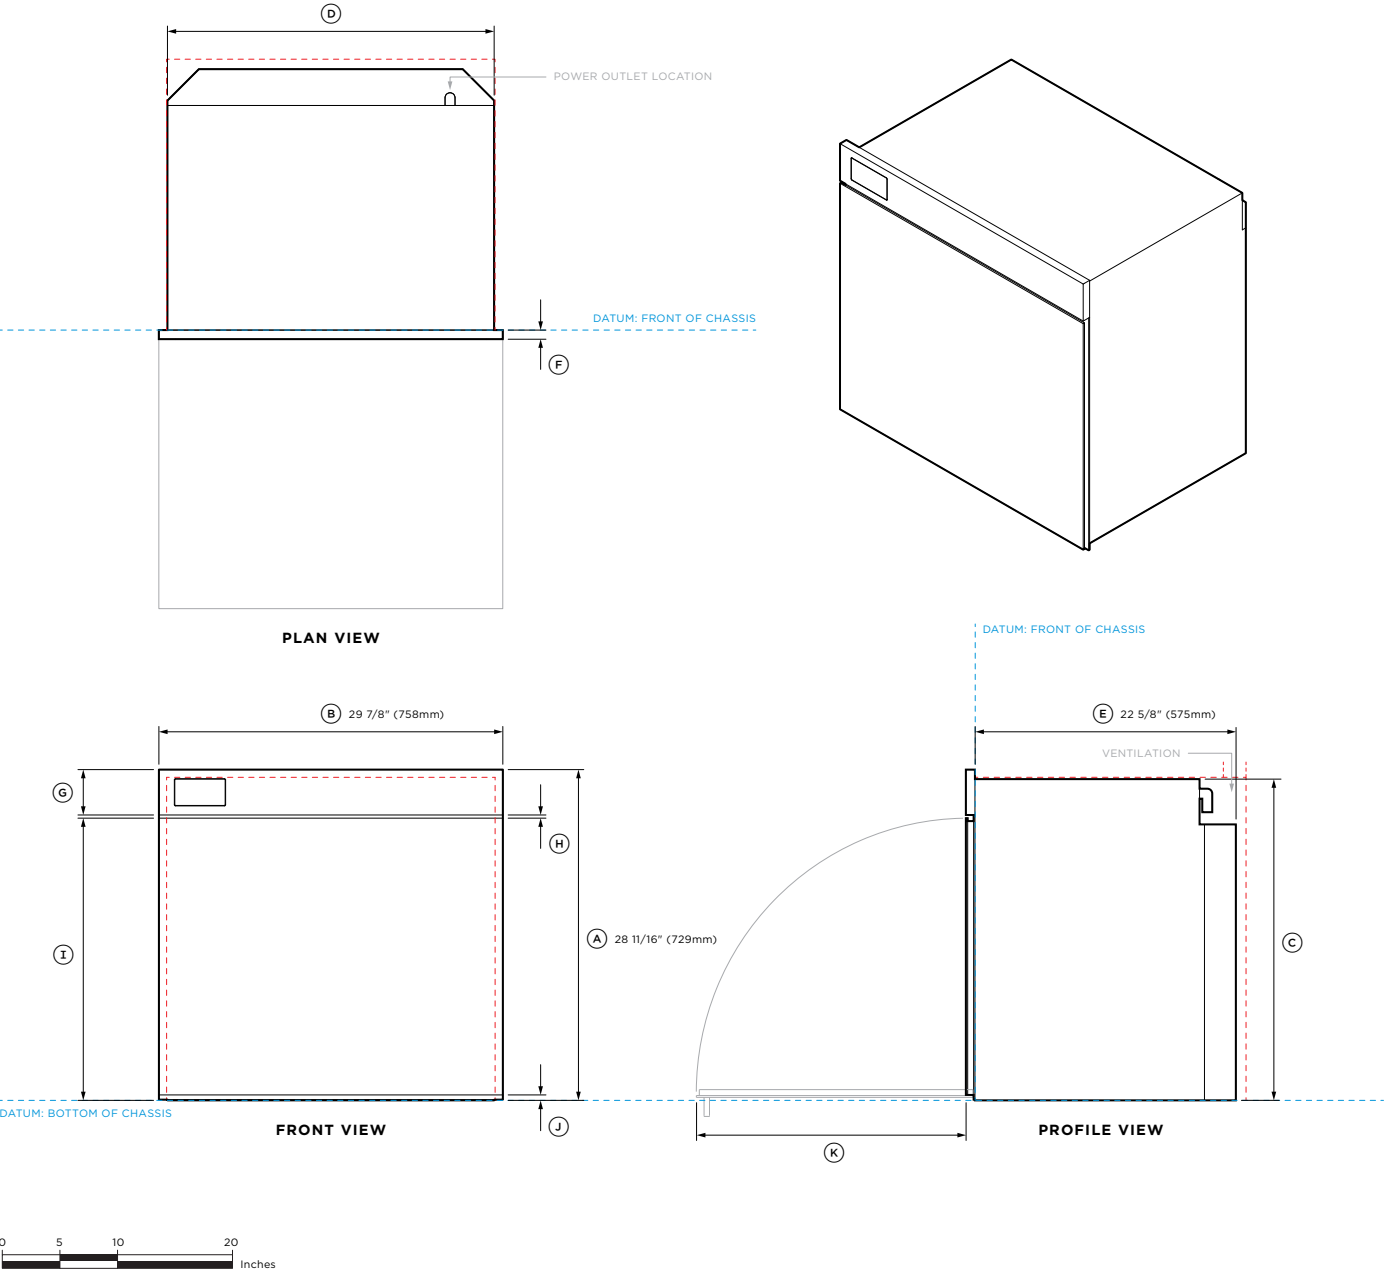

Model no:	
OB30SMPSUNB3	30" Series 11 Minimal Handleless Self-Cleaning Steam Assist Oven - Black
OB30SMPSUNG3	30" Series 11 Minimal Handleless Self-Cleaning Steam Assist Oven - Grey

Product Dimensions	inch	mm
A Overall height of product	28 11/16	729
B Overall width of product	29 7/8	758
C Height of chassis	27 7/8	708
D Width of chassis	28 3/8	720
E Depth of chassis	22 5/8	575
F Thickness of control panel	13/16	20
G Height of control panel	3 15/16	100
H Gap between door and control panel	9/32	7
I Height from bottom datum to top of door	24 1/2	622
J Visual gap height	15/32	12
K Depth with door fully open*	23 3/8	594




*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	28 1/32	712
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	23 1/2	597
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	28 3/4	731
Recommended cabinet width	30	762

*Measured from front of chassis.

**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

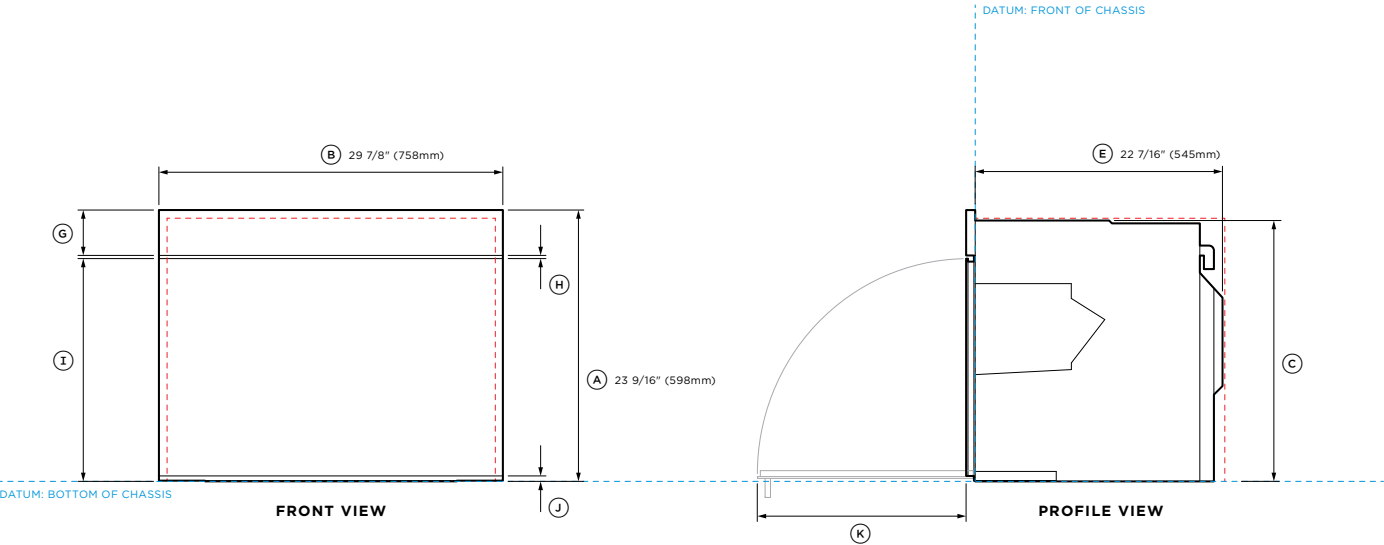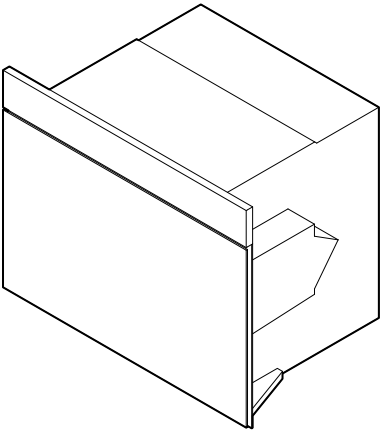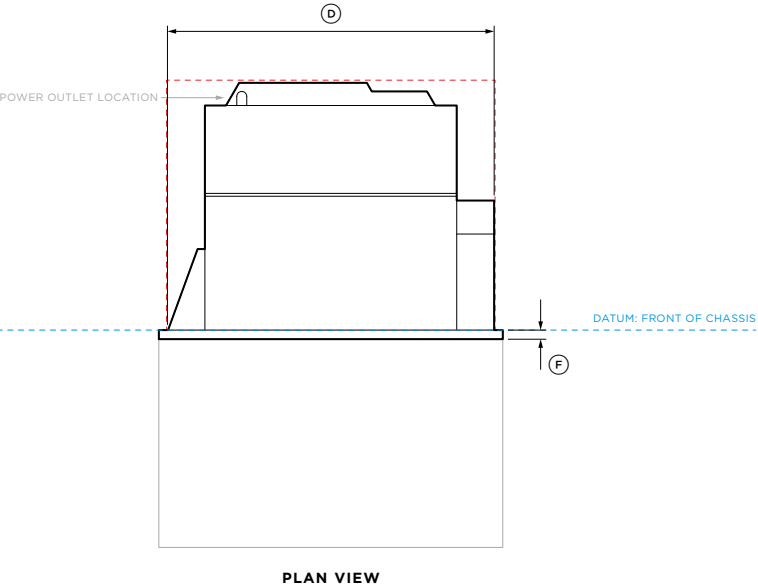

Model no:		
OS30SMUNB3	30" Series 11 Minimal Handleless Combi-Steam Oven - Black	
OS30SMUNG3	30" Series 11 Minimal Handleless Combi-Steam Oven - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	23 9/16	598
(B) Overall width of product	29 7/8	758
(C) Height of chassis	22 5/8	575
(D) Width of chassis	28 3/8	720
(E) Depth of chassis	22 7/16	545
(F) Thickness of control panel	18 1/8	20
(G) Height of control panel	3 15/16	100
(H) Gap between door and control panel	9/32	7
(I) Height from bottom datum to top of door	19 5/16	491
(J) Visual gap height	15/32	12
(K) Depth with door fully open*	18 1/8	460




*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	22 13/16	580
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	24	600
Recommended cabinet width	30	762

*Measured from front of chassis.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

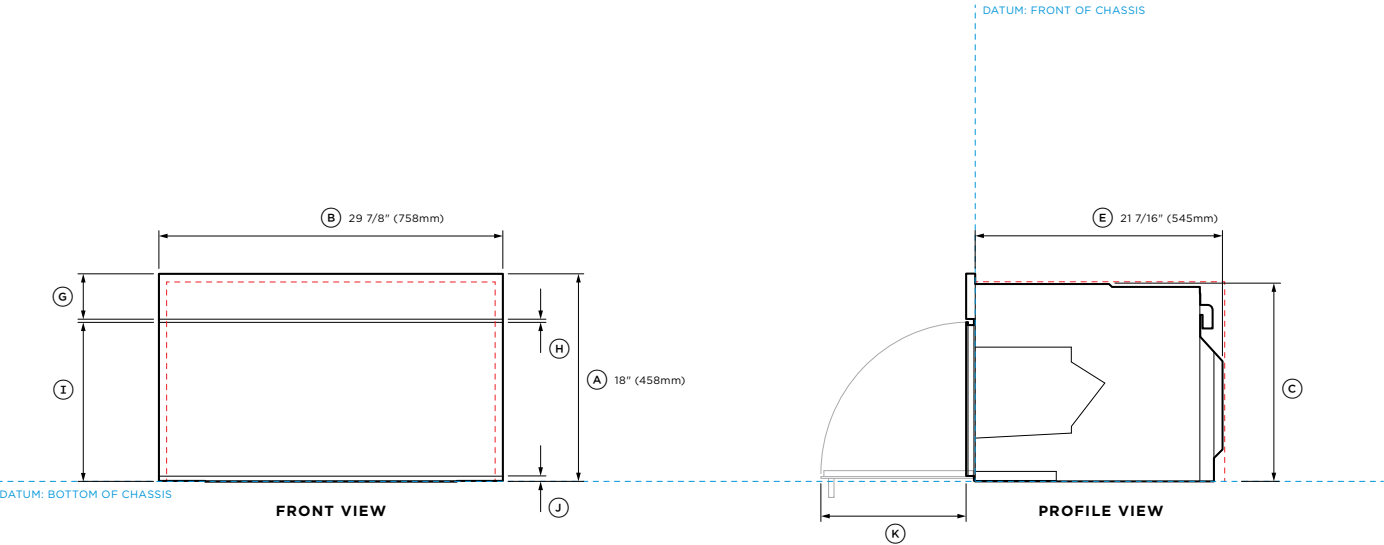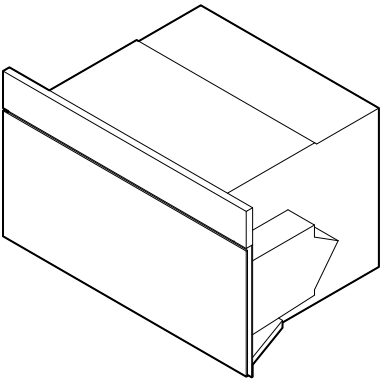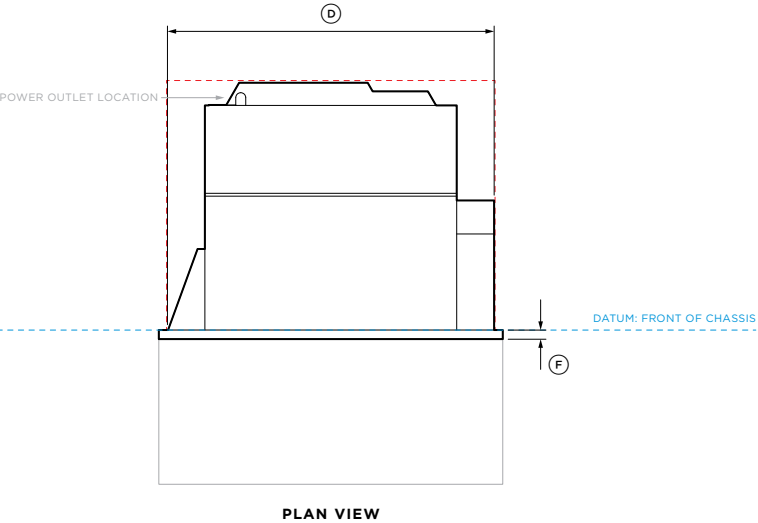

Model no:	
OS30NMUNB3	330" Series 9 Minimal Handleless Compact Combi-Steam Oven - Black
OS30NMUNG3	30" Series 9 Minimal Handleless Compact Combi-Steam Oven - Grey

Product Dimensions	inch	mm
A Overall height of product	18	458
B Overall width of product	29 7/8	758
C Height of chassis	17 1/8	435
D Width of chassis	28 3/8	720
E Depth of chassis	21 7/16	545
F Thickness of control panel	13/16	20
G Height of control panel	3 15/16	100
H Gap between door and control panel	9/32	7
I Height from bottom datum to top of door	13 13/16	351
J Visual gap height	15/32	12
K Depth with door fully open*	12 5/8	320




*Measured from front of control panel.

Minimum Clearances	inch	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

*Measured from front of chassis.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

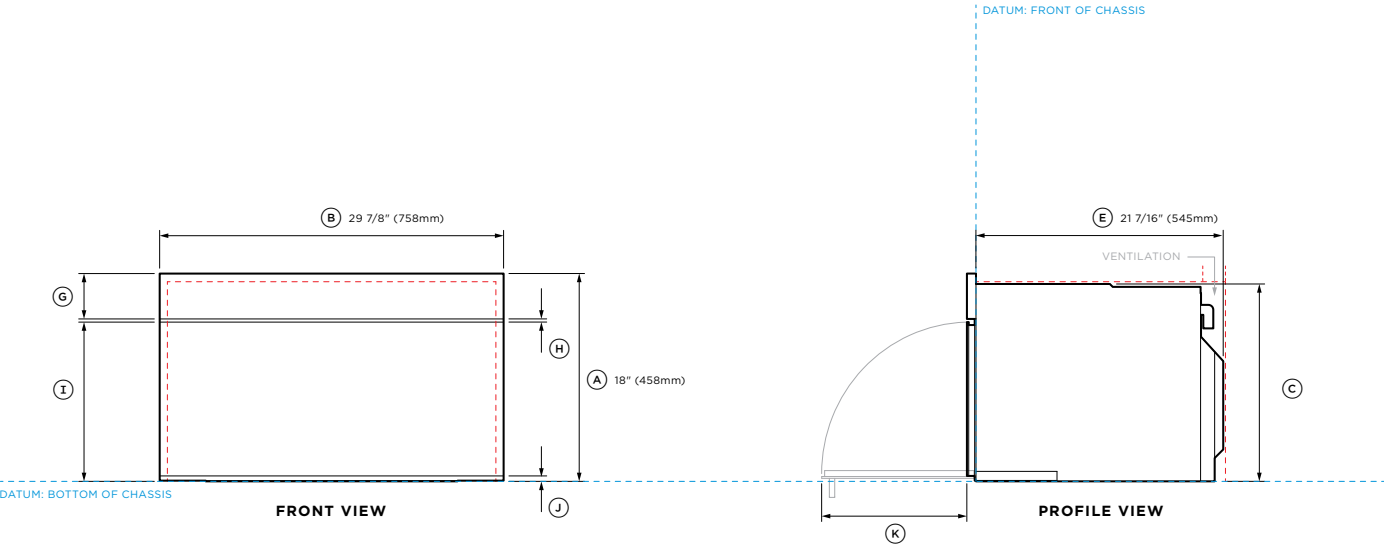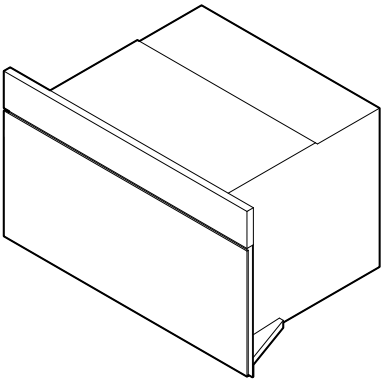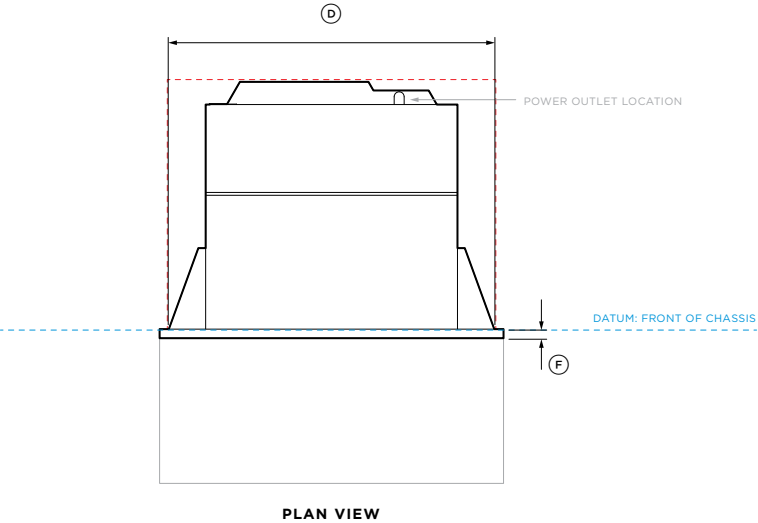

Model no:	
OM30NMUNB3	30" Series 9 Minimal Handleless Compact Convection-Speed Oven - Black
OM30NMUNG3	30" Series 9 Minimal Handleless Compact Convection-Speed Oven - Grey

Product Dimensions	inch	mm
A Overall height of product	18	458
B Overall width of product	29 7/8	758
C Height of chassis	17 1/8	435
D Width of chassis	28 3/8	720
E Depth of chassis	21 7/16	545
F Thickness of control panel	13/16	20
G Height of control panel	3 15/16	100
H Gap between door and control panel	9/32	7
I Height from bottom datum to top of door	13 13/16	351
J Visual gap height	15/32	12
K Depth with door fully open*	12 5/8	320

*Measured from front of control panel.


Minimum Clearances	inch	mm
Minimum inside height of cavity	17 5/16	440
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	21 5/8	550
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560
Minimum clearance above products control panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	18 1/8	460
Recommended cabinet width	30	762

*Measured from front of chassis.

**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

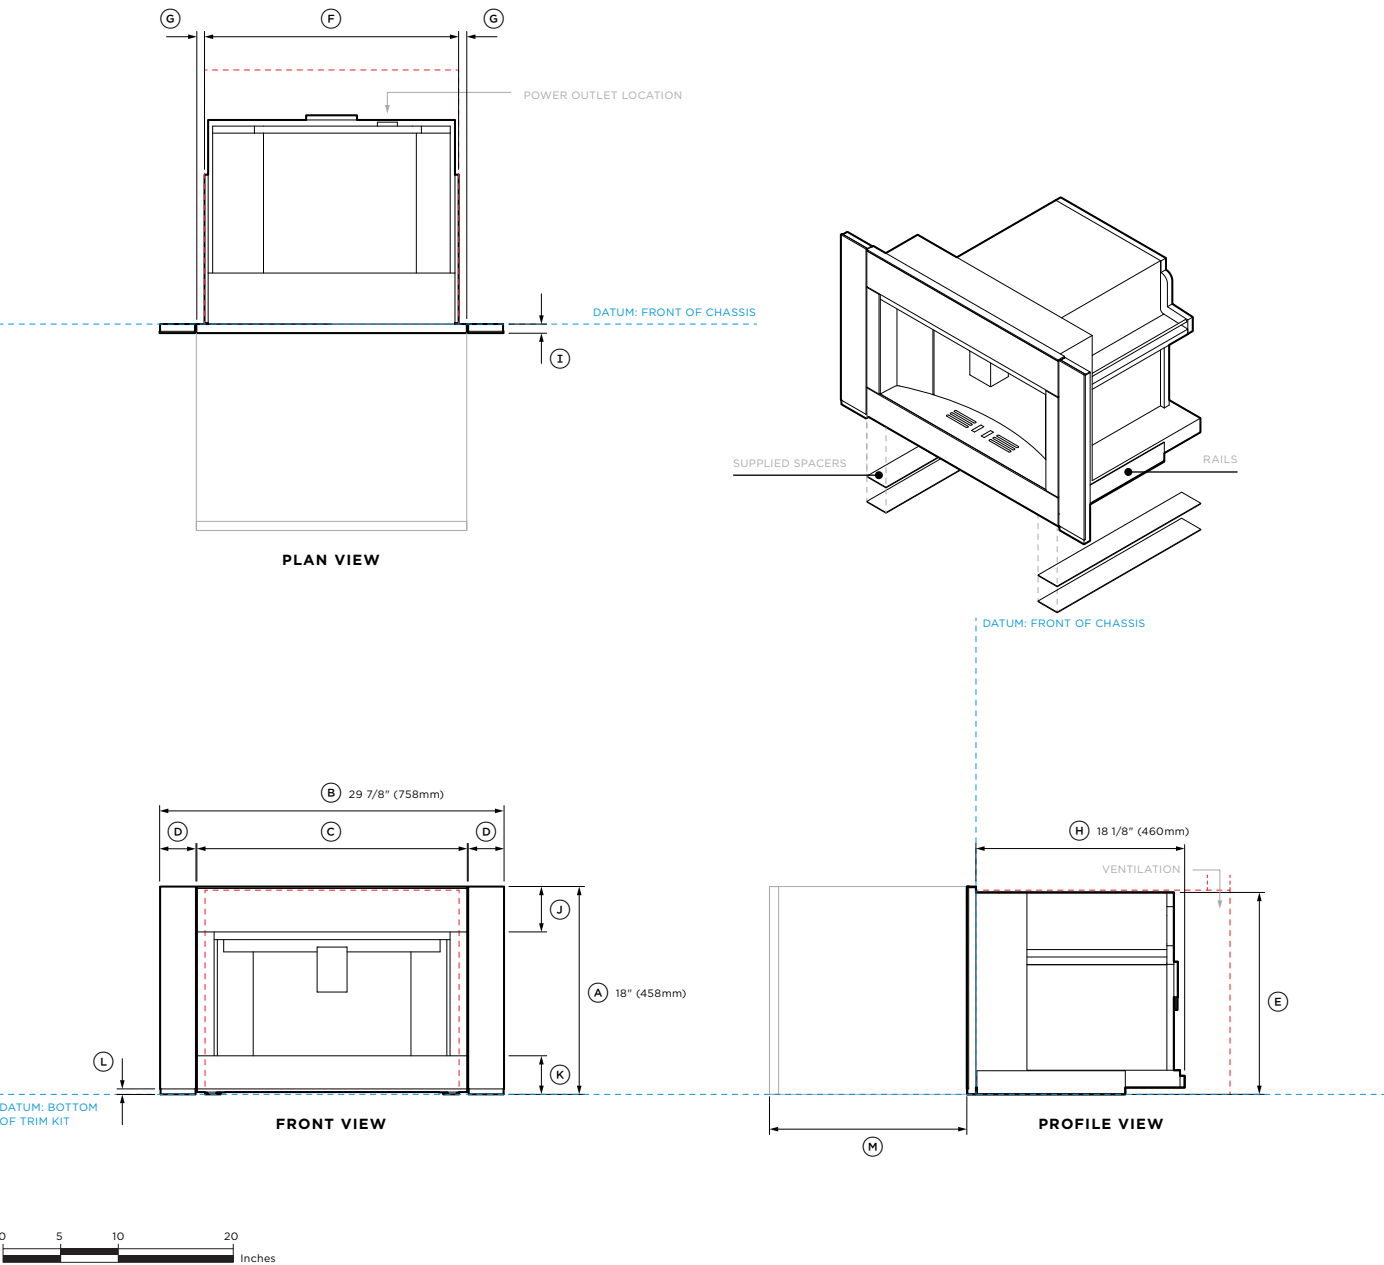


Model no:		
EB30MSB3	30" Series 9 Minimal Built-in Coffee Maker - Black	

Product Dimensions		inch	mm
A	Overall height of product	18	458
B	Overall width of product	29 7/8	758
C	Width of built-in coffee maker	23 15/32	596
D	Width of trim kit	3 1/8	79
E	Height of chassis	17 1/2	445
F	Width of chassis	22 1/16	560
G	Distance from side of chassis to front panel	23/32	18
H	Depth of chassis	18 1/8	460
I	Thickness of control panel	13/16	20
J	Height of control panel	3 15/16	100
K	Height of horizontal lower section from bottom datum	3 11/32	85
L	Visual gap height	15/32	12
M	Depth of built-in coffee maker fully pulled out*	17 1/8	435
*Measured from front of control panel.			
Minimum Clearances		inch	mm
Minimum inside height of cavity		17 3/4	450
Minimum inside width of cavity*		22 1/16	560
Minimum inside depth of cavity**		22 1/16	560
Rear ventilation height***		2	50
Rear ventilation width***		22 1/16	560
Minimum clearance above products control panel to upper cabinetry front panel or appliance		1/16	2
Minimum clearance between adjacent front panel or appliance		1/16	2
Recommended cabinet height		18 1/8	460
Recommended cabinet width		30	762

*Cabinetry requires additional vertical sidewalls to secure the product.
**Measured from front of chassis.
***A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

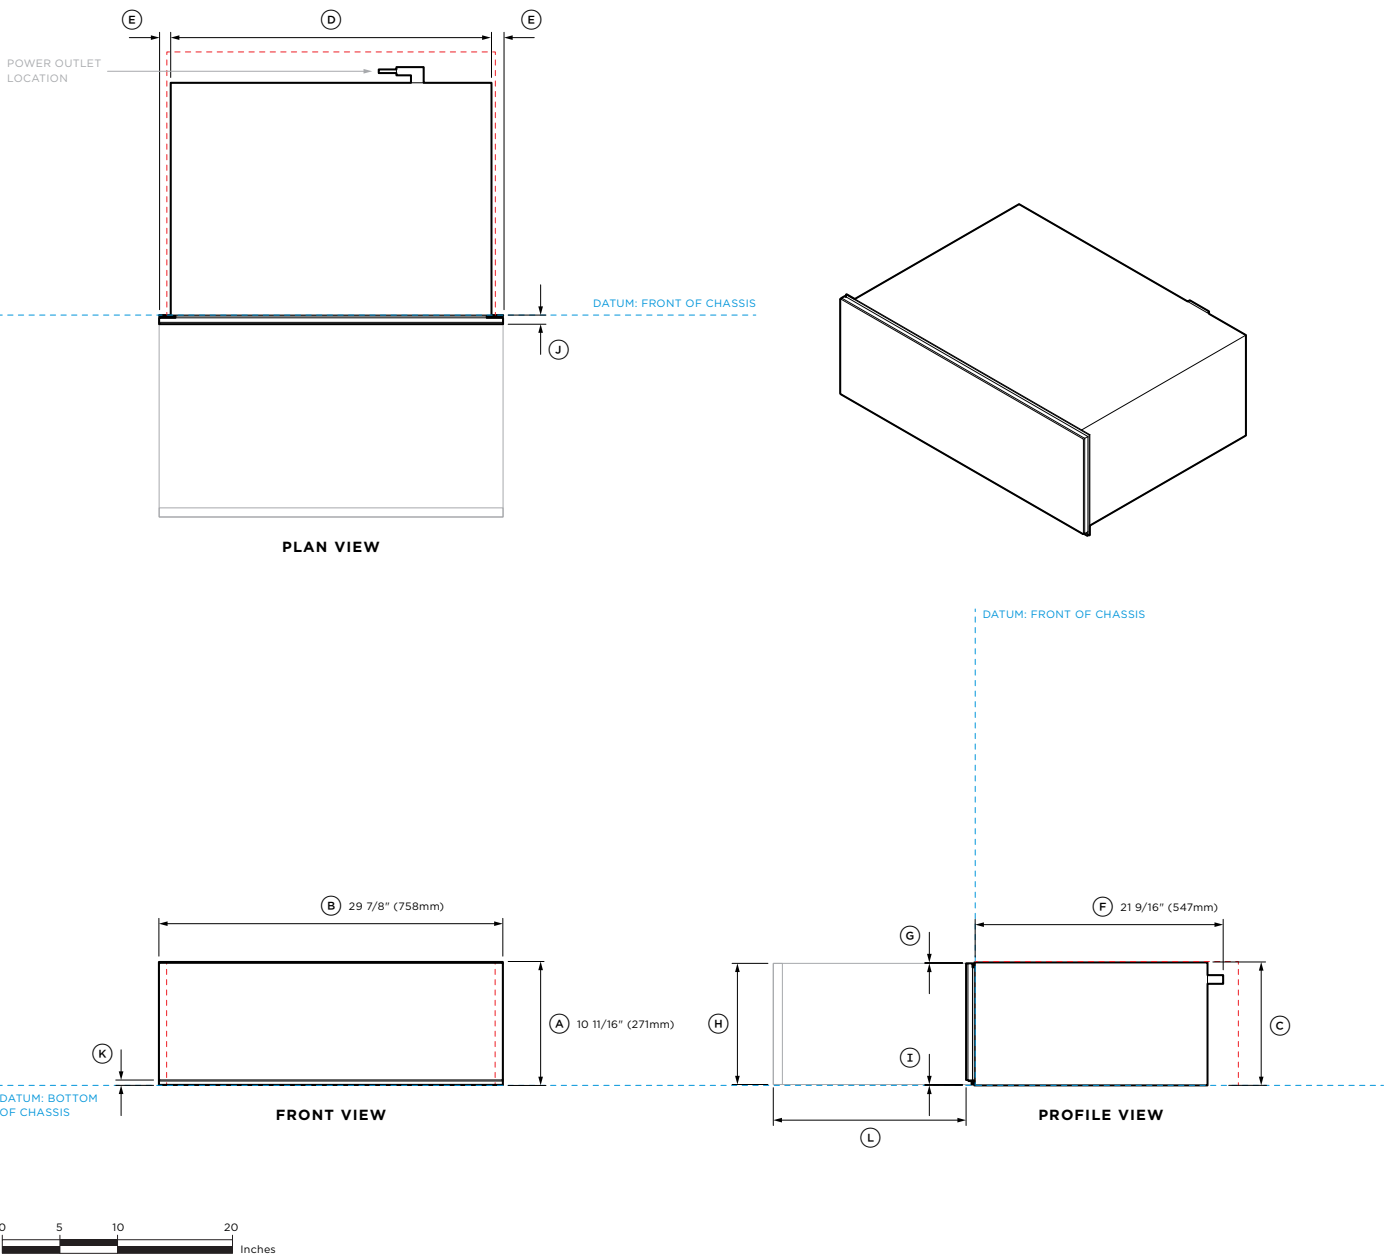

Model no:		
WB30SMB3	30" Series 9 Minimal Warming Drawer - Black	
WB30SMG3	30" Series 9 Minimal Warming Drawer - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Height of chassis	10 11/16	271
(D) Width of chassis	27 3/4	704
(E) Distance from side of chassis to front panel	1	25.5
(F) Depth of chassis (including power plug)	21 9/16	547
(G) Height from top of front panel to top of chassis	1/16	2
(H) Height of front panel	10 1/2	267
(I) Height from bottom datum to bottom of front panel	1/16	2
(J) Thickness of front panel	13/16	20
(K) Visual gap height	15/32	12
(L) Depth of drawer open*	16 3/4	425

*Measured from front of front panel.


Minimum Clearances	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity	28 1/2	724
Minimum inside depth of cavity*	22 13/16	580
Minimum clearance above products front panel to upper cabinetry front panel or appliance**	5/32	4
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762

*Measured from front of chassis.
**Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

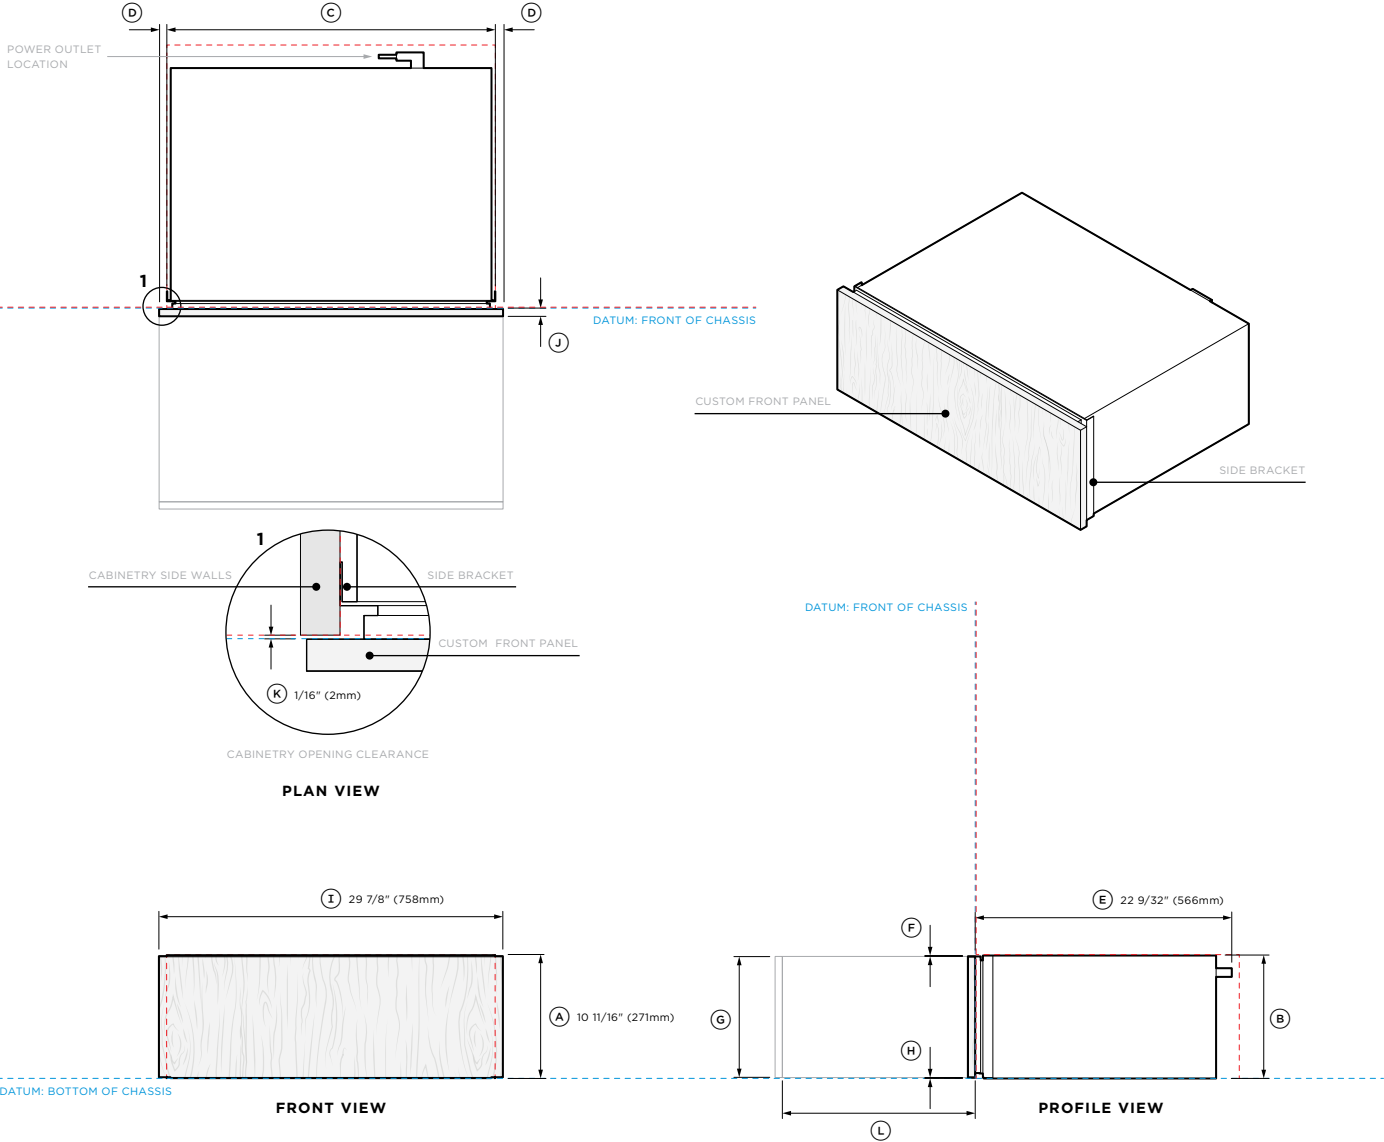

Model no:		
WB30SDEI3	30" Series 9 Integrated Warming Drawer	

Product Dimensions		inch	mm
A	Overall height of product	10 11/16	271
B	Height of chassis	10 11/16	271
C	Width of chassis (including side bracket)	28 15/32	723
D	Distance from side bracket to custom front panel	11/16	17
E	Depth of chassis (including power plug)	22 9/32	566
F	Height from top of custom front panel to top of chassis	1/16	2
G	Height of custom front panel	min 10 1/2	min 267
H	Height from bottom datum to bottom of custom front panel	1/16	2
I	Width of custom front panel	min 29 7/8	min 758
J	Thickness of custom front panel	min 5/8	min 16
K	Clearance behind custom front panel for push-to-open mechanism*	1/16	2
L	Depth of drawer open**	16 3/4	425


*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).
**Measured from front of chassis.
Note: Maximum custom front panel weight 11 lb (5kg).

Minimum Clearances		inch	mm
Minimum inside height of cavity		10 3/4	273
Minimum inside width of cavity		28 1/2	724
Minimum inside depth of cavity*		22 13/16	580
Minimum clearance above product custom front panel to upper cabinetry front panel or appliance		1/16	2
Minimum clearance between adjacent front panel or appliance		1/16	2
Recommended cabinet height		10 3/4	273
Recommended cabinet width		30	762

*Measured from front of chassis.
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

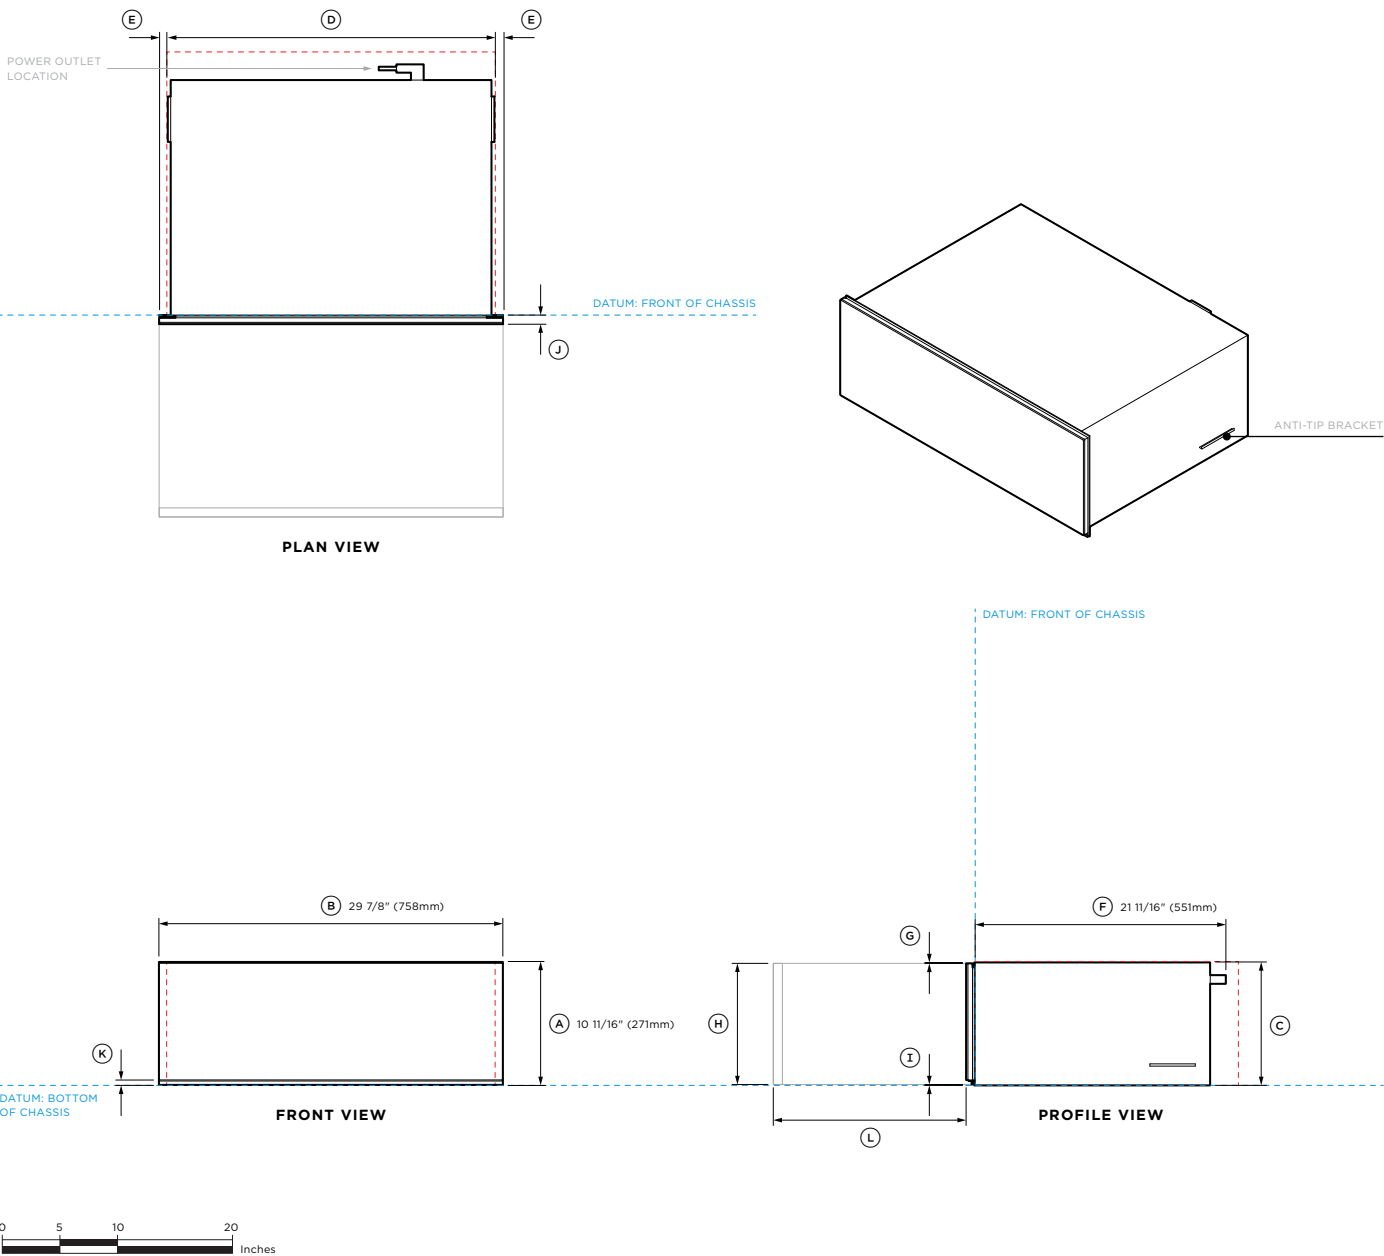

Model no:		
VB30SMB3	30" Series 9 Minimal Vacuum Seal Drawer - Black	
VB30SMG3	30" Series 9 Minimal Vacuum Seal Drawer - Grey	

Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Height of chassis	10 11/16	271
(D) Width of chassis*	27 3/4	704
(E) Distance from side of chassis to front panel	11/16	17
(F) Depth of chassis (including power plug)	21 11/16	551
(G) Height from top of front panel to top of chassis	1/16	2
(H) Height of front panel	10 1/2	267
(I) Height from bottom datum to bottom of front panel	1/16	2
(J) Thickness of front panel	13/16	20
(K) Visual gap height	15/32	12
(L) Depth of drawer open**	16 3/4	425

*Including anti-tip brackets.
**Measured from front of front panel.


Minimum Clearances	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity*	28 1/2	724
Minimum inside depth of cavity**	22 13/16	580
Minimum clearance above products front panel to upper cabinetry front panel or appliance***	5/32	4
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762

*Including anti-tip brackets.
**Measured from front of chassis.
***Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.

Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

----- INDICATES PRODUCT DATUM
----- INDICATES CABINETRY CLEARANCES

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](https://www.fisherpaykel.com)

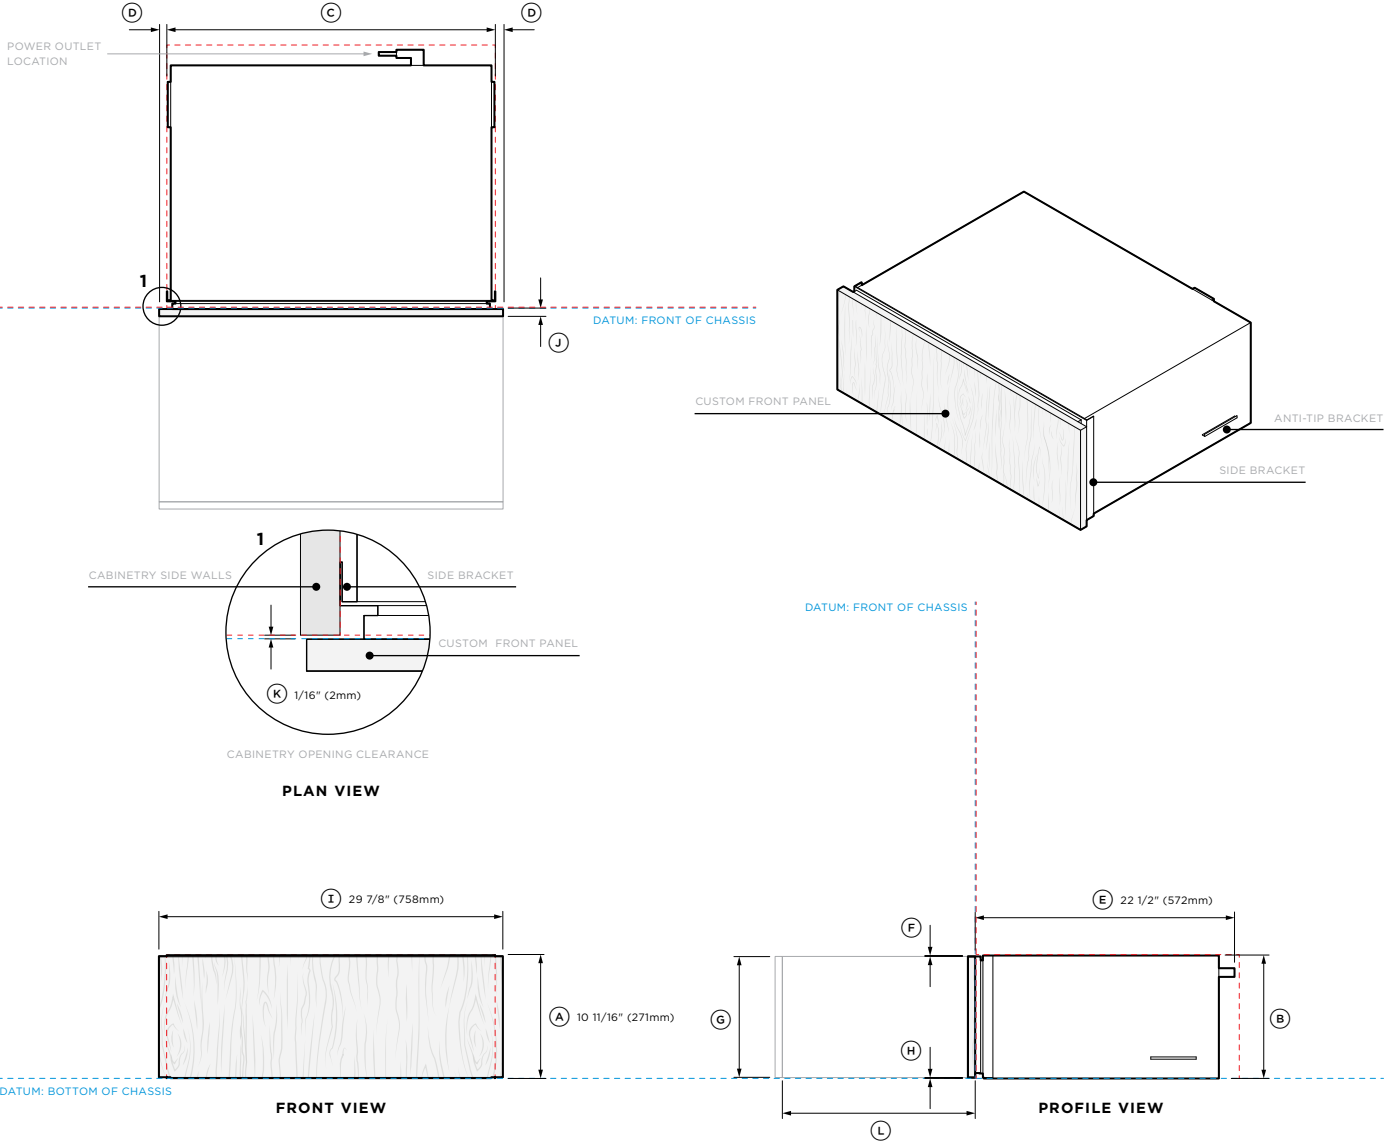

Model no:		
VB30SDEI3 30" Series 9 Integrated Vacuum Seal Drawer		
Product Dimensions		
	inch	mm
(A) Overall height of product	10 11/16	271
(B) Height of chassis	10 11/16	271
(C) Width of chassis (including side bracket)*	28 15/32	723
(D) Distance from side bracket to custom front panel	11/16	17
(E) Depth of chassis (including power plug)	22 1/2	572
(F) Height from top of custom front panel to top of chassis	1/16	2
(G) Height of custom front panel	min 10 1/2	min 267
(H) Height from bottom datum to bottom of custom front panel	1/16	2
(I) Width of custom front panel	min 29 7/8	min 758
(J) Thickness of custom front panel	min 5/8	min 16
(K) Clearance behind custom front panel for push-to-open mechanism**	1/16	2
(L) Depth of drawer open***	16 3/4	425
*Including anti-tip brackets.		
**A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
***Measured from front of chassis.		
Note: Maximum custom front panel weight 11 lb (5kg).		
Minimum Clearances		
	inch	mm
Minimum inside height of cavity	10 3/4	273
Minimum inside width of cavity*	28 1/2	724
Minimum inside depth of cavity**	22 13/16	580
Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
Minimum clearance between adjacent front panel or appliance	1/16	2
Recommended cabinet height	10 3/4	273
Recommended cabinet width	30	762
*Including anti-tip brackets.		
**Measured from front of chassis.		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		
----- INDICATES PRODUCT DATUM		
----- INDICATES CABINETRY CLEARANCES		
IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com		

PLANNING CONSIDERATIONS

DIVIDING SHELF

If the appliance front panel is thicker than the cabinetry front panel, adjust the dividing shelf depth to ensure the oven sits flush with the front of the cabinetry.

BLACK CLASHING



Black clashing is recommended on front facing edges and openings where products are located and on side cabinets if cabinet is rebated.

OVEN CABINETRY TRIM

If using light-colored cabinets, we recommend using black cabinetry trim to help hide the cabinetry beneath the front door panel of the appliance. Ensure the trim height does not interfere with any appliances or cabinetry below. Black cabinetry trim is included with ovens.

LEVEL CABINETRY


Check the shelves are level and the side panels are straight.

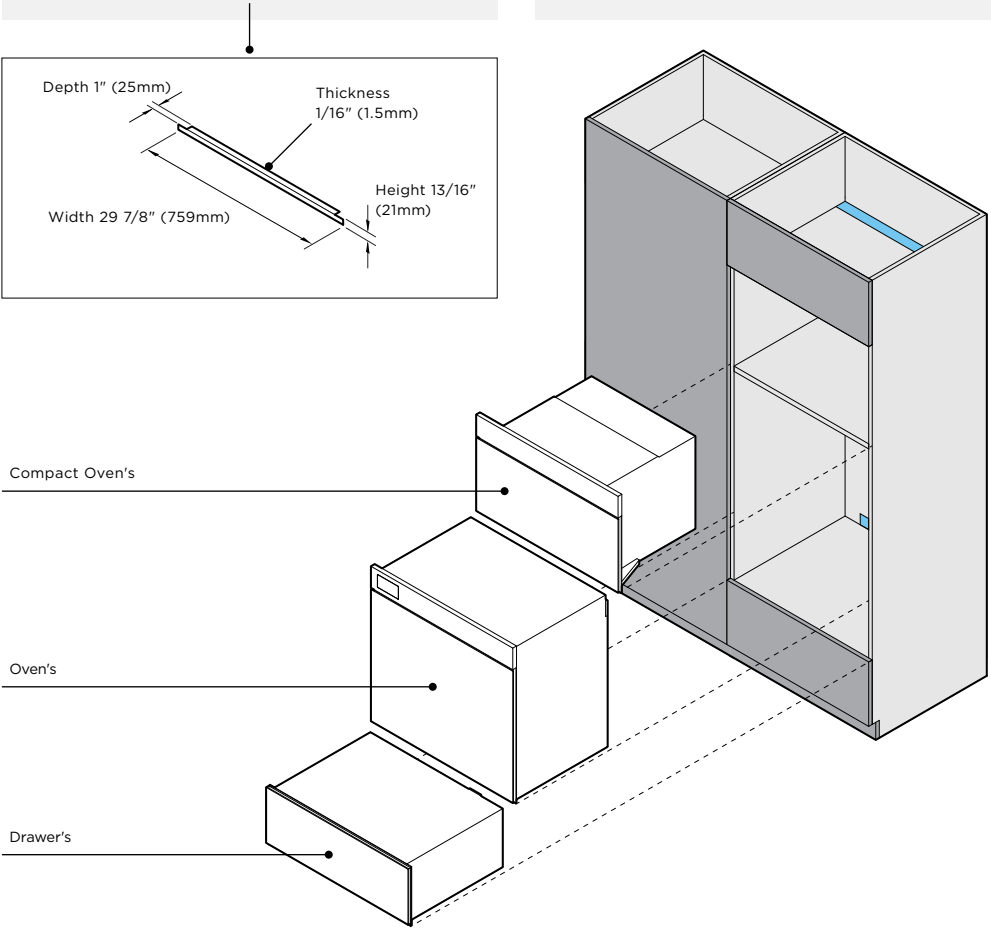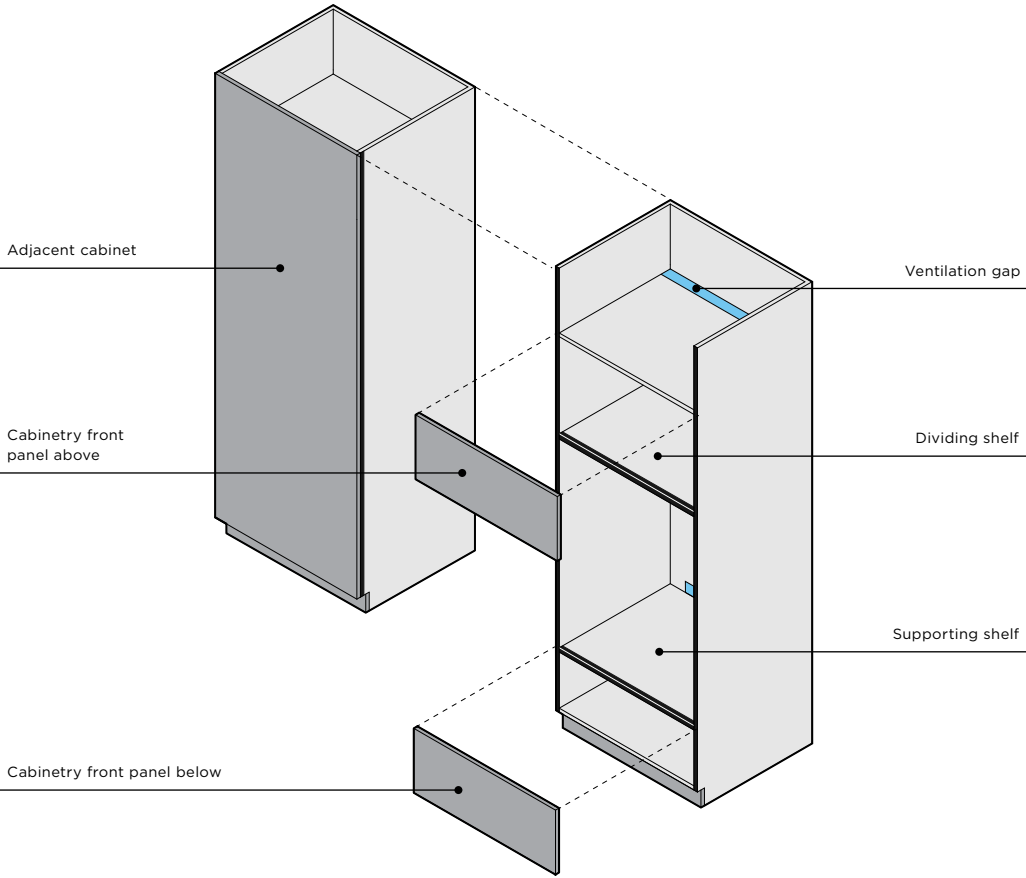

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)


UNDERBENCH

If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

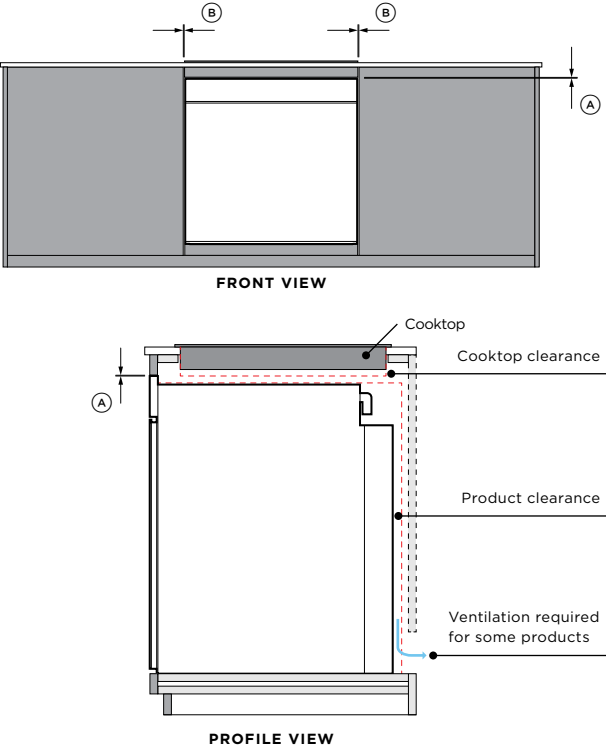


SINGLE INSTALLATION

Head to the individual product 'Cabinetry' section in this Planning Guide for details.

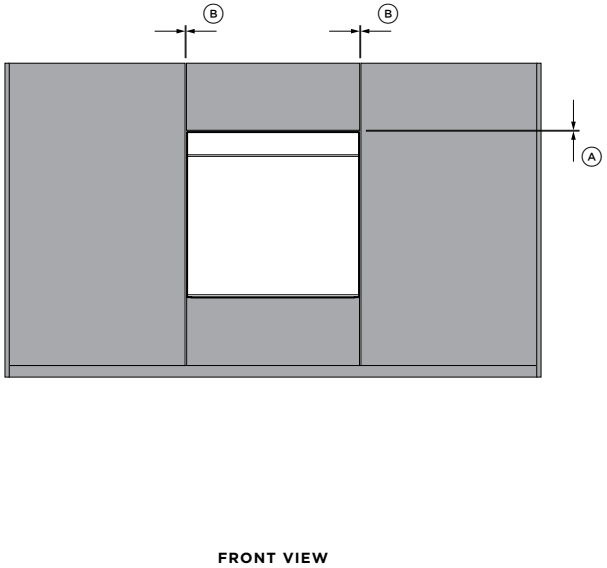


STACKED OR GRID

Head to the 'Stack Height' section in this Planning Guide for details.

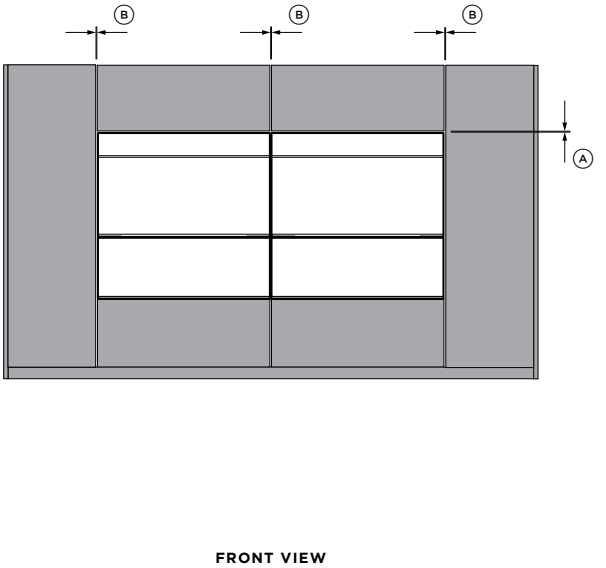

Clearances		inch	mm
A	Minimum clearance above product control panel/front panel to upper cabinetry front panel or appliance	1/16	2
B	Minimum clearance between adjacent front panel or appliance	1/16	2

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

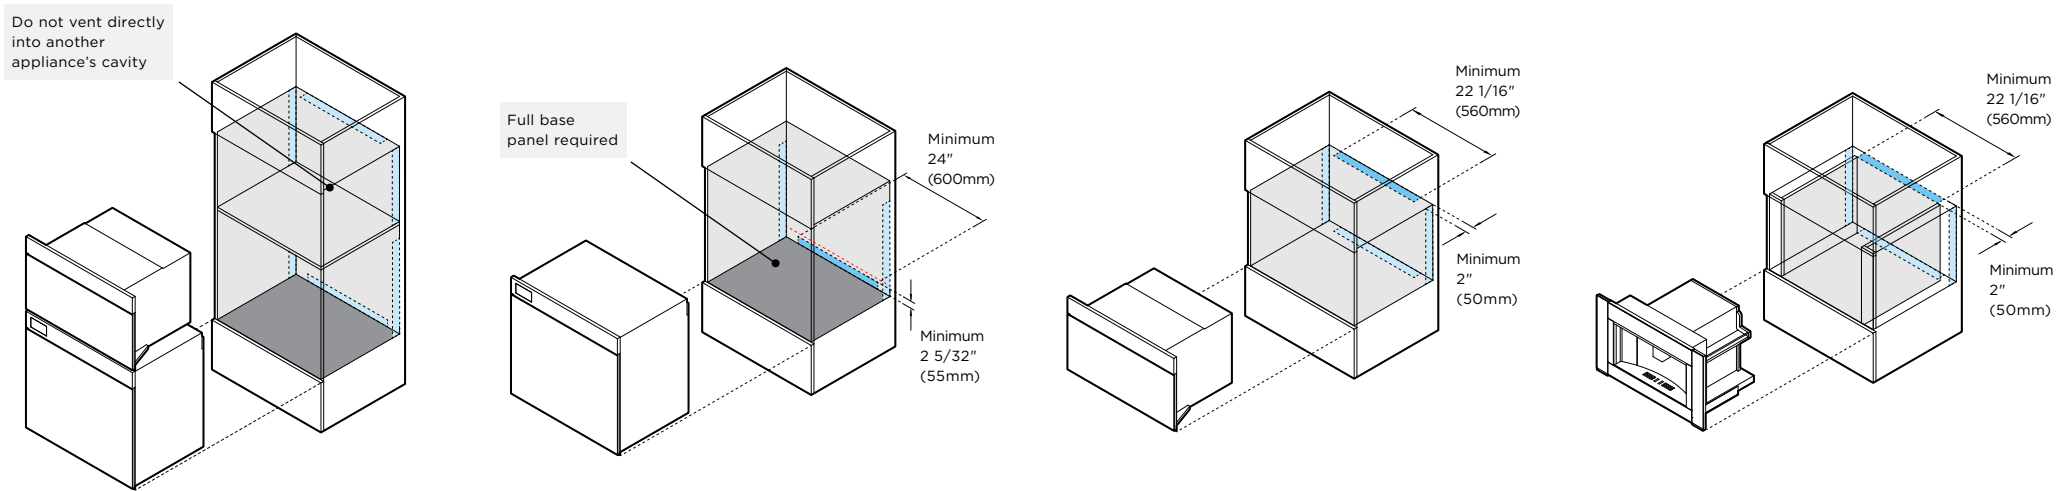

Options for total minimum ventilation area

VENTILATION

Ventilation is required to ensure proper performance of certain products.

Possible Venting Locations:

- Space behind the cabinet
- Upper cavity (not a product cavity)
- Toe kick cavity
- Adjacent cabinetry (not a product cavity)

Cabinet with back panel or installed against a wall:
Select one of the venting locations listed above, providing the required minimum ventilation area.

Cabinet without back panel:
If the cabinet is manufactured without a back panel and is not positioned directly against a wall, the open back will provide sufficient ventilation.

Do not vent directly into another appliance's cavity.

SELF-CLEANING OVEN AND
SELF-CLEANING STEAM ASSIST OVEN

OB30SMPUNB3, OB30SMPUNG3, OB30SMPSUNB3,
OB30SMPSUNG3

VENTILATION PLACEMENT

	51in ² (330cm ²)
	or
Total minimum ventilation area	2 5/32" x 24" (55mm x 600mm)

Cavity venting options*	sides or back
-------------------------	---------------

*If positioned at the back, it should be located no more than 3 5/32" (80mm) above the bottom of the chassis datum.

Note: Full base panel required for product to operate correctly. Venting can not be through the base panel.

COMPACT CONVECTION-SPEED OVEN

OM30NMUNB3, OM30NMUNG3

VENTILATION PLACEMENT

	43.4in ² (280cm ²)
	or
Total minimum ventilation area	2" x 22 1/16" (50mm x 560mm)

Cavity venting options	base, sides or top
------------------------	--------------------

BUILT-IN COFFEE MAKER

EB30MSB3

VENTILATION PLACEMENT

	43.4in ² (280cm ²)
	or
Total minimum ventilation area	2" x 22 1/16" (50mm x 560mm)

Cavity venting options	base, sides or top
------------------------	--------------------

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

STACK HEIGHT

Stack height is overall product height with minimum clearance above appliance control panel or front panel.

(A) Overall product height

+

(B) Minimum clearance above appliance control panel or front panel to upper appliance

=

(C) Stacked Height

1

PROFILE VIEW

PROFILE VIEW

Dividing shelf location, shelf must be above min inside height of cavity.

PROFILE VIEW

Ventilation air vent is required at rear of cabinetry for some products.

Dividing shelves are required to support stacked appliances and to achieve correct clearance.

Dividing shelves must be constructed from material that will support the weight of the appliances. Ensure the oven is not bearing any weight from cabinetry or products installed above.

Drawers can fully support a 30inch Fisher & Paykel oven, without adding a shelf in between.

PROFILE VIEW

MINIMUM INSIDE HEIGHT OF CAVITY																						
	SELF-CLEANING OVEN		SELF-CLEANING STEAM ASSIST OVEN		COMBI-STEAM OVEN		COMPACT COMBI-STEAM OVEN		COMPACT CONVECTION-SPEED OVEN		BUILT-IN COFFEE MAKER		WARMING DRAWER		INTEGRATED WARMING DRAWER		VACUUM SEAL DRAWER		INTEGRATED VACUUM SEAL DRAWER			
	OB30SMPUNB3, OB30SMPUNG3		OB30SMPSUNB3, OB30SMPSUNG3		OS30SMUNB3, OS30SMUNG3		OS30NMUNB3, OS30NMUNG3		OM30NMUNB3, OM30NMUNG3		EB30MSB3		WB30SMB3, WB30SMG3		WB30SDEI3		VB30SMB3, VB30SMG3		VB30SDEI3			
DIMENSIONS	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm		
(A) Overall product height	28 11/16	729	28 11/16	729	23 9/16	598	18	458	18	458	18	458	10 11/16	271	10 11/16	271	10 11/16	271	10 11/16	271		
(B) Minimum clearance above	1/16	2	1/16	2	1/16	2	1/16	2	1/16	2	1/16	2	-	-	-	-	-	-	-	-		
(C) Stack height	28 3/4	731	28 3/4	731	24	600	18 1/8	460	18 1/8	460	18 1/8	460	10 11/16*	271*	10 11/16*	271*	10 11/16*	271*	10 11/16*	271*		
(D) Minimum inside height of cavity	28 1/32	712	28 1/32	712	22 13/16	580	17 5/16	440	17 5/16	440	17 3/4	450	-	-	-	-	-	-	-	-		

*Drawers can fully support 30inch Fisher & Paykel wall oven, without adding shelf in between. Note: Single installation of Drawers require minimum clearance above, head to individual product 'Cabinetry' section's of this Planning Guide for more details.

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

FISHER & PAYKEL

90004605C

PLANNING GUIDE 30" OVENS AND COMPANIONS VERSION C - OCTOBER 2025

© FISHER & PAYKEL APPLIANCES LIMITED 2025

PAGE 38

Model no:	
OB30SMPUNB3	330" Series 9 Minimal Handleless Self-Cleaning Oven - Black
OB30SMPUNG3	30" Series 9 Minimal Handleless Self-Cleaning Oven - Grey

Product Dimensions	inch	mm
(A) Overall height of product	28 11/16	729
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel	13/16	20


Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	28 3/4	731
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	28 1/32	712
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	23 1/2	597
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600

*Measured from front of chassis.
**A minimum ventilation area of 51in² (330cm²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Note: Cabinetry requires a full base panel.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

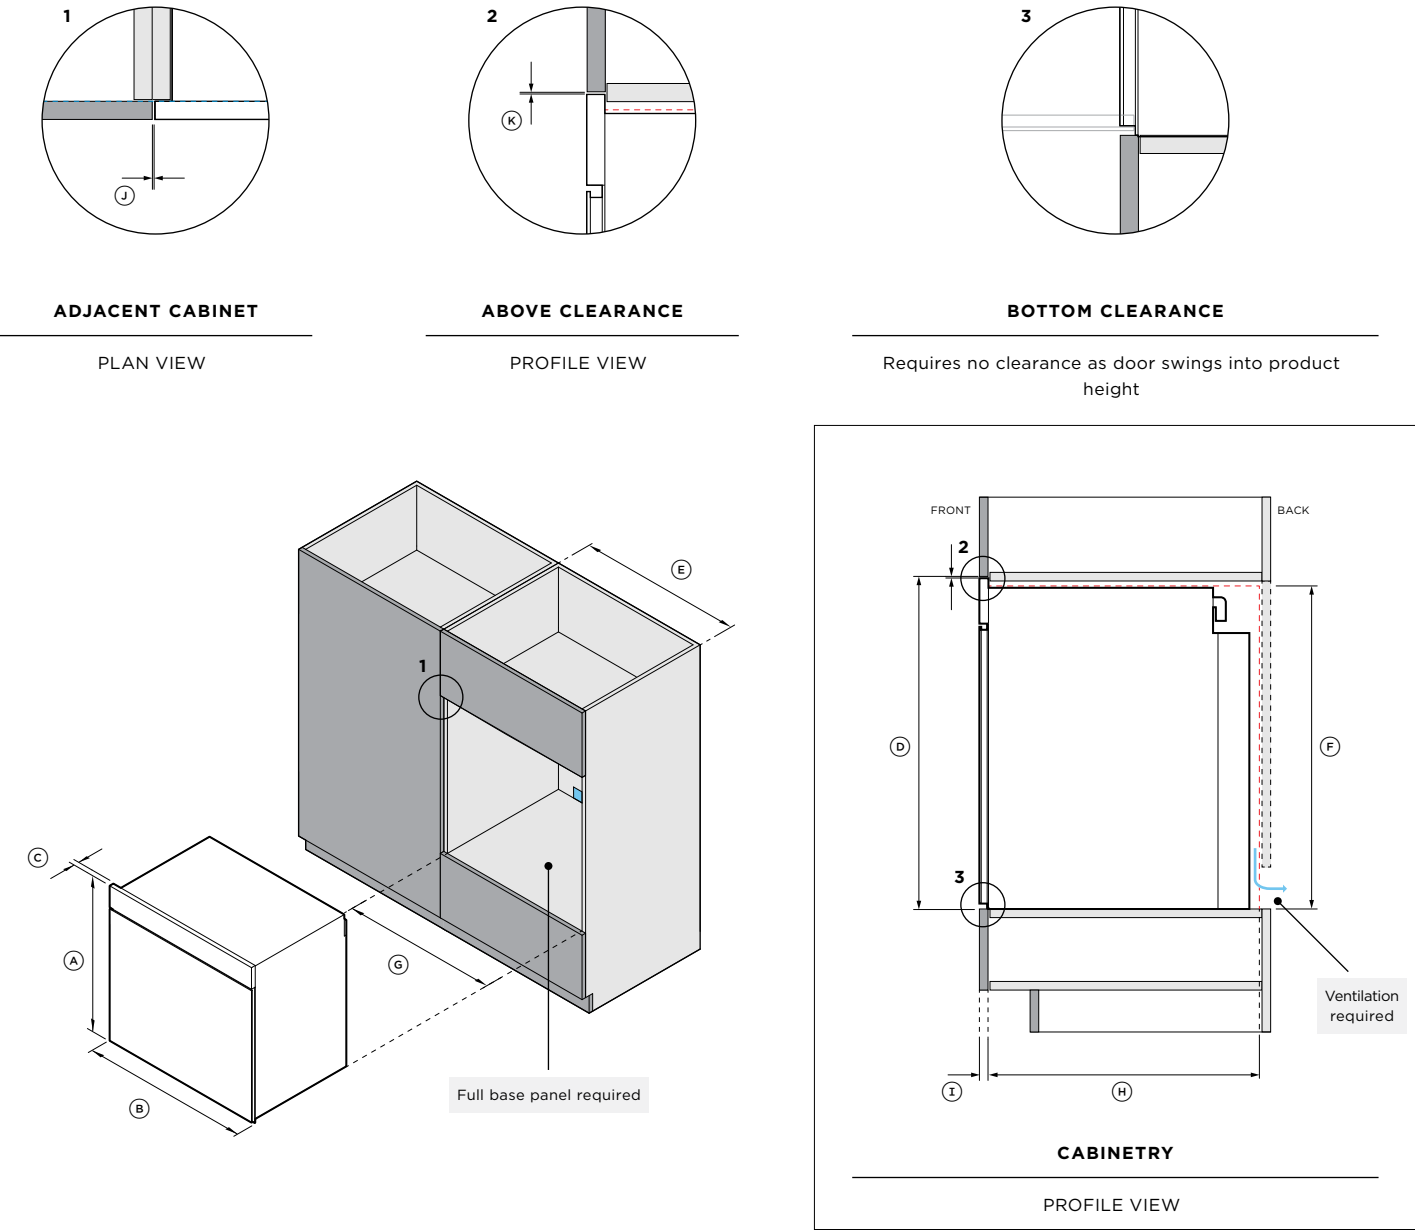

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:		
OB30SMPSUNB3	30" Series 11 Minimal Handleless Self-Cleaning Steam Assist Oven - Black	
OB30SMPSUNG3	30" Series 11 Minimal Self-Cleaning Steam Assist Oven - Grey	
Product Dimensions	inch	mm
Ⓐ Overall height of product	28 11/16	729
Ⓑ Overall width of product	29 7/8	758
Ⓒ Thickness of control panel	13/16	20
Cabinetry Dimensions	inch	mm
Ⓓ Recommended cabinet height/stack height	28 3/4	731
Ⓔ Recommended cabinet width	30	762
Ⓕ Minimum inside height of cavity	28 1/32	712
Ⓖ Minimum inside width of cavity	28 1/2	724
Ⓗ Minimum inside depth of cavity*	23 1/2	597
Ⓘ Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2 5/32	55
Rear ventilation width**	24	600
*Measured from front of chassis.		
**A minimum ventilation area of 51in ² (330cm ²), equivalent to 2" x 22 1/16" 2 5/32" x 24" (55mm x 600mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.		
Note: Cabinetry requires a full base panel.		
Cabinetry clearances	inch	mm
⓫ Minimum clearance between adjacent front panel or appliance	1/16	2
⓬ Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2
Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.		

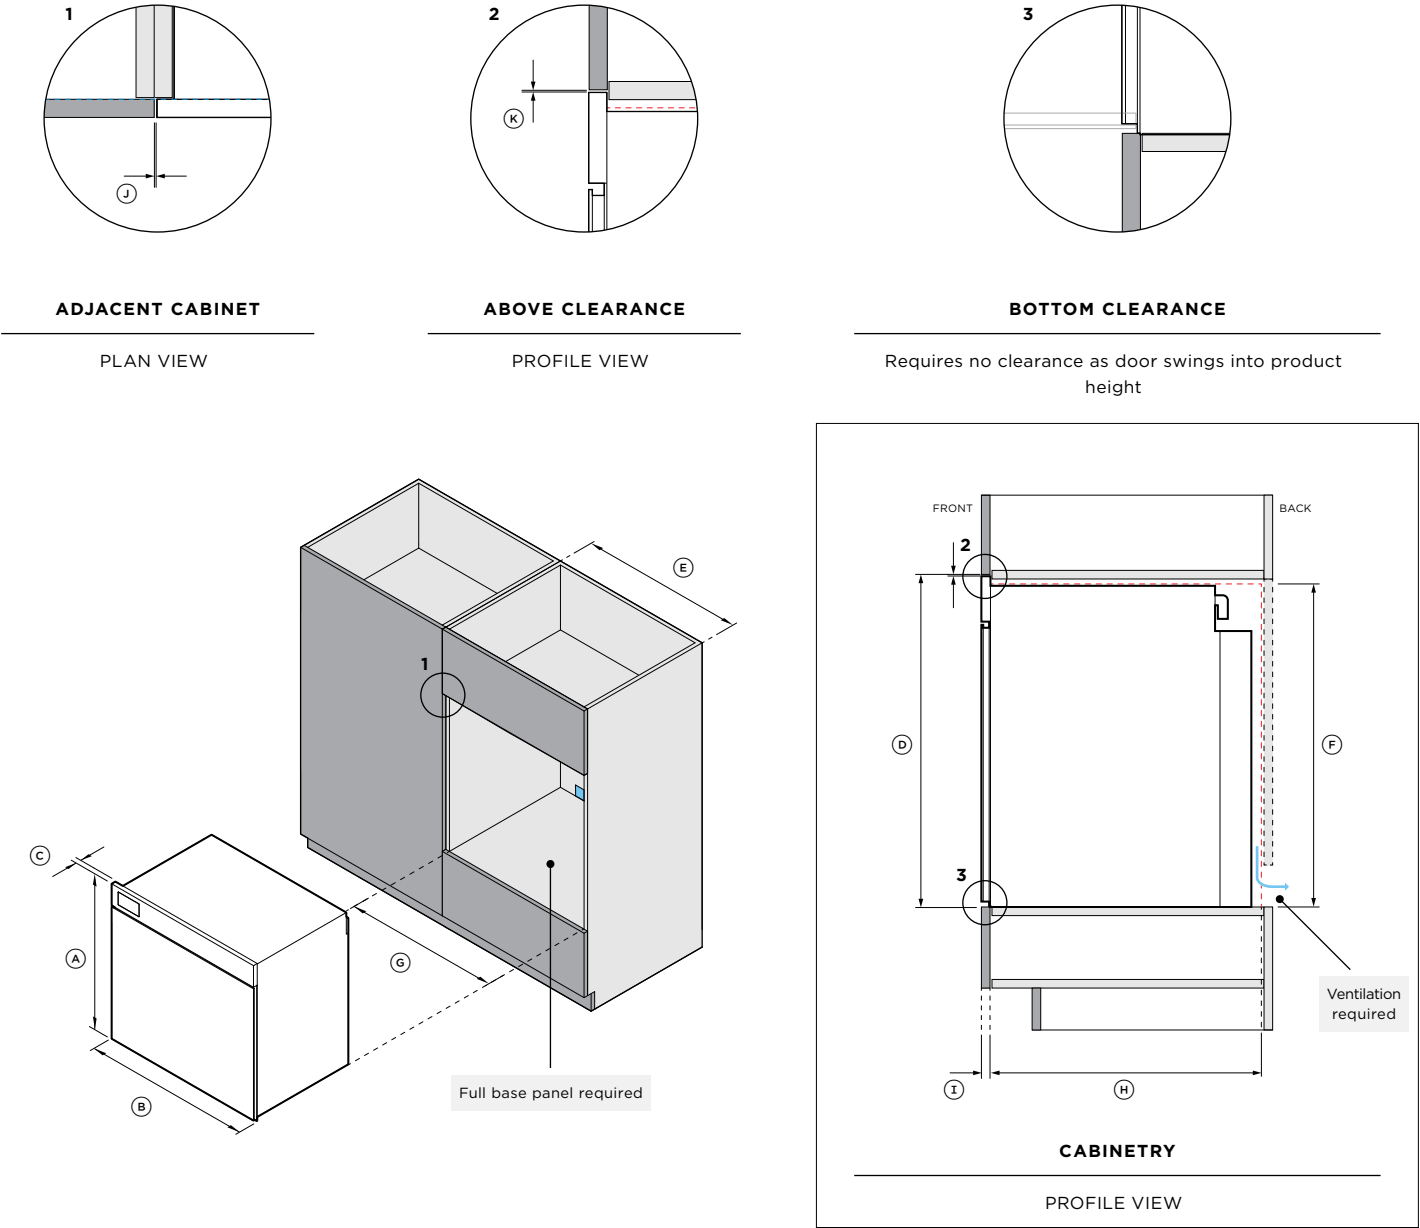

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:		
OS30SMUNB3	30" Series 11 Minimal Handleless Combi-Steam Oven - Black	
OS30SMUNG3	30" Series 11 Minimal Handleless Combi-Steam Oven - Grey	


Product Dimensions	inch	mm
(A) Overall height of product	23 9/16	598
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel	13/16	20

Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	24	600
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	22 13/16	580
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	21 5/8	550
(I) Thickness of cabinetry front panel	5/8-13/16	16-20

*Measured from front of chassis.


Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

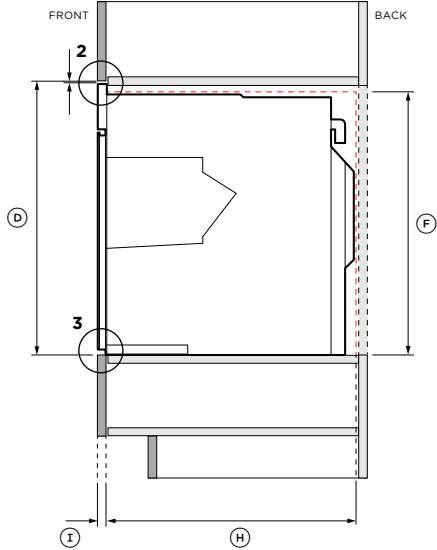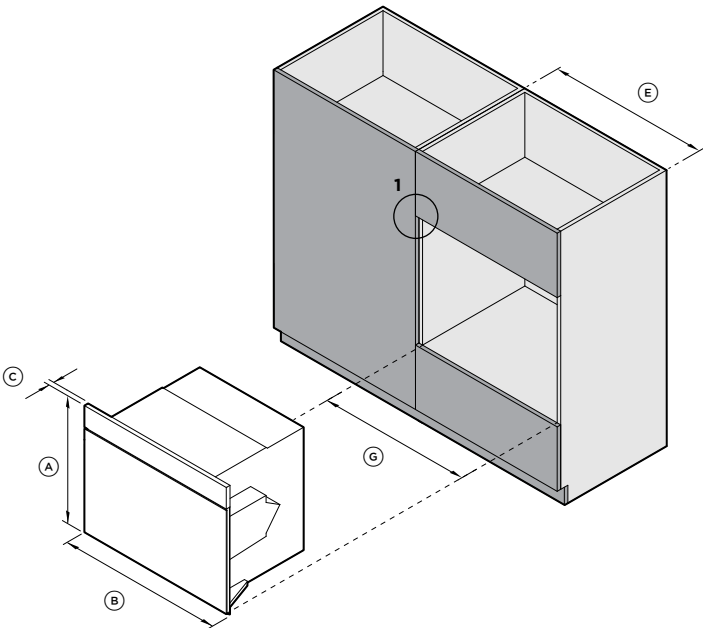

CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
OS30NMUNB3	30" Series 9 Minimal Handleless Compact Combi-Steam Oven - Black	
OS30NMUNG3	30" Series 9 Minimal Handleless Compact Combi-Steam Oven - Grey	


Product Dimensions	inch	mm
A Overall height of product	18	458
B Overall width of product	29 7/8	758
C Thickness of control panel	13/16	20

Cabinetry Dimensions	inch	mm
D Recommended cabinet height/stack height	18 1/8	460
E Recommended cabinet width	30	762
F Minimum inside height of cavity	17 5/16	440
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	21 5/8	550
I Thickness of cabinetry front panel	5/8-13/16	16-20

*Measured from front of chassis.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

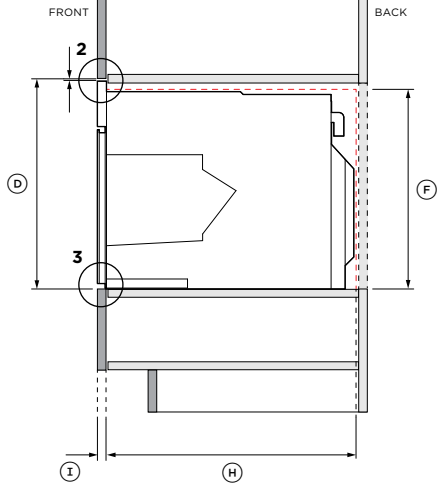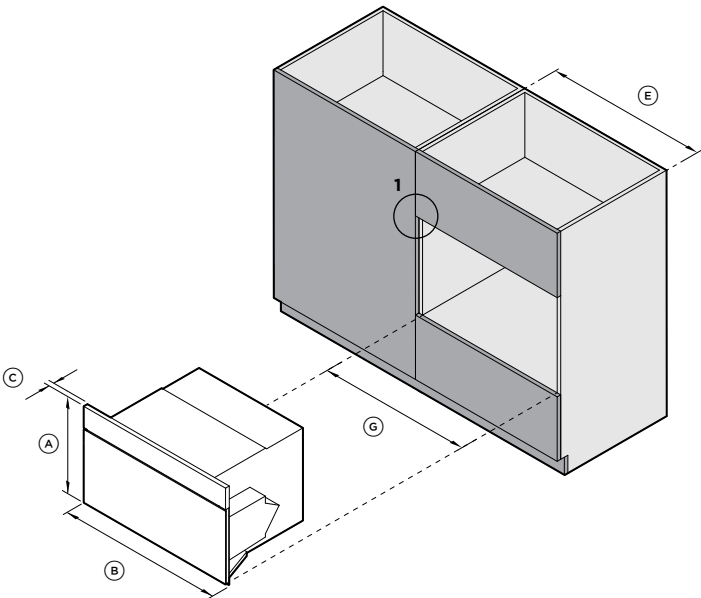

CABINETRY

PROFILE VIEW

Model no:	
OM30NMUNB3	30" Series 9 Minimal Handleless Compact Convection-Speed Oven - Black
OM30NMUNG3	30" Series 9 Minimal Handleless Compact Convection-Speed Oven - Grey


Product Dimensions	inch	mm
A Overall height of product	18	458
B Overall width of product	29 7/8	758
C Thickness of control panel	13/16	20

Cabinetry Dimensions	inch	mm
D Recommended cabinet height/stack height	18 1/8	460
E Recommended cabinet width	30	762
F Minimum inside height of cavity	17 5/16	440
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	21 5/8	550
I Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance as door swings into product height

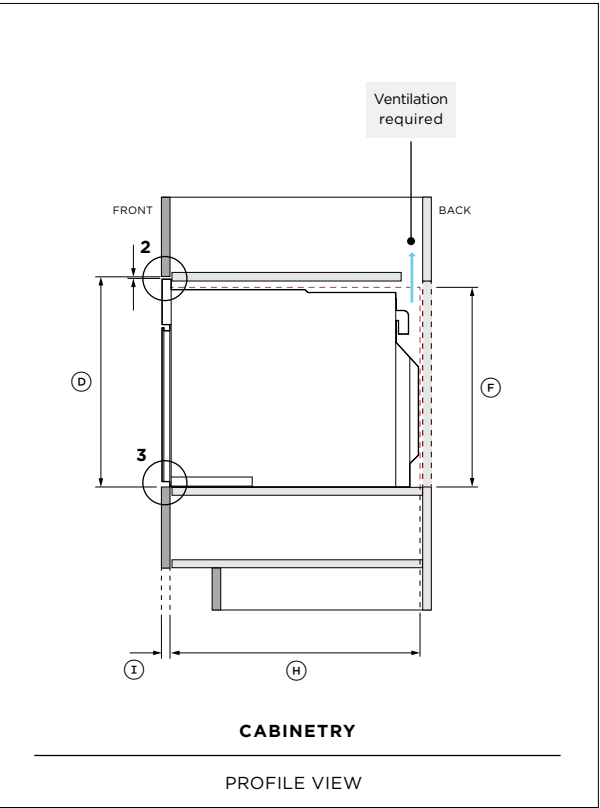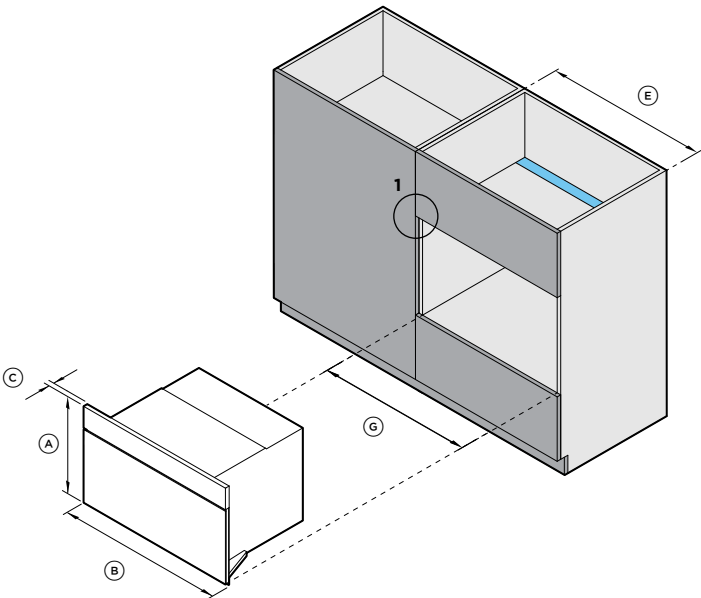


Model no:
EB30MSB3 30" Series 9 Minimal Built-in Coffee Maker - Black

Product Dimensions	inch	mm
(A) Overall height of product	18	458
(B) Overall width of product	29 7/8	758
(C) Thickness of control panel	13/16	20

Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height/stack height	18 1/8	460
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	17 3/4	450
(G) Minimum inside width of cavity	22 1/16	560
(H) Minimum inside depth of cavity*	22 13/16	545
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
Rear ventilation height**	2	50
Rear ventilation width**	22 1/16	560

*Measured from front of chassis.
**A minimum ventilation area of 43.4in² (280cm²), equivalent to 2" x 22 1/16" (50mm x 560mm), is required. For more information, refer to the 'Ventilation' section of this Planning Guide.

Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Minimum clearance above product control panel to upper cabinetry front panel or appliance	1/16	2

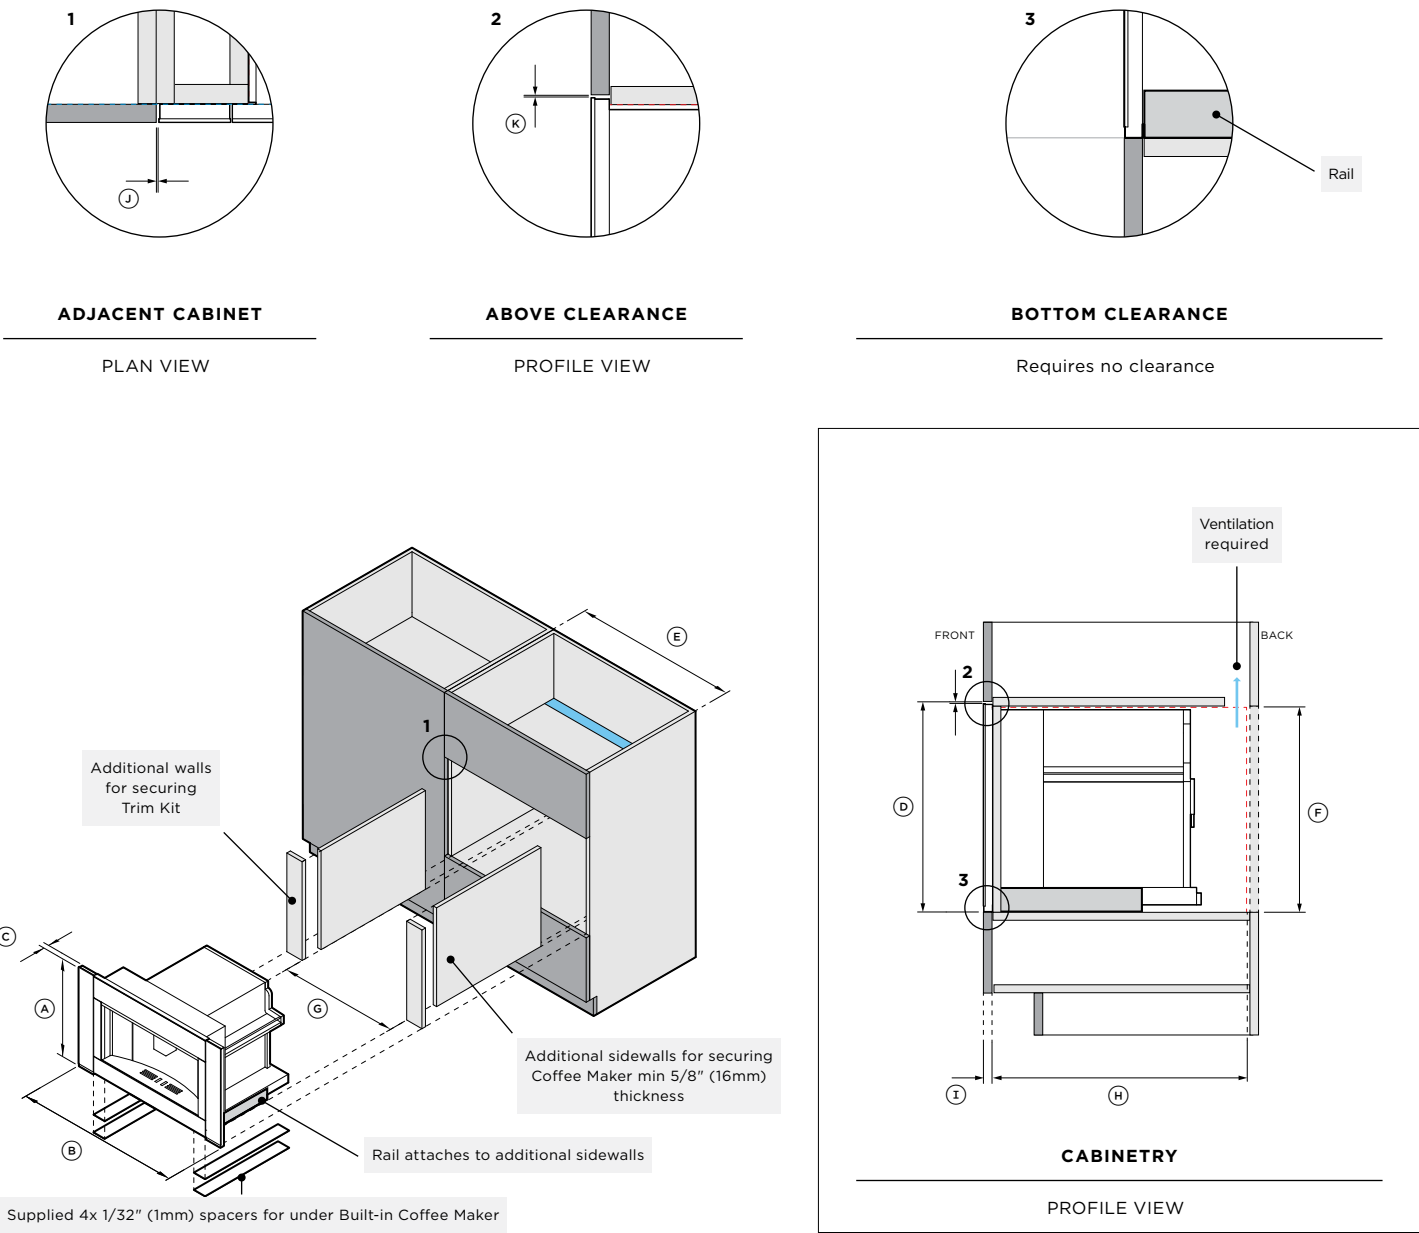

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
WB30SMB3	30" Series 9 Minimal Warming Drawer - Black	
WB30SMG3	30" Series 9 Minimal Warming Drawer - Grey	

Product Dimensions	inch	mm
A Overall height of product	10 11/16	271
B Overall width of product	29 7/8	758
C Thickness of front panel	13/16	20


Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

Cabinetry Dimensions	inch	mm
D Recommended cabinet height - single install	10 3/4	273
E Recommended cabinet width	30	762
F Minimum inside height of cavity	10 3/4	273
G Minimum inside width of cavity	28 1/2	724
H Minimum inside depth of cavity*	22 13/16	580
I Thickness of cabinetry front panel	5/8-13/16	16-20

*Measured from front of chassis.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above products front panel to upper cabinetry front panel or appliance*	5/32	4

*Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance

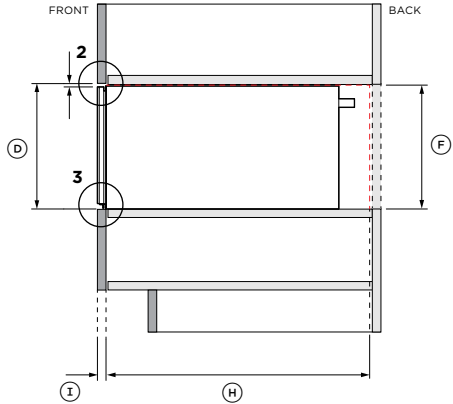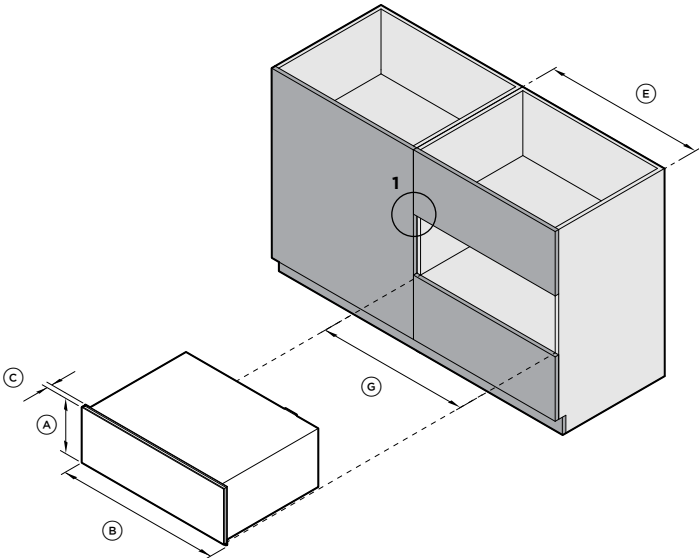


CABINETRY

PROFILE VIEW

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

Model no:		
WB30SDEI3 30" Series 9 Integrated Warming Drawer		
Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of custom front panel	min 5/8	min 16
Note: Maximum custom front panel weight 11 lb (5kg).		
Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity	28 1/2	724
(H) Minimum inside depth of cavity*	22 13/16	580
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
*Measured from front of chassis.		
Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Clearance behind custom front panel for push-to-open mechanism*	1/16	2
(L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		

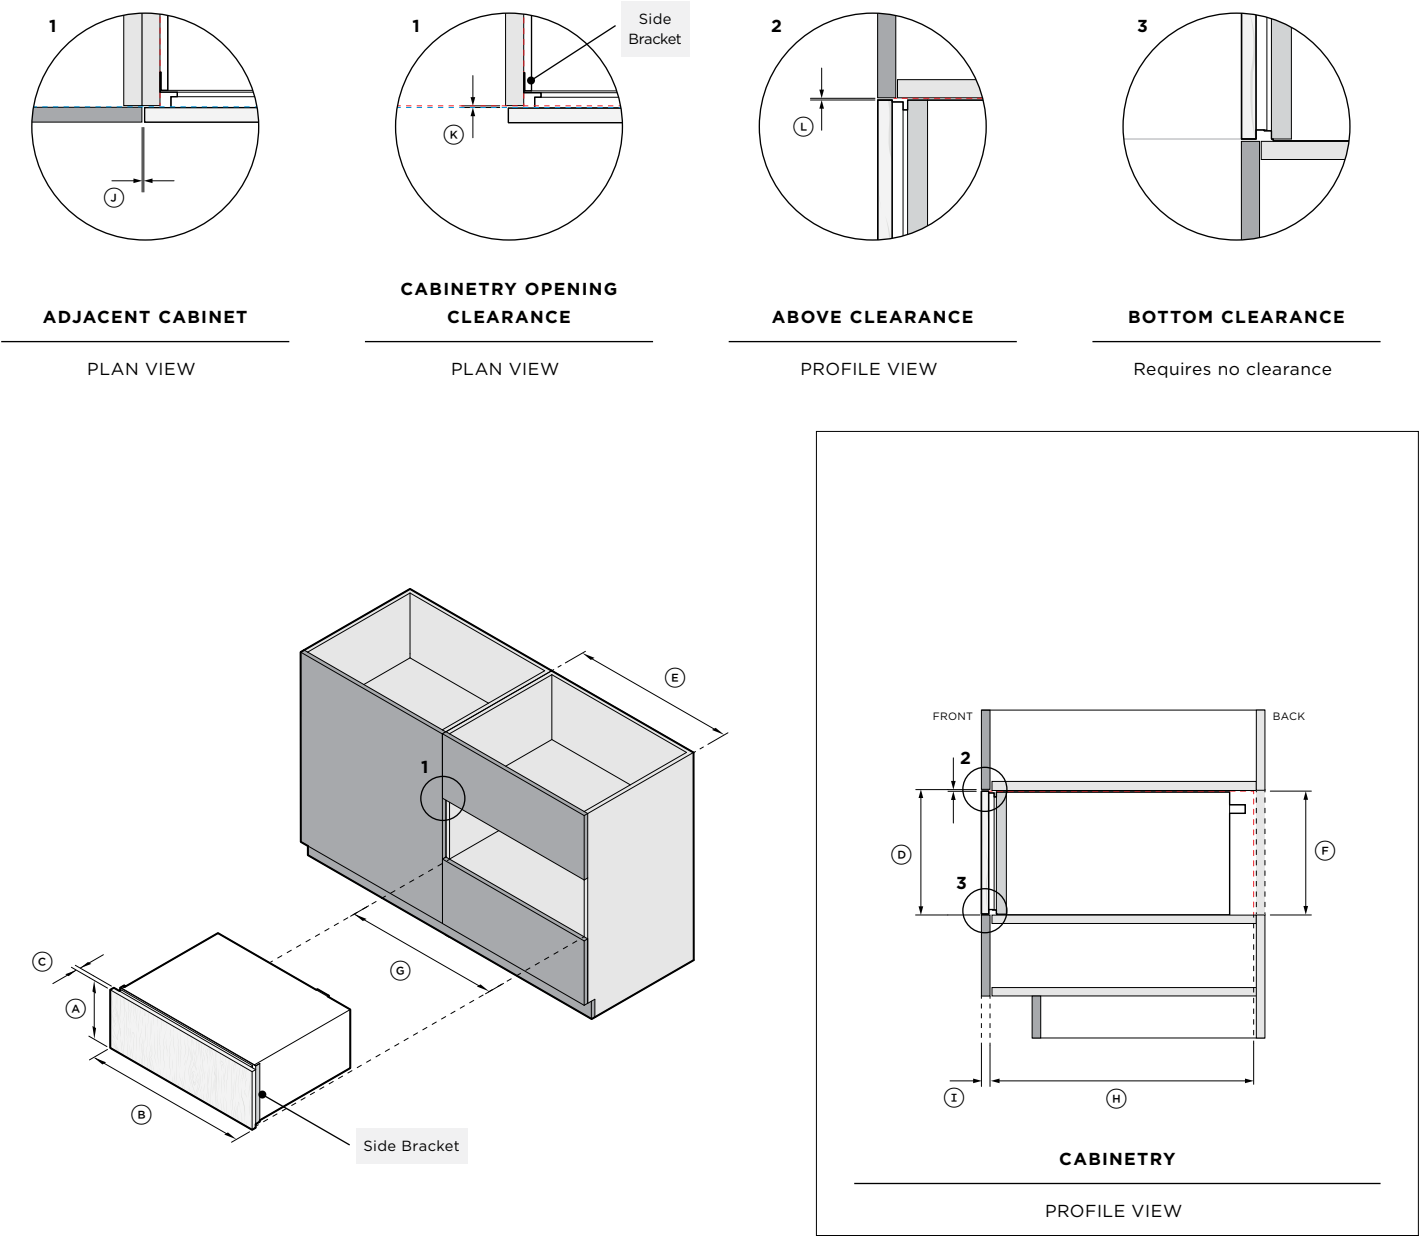

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
VB30SMB3	30" Series 9 Minimal Vacuum Seal Drawer - Black	
VB30SMG3	30" Series 9 Minimal Vacuum Seal Drawer - Grey	

Product Dimensions	inch	mm
A Overall height of product	10 11/16	271
B Overall width of product	29 7/8	758
C Thickness of front panel	13/16	20


Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.

Cabinetry Dimensions	inch	mm
D Recommended cabinet height - single install	10 3/4	273
E Recommended cabinet width	30	762
F Minimum inside height of cavity	10 3/4	273
G Minimum inside width of cavity*	28 1/2	724
H Minimum inside depth of cavity**	22 13/16	580
I Thickness of cabinetry front panel	5/8-13/16	16-20

*Including anti-tip brackets.
**Measured from front of chassis.


Cabinetry clearances	inch	mm
J Minimum clearance between adjacent front panel or appliance	1/16	2
K Minimum clearance above products front panel to upper cabinetry front panel or appliance*	5/32	4

*Achieve a smaller gap between product front panel to upper cabinetry front panel by dropping cabinetry front panel down.




ADJACENT CABINET

PLAN VIEW





ABOVE CLEARANCE

PROFILE VIEW



BOTTOM CLEARANCE

Requires no clearance

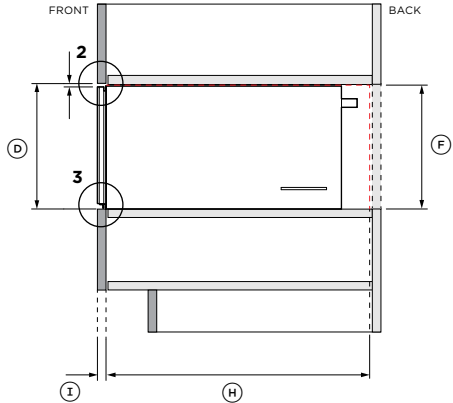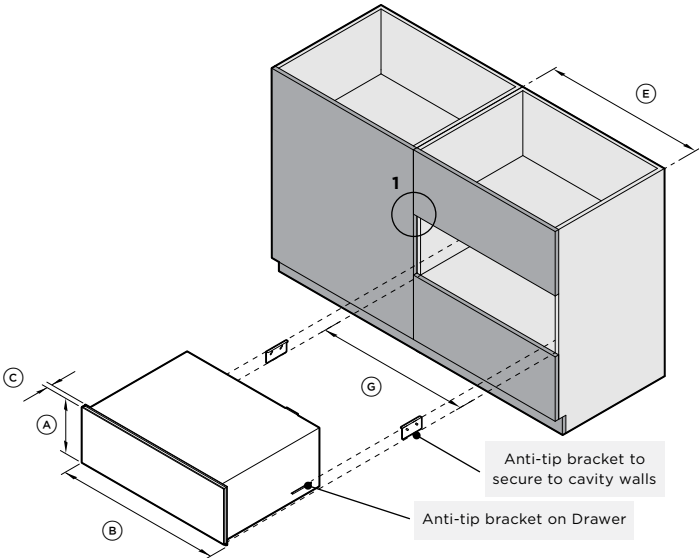


CABINETRY

PROFILE VIEW


The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](https://www.fisherpaykel.com)

Model no:		
VB30SDEI3 30" Series 9 Integrated Vacuum Seal Drawer		
Product Dimensions	inch	mm
(A) Overall height of product	10 11/16	271
(B) Overall width of product	29 7/8	758
(C) Thickness of custom front panel	min 5/8	min 16
Note: Maximum custom front panel weight 11 lb (5kg).		
Cabinetry Dimensions	inch	mm
(D) Recommended cabinet height - single install	10 3/4	273
(E) Recommended cabinet width	30	762
(F) Minimum inside height of cavity	10 3/4	273
(G) Minimum inside width of cavity*	28 1/2	724
(H) Minimum inside depth of cavity**	22 13/16	580
(I) Thickness of cabinetry front panel	5/8-13/16	16-20
*Including anti-tip brackets.		
**Measured from front of chassis.		
Cabinetry clearances	inch	mm
(J) Minimum clearance between adjacent front panel or appliance	1/16	2
(K) Clearance behind custom front panel for push-to-open mechanism*	1/16	2
(L) Minimum clearance above product custom front panel to upper cabinetry front panel or appliance	1/16	2
*A clearance of 1/16" (2mm) between the cabinet and the custom front panel is required for the push-to-open mechanism (spacer included).		
Note: Drawers can fully support 30inch Fisher & Paykel ovens, without adding shelf in between.		

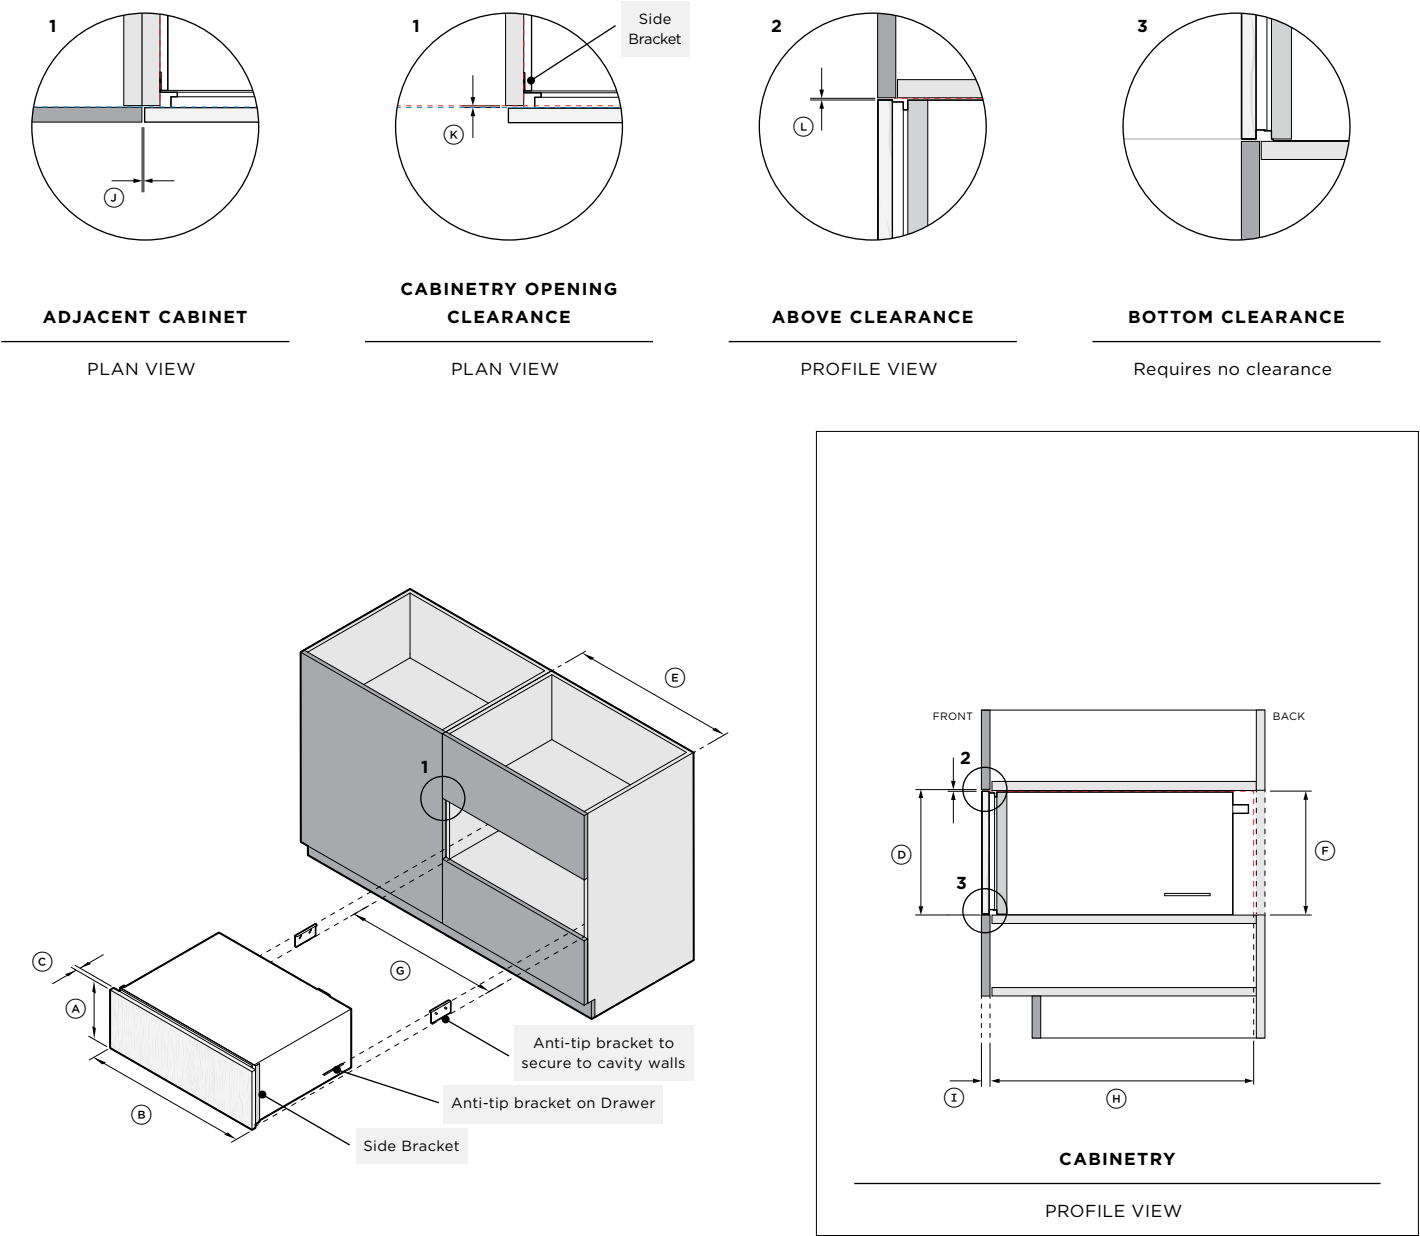

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com


SERVICES

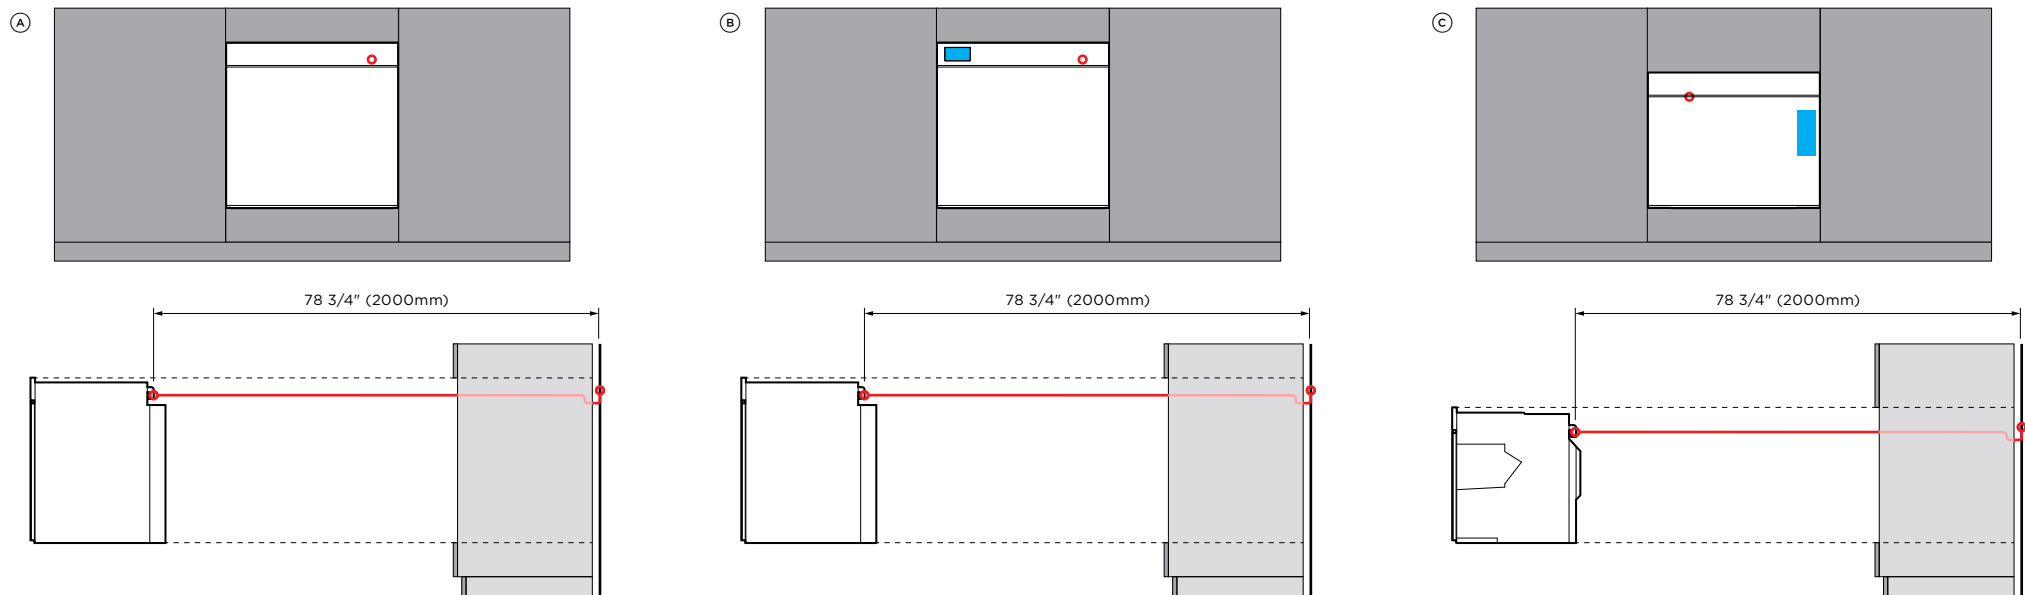

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

	(A) SELF-CLEANING OVEN OB30SMPUNB3, OB30SMPUNG3	(B) SELF-CLEANING STEAM ASSIST OVEN OB30SMPSUNB3, OB30SMPSUNG3	(C) COMBI-STEAM OVEN OS30SMUNB3, OS30SMUNG3
POWER CORD			
Maximum power cord length*	78 3/4" (2000mm)	78 3/4" (2000mm)	78 3/4" (2000mm)
Location	Upper right	Upper right	Upper Left
Connection**	Hard wired	Hard wired	Hard wired
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide.			
ELECTRICAL			
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz
Service	20 A	20 A	20 A
Note: Multiple product installation requires the design of power outlets according to local regulations.			
CAPACITY			
Total oven capacity	4.9cu ft (137L)	4.9cu ft (137L)	3cu ft (85L)
Total water tank capacity	-	22.65fl oz (0.67L)	47.3fl oz (1.4L)



The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website fisherpaykel.com

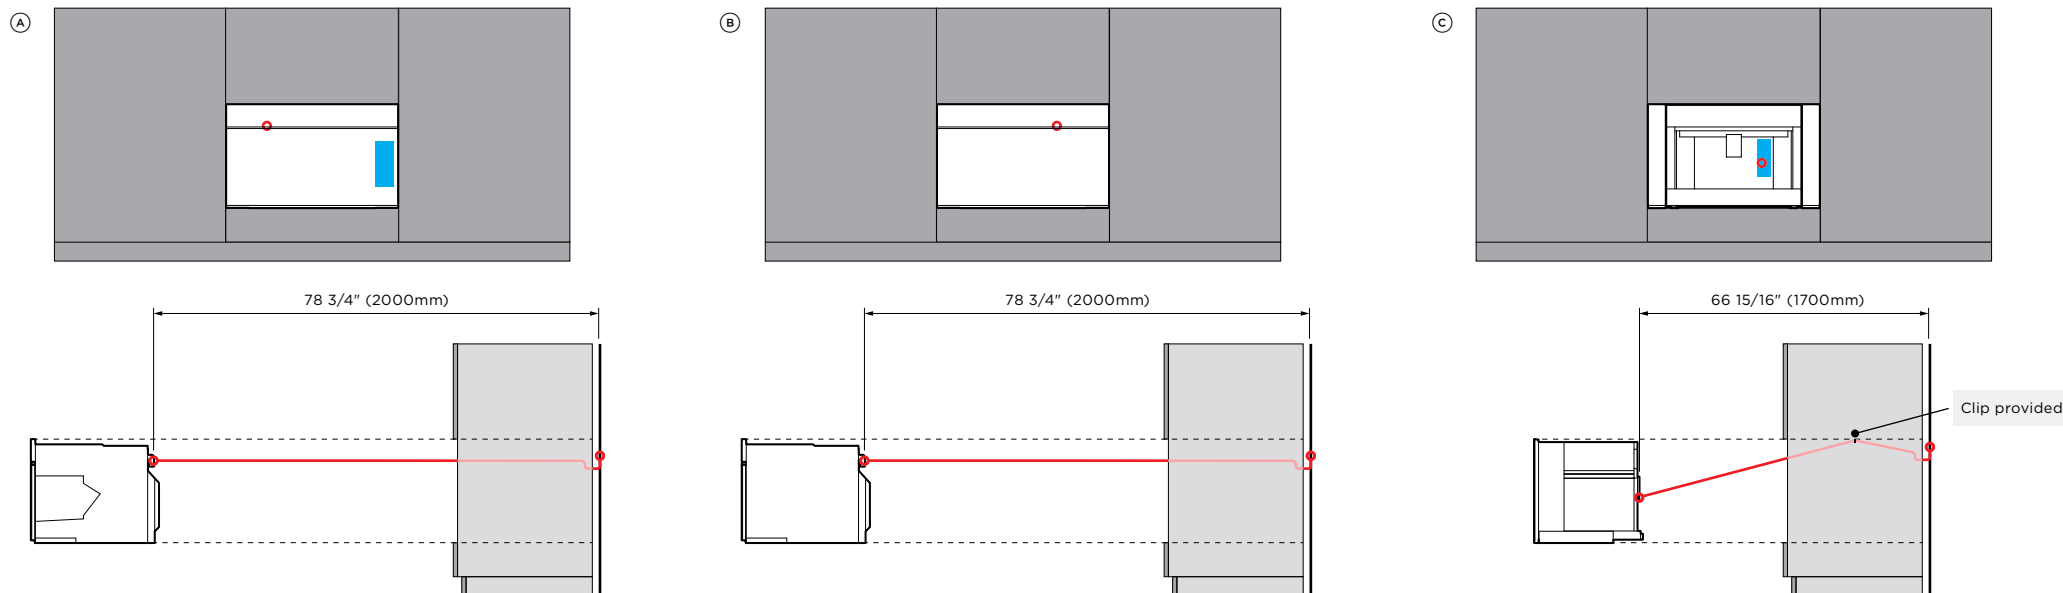

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

	(A) COMPACT COMBI-STEAM OVEN OS30NMUNB3, OS30NMUNG3	(B) COMPACT CONVECTION-SPEED OVEN OM30NMUNB3, OM30NMUNG3	(C) BUILT-IN COFFEE MAKER EB30MSB3
POWER CORD			
Maximum power cord length*	78 3/4" (2000mm)	78 3/4" (2000mm)	66 15/16" (1700mm)
Location	Upper Left	Upper right	Middle right
Connection**	Hard wired	Hard wired	Plug with flex cord
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide.			
ELECTRICAL			
Supply	208 or 240 V, 60 Hz	208 or 240 V, 60 Hz	120V, 60 Hz
Service	20 A	20 A	15 A
Note: Multiple product installation requires the design of power outlets according to local regulations.			
CAPACITY			
Total oven capacity	1.9cu ft (55L)	1.7cu ft (49L)	
Total water tank capacity	47.3fl oz (1.4L)	-	81 fl oz (2.4L)

PAGE 51

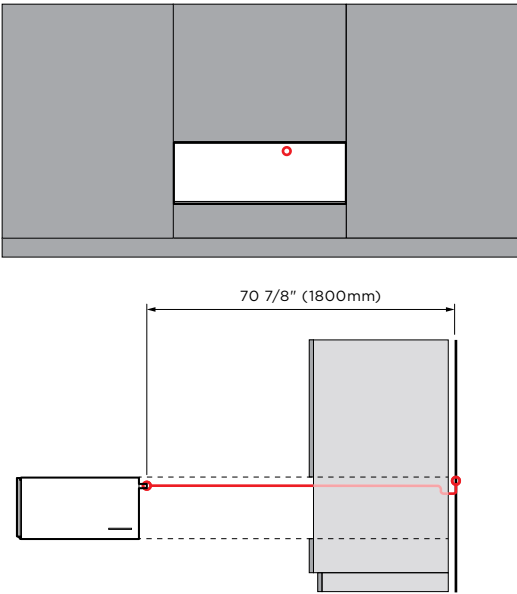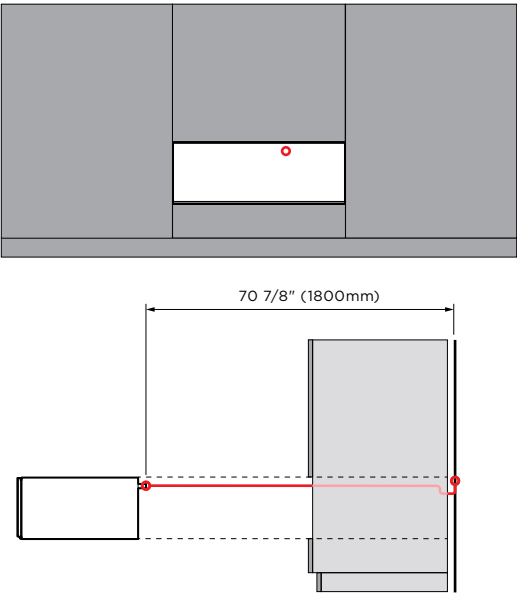

POWER CABLE

WATER TANK

POWER CORD	
Maximum power cord length*	
Location	
Connection**	
*Measured from power outlet, supplied with product. **For more information, refer to the Installation Guide.	
ELECTRICAL	
Supply	
Service	
Note: Multiple product installation requires the design of power outlets according to local regulations.	

CONNECTION

Connections may be located in an adjacent cabinet to either side of the appliance. Ensure power will remain accessible following install to allow access for any future product maintenance.

WARMING DRAWER AND INTEGRATED WARMING DRAWER	
WB30SMB3, WB30SMG3, WB30SDEI3	
	70 7/8" (1800mm)
	Upper right
	Plug with flex cord
	120V, 60 Hz
	15 A

VACUUM SEAL DRAWER AND INTEGRATED VACUUM SEAL DRAWER	
VB30SMB3, VB30SMG3, VB30SDEI3	
	70 7/8" (1800mm)
	Upper right
	Plug with flex cord
	120V, 60 Hz
	15 A

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available with the product on delivery and on our website [fisherpaykel.com](#)

