


PRODUCT DIMENSIONS

KRFF300E

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

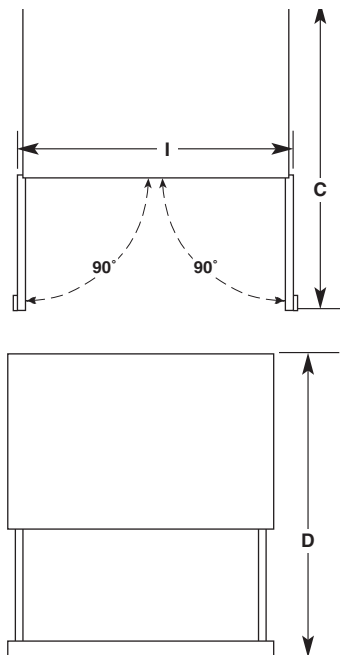

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
19.7	68⅝" (173.7 cm)	67½" (171.5 cm)	44⅞" (112.1 cm)	52" (132.1 cm)	34⅞" (88.6 cm)	32¼" (81.9 cm)	28" (71.1 cm)	30⅞" (76.5 cm)	33⅞" (86.4 cm)

$\frac{1}{2}$ " (1.25 cm)

2" (5.08 cm)

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.